

Data sheet

Electronic Ignition Units EBI4, 120 V Series

Application



The EBI4, 120 V series is electronic ignition units for intermittent ignition between 2 electrodes or 1 electrode and frame in small and medium size oil or gas burners.

Low weight and small dimensions, due to high frequency operation, makes the EBI4, 120 V series very suitable for use in modern compact burners.


Connections with a plug on the primary side and bushes on the secondary side make installation and service quick and simple.

Applications and Features

- 1- or 2-pole ignition
- Low power consumption due to high efficiency (new technology)
- Earth connection through the primary cable or through the earth terminal on the side
- Same dimensions and flexible mounting as the well-known EBI3 series
-  marking in accordance with the directives: EMC, LVD, RoHS


EBI4 M, 120 V

- Oil/gas burners
- 2-pole ignition
- Secondary mid-point connected to earth/frame
- 33% ED at 60°C
- Front connection for secondary cables
- 120 V

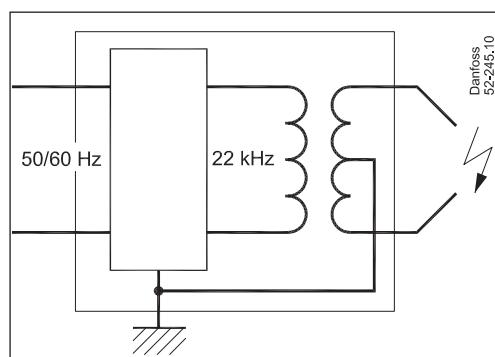

EBI4 1P, 120 V


- Gas burners
- 1-pole ignition between 1 electrode and frame
- 33% ED at 60°C
- Front connection for secondary cables
- 120 V

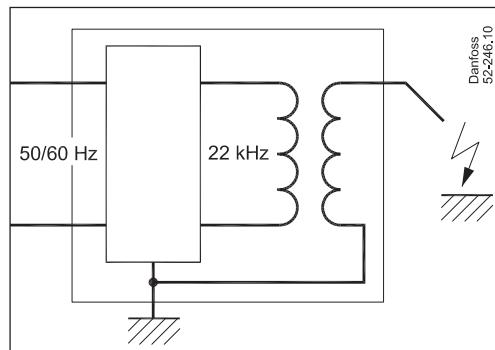

Data sheet**Electronic Ignition Units EBI4, 120 V Series****Technical data**

Type	EBI4 M, 120 V	EBI4 1P, 120 V
Mains connection	120 V - 0.40 A - 50/60 Hz - 50 VA	
Working range	102 - 132 V	
Main fuse		max. 10 A
Secondary connection*		
Short circuit current	2 x 7.5 kV amp.	12 kV amp.
Frequency	40 mA (rms) 22 kHz	40 mA (rms) 22 kHz
ED in 3 minutes (cutting in)	33% at 60°C	
Ambient temperature		-10 to +60°C
Storage temperature		-25 to +85°C
Enclosure	IP 40 (not for secondary connections)	
Primary connection	3 x 0.5 mm ² cable with special plug	
Secondary connections	2 x Ø4 mm plugs	1 x Ø4 mm plugs
Earth connection	Through the primary cable or earth terminal on side	
Distance between electrodes	Recommended 2.5 mm to 5 mm	
Weight	235 g	

* Avoid use of divergent electrodes due to risk of electrical cable break down and too high ignition voltage.

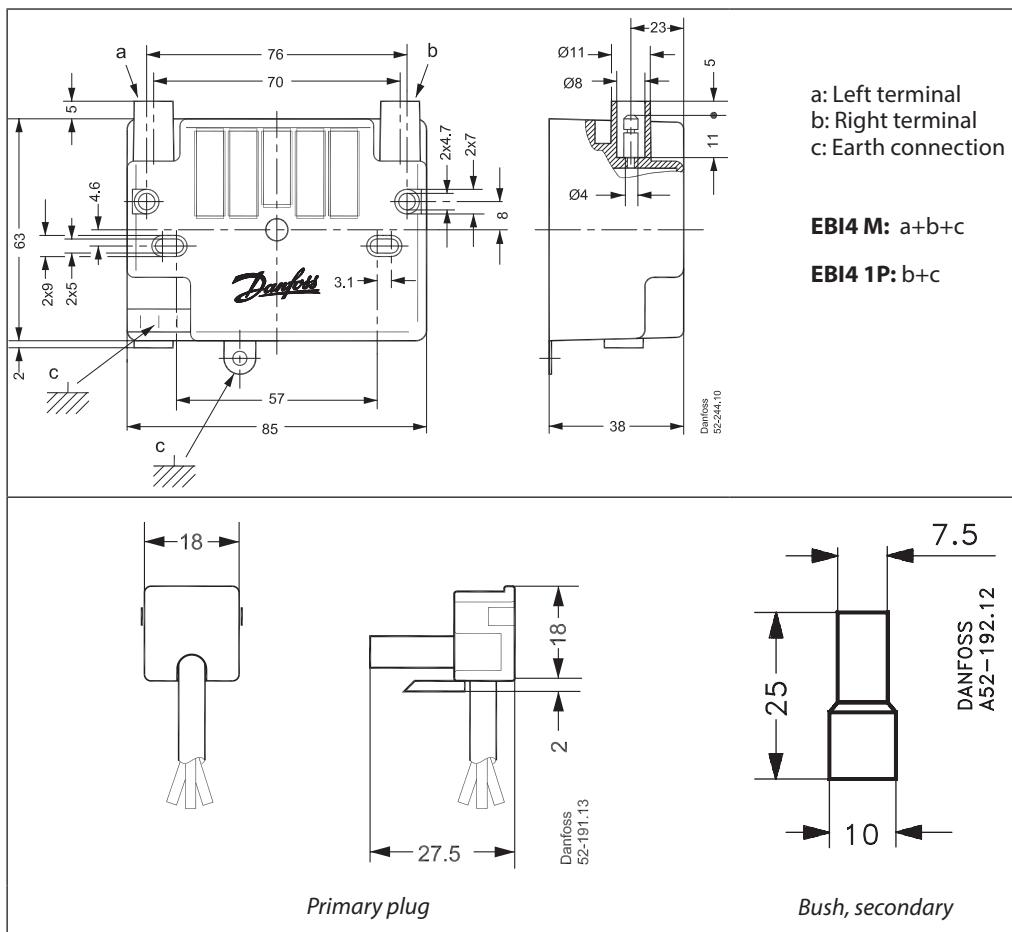Dimensions and connections

Additional documentation on burner components is available on <http://danfoss.com/>

Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues, descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.