# **Solenoid Valves**

# SV08-24-08


Solenoid Valve, 4-way, 2-position, Spool Type

230 bar [3300 psi] • 18 l/min [4.7 US gpm]

## **OPERATION AND DESCRIPTION**


This is a 4-way, 2-position, spool type, direct acting solenoid valve. In the de-energized condition, ports 2 and 4 are open to port 1 with port 3 closed. When energized, port 1 is open to 2 and port 3 to 4. In the de-energized condition, these valves can allow a motor into a free-wheel mode or a cylinder to float condition. Energizing the valve will provide unidirectional flow. Always check the operating envelope to make sure the valve will work under the required application conditions. Port 1 is not intended for use as inlet (Tank only).

## **SCHEMATIC**



## DIMENSIONS

#### mm [in]

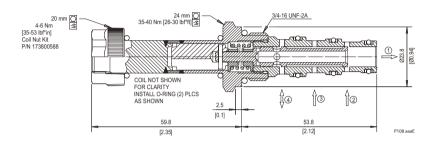


#### **■ PERFORMANCE DATA**

| Rated Pressure* | 230 bar [3300 psi]**  |  |
|-----------------|-----------------------|--|
| Flow Capability | 18 l/min [4.7 US gpm] |  |
| Coil Options    | M13, R13              |  |
| Weight          | 0.45 kg [0.99 lb]     |  |
| Cavity          | SDC08-4               |  |


<sup>\*</sup>Rated Pressure based on NFPA fatigue test standards (at 1 million cycles)

## **PERFORMANCE CURVES**



1) 3 to 4 to 2 to 1 Energized 2) 4 to 1 De-Energized 3) 2 to 1 De-Energized

#### Operating envelope



#### **MODEL CODE**

# SV08 - 24 - 08 - 12D - DE - B - 4S

# Coil Voltage

| Robust<br>Coil Code | Coil<br>Voltage                          |
|---------------------|--|
| ROO                 | No Coil, nut included*                   |
| R10D                | 10 VDC                                   |
| R12D                | 12 VDC                                   |
| R20D                | 20 VDC                                   |
| R24D                | 24 VDC                                   |
|                     | 110 VAC**                                |
|                     | 220 VAC**                                |
|                     | Coil Code<br>R00<br>R10D<br>R12D<br>R20D |

<sup>\*</sup>Standard Coil - Plastic coil nut and o-rings (p/n 173800588)

#### **Connector Type**

| Standard<br>Coil Code | Robust<br>Coil Code | Connector<br>Type        |
|-----------------------|---------------------|--------------------------|
| 00                    | 00                  | No Coil                  |
| AJ                    |                     | Amp Junior               |
| AJD                   |                     | Amp Junior with Diode    |
| AS                    | AS                  | AMP SuperSeal 1.5        |
| ASD                   | ASDB*               | AMP SuperSeal with Diode |
| DE                    | DE                  | Deutsch                  |
| DED                   | DEDB*               | Deutsch with Diode       |
| FL                    | FL                  | Flying Leads             |
| FLD                   | FLDB*               | Flying Leads with Diode  |
| DN                    |                     | DIN 43650                |
| *Bi-directional d     | iode                |                          |

#### Housin

| Code | Ports          | Housing Model Code |
|------|----------------|--------------------|
| 00   | No Housing     |                    |
| 45   | #4 SAE, AL     | CP08-4-4S          |
| 6S   | #6 SAE, AL     | CP08-4-6S          |
| S6S  | #6 SAE, Steel  | CP08-4-S6S         |
| L2B  | 1/4 BSP, AL    | SDC08-4-L2B        |
| S3B  | 3/8 BSP, Steel | CP08-4-S3B         |
|      |                |                    |

<sup>\*</sup> Aluminum bodies are to be used for pressures less than 210 bar [3000 psi].

#### **Seal Option**

| Code               | Seal kit  |
|--------------------|-----------|
| <b>B</b> -Buna - N | 354003319 |
| <b>V</b> -Viton    | 354003919 |

<sup>\*\*</sup>Valve can operate with an inlet pressure of 315 bar [4600 psi] at port 3 for 500,000 cycles

<sup>\*</sup>Robust Coil - Steel coil nut and no o-rings (p/n 173800539)

<sup>\*\*</sup>DIN only - external rectifier needed

<sup>\*</sup> Additional housings available