



# Cartridge Valves Technical Information Introduction

## Contents

IN	Introduction
CV	Check Valves
SH	Shuttle Valves
RV	Relief Valves
PR	Pressure Reducing Valves
SQ	Sequence and Unloading Valves
FC	Flow Control Valves
PO	Pilot Operated Check Valves
CB	Counterbalance Valves
DV	Directional Control Valves
LE	Logic Elements
SV	Solenoid Valves
PV	Proportional Valves
FD	Fan Drive HICs
MM	Motor Mount HICs
TR	Traction Control HICs
SP	Spreader Valve HICs
MX	Mix-N-Match Dual Bodies
D3	DCV03 Solenoid Valves
D5	DCV05 Solenoid Valves
AC	Accessories
CA	Cavities
HS	Housings
CL	Coils
CR	Cross Reference
ID	Index



### CARTRIDGE VALVE INTRODUCTION

Cartridge valves are compact and economical components that can be used for directional, pressure, or flow control in systems from 0.4 L/min [0.1 US gal/min] up to 400 l/min [100 gpm], and for pressures up to 350 bar [5000 psi]. By combining standard cartridge valves almost any hydraulic circuit can be easily created. Using cartridge valves in a custom manifold, a designer can create a hydraulic integrated circuit (HIC) that provides a compact package for hydraulic control with reduced plumbing, easier installation, easier service, and fewer leak points than traditional hydraulic systems.

Each valve has several key ratings, specifications, and settings:

- Each Danfoss ICS cartridge valve fits a Danfoss ICS standard **cavity**. These cavities are designed around SAE or metric standard o-ring straight thread ports. In many cases these cavities are interchangeable with cavities used by other manufacturers. See catalog sheets for details.
- The **pressure rating** is based on NFPA T.2.6.1 fatigue test standards and a burst test with a minimum safety factor of 3:1
- The **flow rating** is based on the flow at a pressure drop of 7 bar [100 psi] for directional valves or a pressure rise or drop of 7 bar [100 psi] for pressure relief and reducing valves, with 32 mm<sup>2</sup>/s (cSt) [151 SUS] fluid. Note that for many valves this flow can be exceeded if the resulting higher pressure drop and the associated heat generation are acceptable. The exceptions to this are solenoid-operated spool-type directional valves and proportional flow control valves where the flow ratings indicate a performance limit.
- The **solenoid voltage** is a nominal value. All solenoid valves are designed to operate at 85% of nominal voltage with full rated flow and pressure and at an ambient temperature of 40 °C [104 °F].
- Pressure settings for check, relief, reducing, sequence, and motion control valves, commonly referred to as the **crack pressure**, are set at a flow rate of 0.95 L/min [0.25 gpm] through the valve.
- **Leakage** is generally measured at rated pressure limits or in the case of relief and motion control valves at 70-80% of crack pressure setting, with 32 mm<sup>2</sup>/s (cSt) [151 SUS] fluid. See individual catalog sheets for details.
- **Temperature ratings** vary by model and options. Seal materials provide ranges of -40 °C to 100 °C [-40° F to 212 °F] (buna-n or polyurethane) or -26 °C to 204 °C [-15 °F to 400 °F] (viton). The recommended minimum fluid viscosity is 12 mm<sup>2</sup>/s (cSt) [66 SUS] which will override the maximum seal temperature limit for most fluids. Solenoid valves are rated for 60 °C [140 °F] maximum *ambient* temperature for continuous duty. Consult factory for extreme applications.



## Cartridge Valves Technical Information Introduction

### Fluid and filtration recommendations

#### FLUIDS

Ratings and performance data for cartridge valves are based on operating with premium hydraulic fluids containing oxidation, rust, and foam inhibitors.

These premium fluids include premium turbine oils, API CD engine oils per SAE J183, M2C33F or G automatic transmission fluids (ATF), Dexron II (ATF) meeting Allison C-3 or Caterpillar TO-2 requirements, and certain specialty agriculture tractor fluids. For further information see Danfoss publication **520L0463**, *Hydraulic Fluids and Lubricants Technical Information*.

#### CAUTION

**Never mix hydraulic fluids.**

Product performance will generally be within catalog limits with fluids meeting the recommended viscosity limits shown below.

Product can be operated at viscosities outside the recommended limits, however performance may be greatly degraded. Extreme conditions must be evaluated by the user to determine acceptability of product performance.

Contact your Danfoss ICS representative for more information regarding fluids.

#### FILTRATION

It is imperative that only clean oil be used with cartridge valves to maintain valve operation and prevent premature wear. System filtration capable of controlling the fluid cleanliness to the limits shown below is required.

The selection of filters depends on a number of factors including the contamination ingress rate and the desired maintenance interval. Filters are selected to meet the below requirements using rating parameters of efficiency and capacity.

Filter efficiency may be measured using a Beta ( $\beta$ ) ratio.\* A filter with a  $\beta$ -ratio within the range of  $\beta_{10}=10$  is typically required.

Since each system is unique, the filtration requirement for that system will be unique and must be determined by test in each case. It is essential that monitoring of prototypes and evaluation of components and performance throughout the test program be the final criteria for judging the adequacy of the filtration system. For further information see Danfoss publication **520L0467**, *Design Guidelines for Hydraulic Fluid Cleanliness Technical Information*.

#### Fluid specifications

Product	Cleanliness (per ISO 4406, 1999)	Recommended Viscosity limits mm <sup>2</sup> /sec (cSt) [SUS]	Absolute Viscosity limits mm <sup>2</sup> /sec (cSt) [SUS]
Cartridge and Electrohydraulic valves	18/16/13 or better	12-54 [66-250]	12-400 [66-1854]

\* Filter  $\beta_x$  ratio is a measure of filter efficiency defined by ISO 4572. It is defined as the ratio of the number of particles greater than a given size (x) upstream of the filter to the number of particles greater than the same size downstream of the filter. The  $\beta_x$  ratio applies to a specific particle size, measured in microns.



# Cartridge Valves Technical Information Introduction

## Standard pressure settings and adjustment options

### STANDARD PRESSURE SETTINGS

The tables below detail coding for standard pressure settings. Use these tables for reference when filling in valve ordering options for valves with selectable pressure settings. Use the table on this page for valves that specify pressure in psi—typically those beginning with the letters CP. Use the table on the next page for valves that specify pressure in bar—typically those that do not begin with the letters CP.

*Standard settings for valves set in psi*

Crack Pressure (Code x 10 = psi)	Crack Pressure, psi [bar]
001	10 psi [0.69 bar]
002	20 psi [1.38 bar]
003	30 psi [2.07 bar]
004	40 psi [2.76 bar]
005	50 psi [3.45 bar]
006	60 psi [4.14 bar]
007	70 psi [4.83 bar]
008	80 psi [5.52 bar]
009	90 psi [6.21 bar]
010	100 psi [6.9 bar]
012	120 psi [8.28 bar]
014	140 psi [9.66 bar]
015	150 psi [10.34 bar]
016	160 psi [11.0 bar]
018	180 psi [12.4 bar]
020	200 psi [13.8 bar]
022	220 psi [15.2 bar]
024	240 psi [16.6 bar]
025	250 psi [17.2 bar]
026	260 psi [17.9 bar]
028	280 psi [19.3 bar]
030	300 psi [20.7 bar]
035	350 psi [24.1 bar]
040	400 psi [27.6 bar]
045	450 psi [31.0 bar]
050	500 psi [34.5 bar]
060	600 psi [41.4 bar]
070	700 psi [48.3 bar]
080	800 psi [55.2 bar]
090	900 psi [62.1 bar]
100	1000 psi [69.0 bar]
110	1100 psi [75.9 bar]
120	1200 psi [82.8 bar]
130	1300 psi [89.7 bar]
140	1400 psi [96.6 bar]

Crack Pressure (Code x 10 = psi)	Crack Pressure, psi [bar]
150	1500 psi [103 bar]
160	1600 psi [110 bar]
170	1700 psi [117 bar]
180	1800 psi [124 bar]
190	1900 psi [131 bar]
200	2000 psi [138 bar]
210	2100 psi [145 bar]
220	2200 psi [152 bar]
230	2300 psi [159 bar]
240	2400 psi [166 bar]
250	2500 psi [172 bar]
260	2600 psi [179 bar]
270	2700 psi [186 bar]
280	2800 psi [193 bar]
290	2900 psi [200 bar]
300	3000 psi [207 bar]
320	3200 psi [221 bar]
340	3400 psi [234 bar]
350	3500 psi [241 bar]
360	3600 psi [248 bar]
380	3800 psi [262 bar]
400	4000 psi [276 bar]
420	4200 psi [290 bar]
440	4400 psi [303 bar]
460	4600 psi [317 bar]
480	4800 psi [331 bar]
500	5000 psi [345 bar]
520	5200 psi [359 bar]
540	5400 psi [372 bar]
560	5600 psi [386 bar]
580	5800 psi [400 bar]
600	6000 psi [414 bar]
XXX	Standard pressure setting; refer to cartridge individual catalog page for standard setting value



# Cartridge Valves Technical Information Introduction

## Standard pressure settings and adjustment options

### STANDARD PRESSURE SETTINGS (continued)


Standard settings for valves set in bar

Crack Pressure Code (bar)	Crack Pressure, bar [psi]
10	10 bar [145 psi]
15	15 bar [218 psi]
20	20 bar [290 psi]
25	25 bar [363 psi]
30	30 bar [435 psi]
35	35 bar [508 psi]
40	40 bar [580 psi]
45	45 bar [653 psi]
50	50 bar [725 psi]
55	55 bar [798 psi]
60	60 bar [870 psi]
65	65 bar [943 psi]
70	70 bar [1015 psi]
75	75 bar [1088 psi]
80	80 bar [1160 psi]
85	85 bar [1233 psi]
90	90 bar [1305 psi]
95	95 bar [1378 psi]
100	100 bar [1450 psi]
105	105 bar [1523 psi]
110	110 bar [1595 psi]
120	120 bar [1740 psi]
130	130 bar [1885 psi]


Crack Pressure Code (bar)	Crack Pressure, bar [psi]
140	140 bar [2030 psi]
150	150 bar [2175 psi]
160	160 bar [2320 psi]
170	170 bar [2465 psi]
180	180 bar [2610 psi]
190	190 bar [2755 psi]
200	200 bar [2900 psi]
210	210 bar [3045 psi]
220	220 bar [3190 psi]
230	230 bar [3335 psi]
240	240 bar [3480 psi]
250	250 bar [3625 psi]
260	260 bar [3770 psi]
270	270 bar [3915 psi]
280	280 bar [4060 psi]
290	290 bar [4205 psi]
300	300 bar [4350 psi]
310	310 bar [4495 psi]
320	320 bar [4640 psi]
330	330 bar [4785 psi]
340	340 bar [4930 psi]
350	350 bar [5075 psi]
XXX	Pressure code stamped on valve; Pressure not set

### MECHANICAL VALVE ADJUSTMENT OPTIONS


Adjustment options - CP valves




A - internal adjustment



F - tamper resistant




E - external adjustment




K - knob adjustment


Adjustment options - other valves



M - handwheel



EN - external



E - internal



# Cartridge Valves Technical Information Introduction

## Cartridge valve installation procedure

### INSPECT THE VALVE BLOCK

Refer to specific pages within this catalog to ensure proper port identification for cartridge functions. Inspect the valve cavity to be sure it is free of burrs, chips or other contamination.

### PREPARE CARTRIDGE FOR INSERTION INTO THE BLOCK

Check the cartridge to ensure it is free of external contamination, and the O-rings and back-up rings are intact. Dip the cartridge in clean oil to the top of the threads to lubricate the O-rings.

### ASSEMBLY

Insert and screw the cartridge into its cavity by hand. It should turn easily up to the top O-ring. If it does not turn easily, the cavity has been machined improperly and the body should not be used.


Torque all cartridges per specification shown on catalog sheet. Torque all coil nuts to 5-8 N·m [4-6 lbf·ft] unless otherwise specified.

### TEST


Test the entire system to ensure that the cartridges are performing correctly and to check for leaks.

### CAVITY PORT IDENTIFICATION


*Cavity 2 way*




*Cavity 3 way*



*Cavity 4 way*

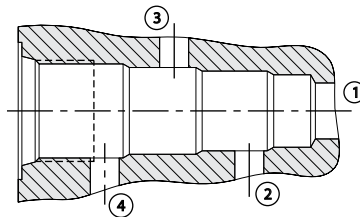

*Cavity 5 way*

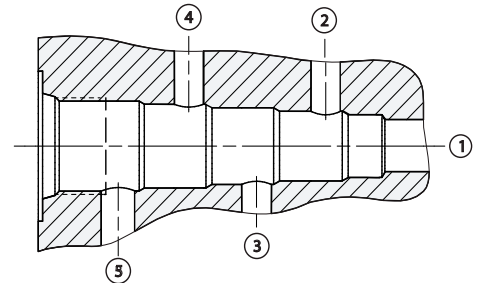



## Cartridge Valves Technical Information Introduction

### Hydraulic integrated circuits

#### DESCRIPTION

Cartridge valves can be installed in custom designed manifolds to create a **Hydraulic Integrated Circuit (HIC)**. HICs provide many advantages over traditional hydraulic control systems:

- HICs are compact packages that simplify machine plumbing, reducing costs for fittings, tubes, hoses, and installation.
- Leak points are eliminated.
- Service time and costs are dramatically reduced. Components can be replaced without disturbing machine plumbing.
- HICs can be centralized on a machine or strategically located near a function. Using a custom HIC provides the designer unlimited flexibility to optimize machines for assembly, plumbing, wiring, service, and weight distribution.



#### DESIGN CAPABILITIES

A custom HIC can be specified and designed to meet your circuit requirements using Danfoss's **EasyManifold** tool.

- EasyManifold allows you to effortlessly create your hydraulic circuit schematic from Danfoss's digital library of cartridge valves using a drag and drop interface.
- With the new Automatic Design feature, small to medium sized HIC designs can now be completed through the tool. At the click of a button, your project can be submitted and EasyManifold will generate a 2D drawing and 3D model. In less than an hour, you can take your project from a concept to a design ready for manufacturing.
- For larger HICs, manifolds are designed using our state of the art CAD software by our regional HIC engineering design teams.



HICs can be designed with custom interfaces to mount directly to other Danfoss products, including stackable spool valves and motors. This provides a compact and efficient hybrid solution to meet your machine requirements.

Industry-leading rapid prototyping is available globally to support your program requirements.



## Cartridge Valves Technical Information Introduction

### Hydraulic integrated circuits

#### PRODUCTION CAPABILITIES

- Manifolds are machined from 6061-T6 or 2011 aluminum (for pressures to 210 bar [3,000 psi]) or ductile iron (pressures to 480 bar [7,000 psi]).
- State-of-the art flexible CNC machining centers are used to maintain the highest quality standards.
- All manifolds go through extensive deburring and cleaning operations.
- Aluminum manifolds can be finished with clear or color anodizing on request for added cleanliness, enhanced corrosion resistance, and improved appearance.
- Ductile iron manifolds are zinc plated.

*HIC Assembly*



*Clear plastic training aid*



- HICs are 100% tested on computerized test stands. Performance requirements are unique for each custom HIC and are agreed to by Danfoss ICS and the customer prior to production.
- HICs can be supplied with hydraulic fittings installed upon request.
- All HICs are identified with a Danfoss part number and manufacturing date code. HICs can also be manufactured with customer specified part numbers, logos, etc., upon request.