

Data sheet

Micro plate heat exchanger (MPHE): XB12

Description



Micro Plate Heat Exchangers - a revolutionary technology from Danfoss. Characterized by their unique plate pattern, MPHEs enable heat to be transferred more efficient than any previous model of heat exchangers.

Benefits:

- Energy and cost savings
- Better heat transfer
- Lower pressure loss
- More flexible design
- Longer life time

more on:

districtenergy.danfoss.com (MPHE)

XB12 is copper brazed heat exchanger, designed and configured for District Heating, District Cooling and other Heating applications. Heat exchanger XB12 will be available in plate corrugation H, M and L. It will be available in 1-pass (with 4 connections) and 2-pass version (with 6 connections). Heat exchangers can be dimensioned in Danfoss calculation software "Hexact" which can be downloaded from hexact.danfoss.com.

Approval:

Pressure Equipment Directive (PED) 97/23/EC.

Ordering

1-pass heat exchanger **XB12** with G 1 1/4" connection size ¹⁾

Picture	No. of plates, n	Connection	XB12H-1	XB12M-1	XB12L-1
			Code No.		
	10	Thread G 1 1/4"	004H7555	004H7540	004H7525
	16		004H7556	004H7541	004H7526
	20		004H7557	004H7542	004H7527
	26		004H7558	004H7543	004H7528
	30		004H7559	004H7544	004H7529
	36		004H7560	004H7545	004H7530
	40		004H7561	004H7546	004H7531
	50		004H7562	004H7547	004H7532
	60		004H7563	004H7548	004H7533
	70		004H7564	004H7549	004H7534
	80		004H7565	004H7550	004H7535
	90		004H7566	004H7551	004H7536
	100		004H7567	004H7552	004H7537
	110		004H7568	004H7553	004H7538
	120		004H7569	-	-
	140		004H7570	-	-

¹⁾ Available also with 1 inch connection size. Please contact your Danfoss representative.

2-pass heat exchanger **XB12** with G 1 1/4" connection size ¹⁾

Picture	No. of plates ²⁾ , n	Connection	XB12H-1	XB12M-1	XB12L-1
			Code No.		
	20/20	Thread G 1 1/4"	004H7596	004H7584	004H7572
	26/26		004H7597	004H7585	004H7573
	30/30		004H7598	004H7586	004H7574
	36/36		004H7599	004H7587	004H7575
	40/40		004H7600	004H7588	004H7576
	46/46		004H7601	004H7589	004H7577
	50/50		004H7602	004H7590	004H7578
	56/56		004H7603	004H7591	004H7579
	60/60		004H7604	004H7592	004H7580
	66/66		004H7605	004H7593	004H7581
	70/70		004H7606	004H7594	004H7582

¹⁾ Available also with 1 inch connection size. Please contact your Danfoss representative.

²⁾ First pass/second pass

Ordering (continued)

Accessories:

Insulation for 1-pass

EPP (Expanded Polypropylene) insulation

No. of plates	Type coverage (plate number)		
	H	M	L
10	004H4201	004H4201	004H4201
16			
20			
26			
30			
36			
40	004H4202	004H4202	004H4202
50			
60			
70			
80	004H4203	004H4203	004H4203
90			
100			
110			
120	1)	-	-
140		-	-

¹⁾ EPP insulation is not available please order PU insulation for this size.

PU (Polyurethane) insulation

No. of plates	Type coverage (plate number)		
	H	M	L
10	004H4210	004H4210	004H4210
16			
20			
26			
30			
36			
40	004H4211	004H4211	004H4211
50			
60			
70			
80	004H4212	004H4212	004H4212
90			
100			
110			
120	004H4213	-	-
140		-	-

Accessories:

Insulation for 2-pass

EPP (Expanded Polypropylene) insulation

Type coverage (plate number)			
No. of plates	H	M	L
20/20	004H4201	004H4201	004H4202
26/26	004H4202	004H4202	
30/30			
36/36			
40/40	004H4203	004H4203	004H4203
46/46			
50/50			
56/56			
60/60	1)	1)	1)
66/66			
70/70			

¹⁾ EPP insulation is not available please order PU insulation for this size.

PU (Polyurethane) insulation

No. of plates	Type coverage (plate number)		
	H	M	L
20/20	004H4210	004H4210	004H4211
26/26			
30/30			
36/36			
40/40	004H4211	004H4211	004H4212
46/46			
50/50			
56/56			
60/60	004H4212	004H4212	004H4213
66/66			
70/70			

Accessories-Tailpieces

Picture	Description	Connection	Code No. ¹⁾
	Solder tailpieces	G 1 1/4" / 28 mm	004B1358
		G 1" / 22 mm	004B2906
		G 1" / 18 mm	004B2905
		G 1" / 15 mm	004B2904
	Weld-on tailpieces	G 1" / DN 20	003H6909
		G 1 1/4" / DN 25	003H6910
	Threaded tailpieces	G 1 1/4" / G 1"	004H4205
		G 1 1/4" / G 1 1/2"	004H4206
		G 1" / G 3/4"	004B2913

¹⁾ One set contains 2 tailpieces with union nuts and gaskets


Accessories-Bracket ¹⁾

Picture	Connection	Code No.
	Thread G 1 1/4"	004H4200
	Thread G 1"	004B2919

¹⁾ Bracket set consist of bracket and 2 seeger rings

Design and function

- T11** - Primary side in
- T12** - Primary side out
- T112** - Primary side second inlet (2-pass)
- T21** - Secondary side in
- T22** - Secondary side out
- T212** - Secondary side second inlet (2- pass)

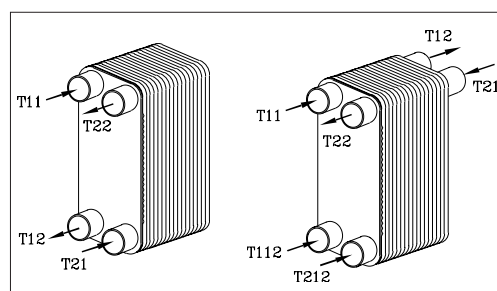

Danfoss 2 pass heat exchangers are made with 6 connections, as they are primarily used to heat tap water.

There is one additional connection to allow circulation of hot water and one connection to connect and extract heat from return water from heating heat exchanger. Connections T112 and T212 can be blocked if they are not used.


Technical data

Type		XB12L-1	XB12M-1	XB12H-1
Max. working pressure	bar	25		
Min. / Max. temperature	°C	-10 / 180		
Flow medium		DH: Circulation water / glycolic water up to 50% DC: ethylene-, propylene-glycolic water, ethanol-water solutions and other suitable heat transfer media. (Please contact your Danfoss representative).		
Volume/channel	Ltr	0,045	0,035	0,029
Connection type		Cylindrical external thread acc. to DIN ISO 228/1		
Connection size		G 1 ¼" or G 1"		
Weight	kg	1-pass: G 1 ¼" / G 1" connection: 1,53+0,076*n / 1,36+0,076*n		
		2-pass: G 1 ¼" / G 1" connection: 1,77+0,076*n / 1,52+0,076*n		
Materials				
Plate		Stainless steel, EN 1.4404 (AISI 316L)		
Brazing		Copper		


Insulation

Type		PU (Polyurethane)	EPP (Expanded Polypropylene)
Heatconductivity, λ	W/mK	0,035	0,038
Max temperature	Permanent	130	110
	Short term peak	160	
Wall thickness	mm	20	30

Dimensions ¹⁾

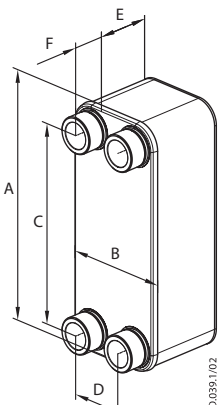

XD.039.1/02

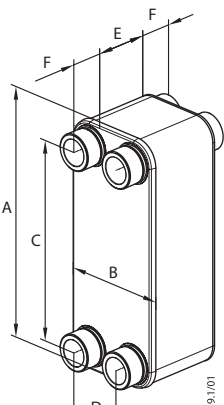


XD.039.1/01

Type	Connection	
	G 1 ¼" ¹⁾	G 1" ¹⁾
A	289	
B	118	
C	234	235
D	63	65
F	25	20


Type	E (mm)
XB12L	n × 1,75 + 10 (+0,5/-3%)
XB12M	n × 1,40 + 10 (+0,5/-3%)
XB12H	n × 1,2 + 10 (+0,5/-3%)

n = number of plates
¹⁾ Cylindrical external thread acc. to DIN ISO 228/1

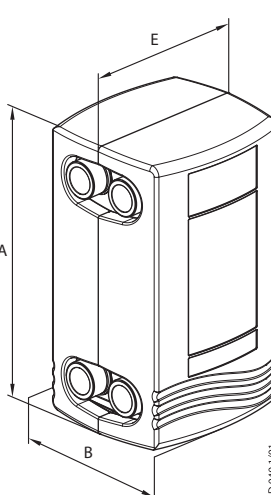

XD.040.1/01

PU - insulation

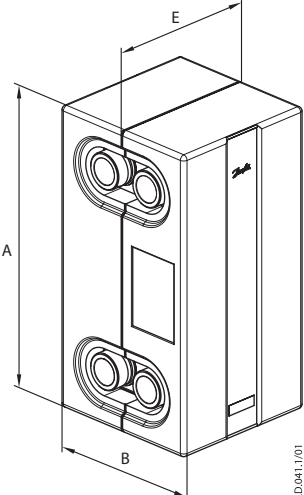

XD.041.1/01

EPP - insulation

Insulation

Type	mm			Code No.
	A	B	E	
EPP	352	185	130	004H4201
			180	004H4202
			235	004H4203
PU	336	176	135	004H4210
			184	004H4211
			185	004H4212
			188	004H4213
			200	004H4214


¹⁾ Dimensions can be as well extract from Danfoss calculation software "Hexact" which can be downloaded from hexact.danfoss.com.

Data sheet




Micro plate heat exchanger XB12

Dimensions (continuous)

Mounting bracket

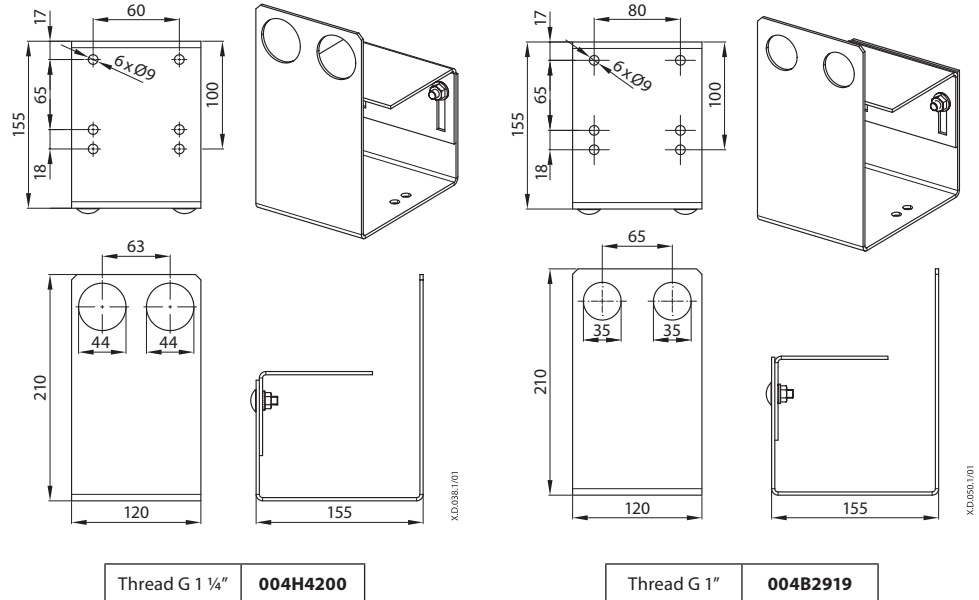

Tailpieces

Picture	Description	Connection	Code No.	a	b	SW ¹⁾
				mm		
	Solder tailpieces	G 1 1/4" / 28 mm	004B1358	25,4 / 28	33	46
		G 1" / 22 mm	004B2906	25,6	35	37
		G 1" / 18 mm	004B2905	20	35	37
		G 1" / 15 mm	004B2904	20	35	37
	Weld-on tailpieces	G 1" / DN 20	003H6909	26	49,5	41
		G 1 1/4" / DN 25	003H6910	33	49,5	50
	Threaded tailpieces	G 1 1/4" / G 1"	004H4205	1"	40	46
		G 1 1/4" / G 1 1/2"	004H4206	1 1/2"	60	46
		G 1" / G 3/4"	004B2913	3/4"	35	37

¹⁾ Union nut, width across flats

Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.