

ENGINEERING
TOMORROW

Danfoss

Product Details

Synflex Eclipse Air Brake Tubing **overshadows the competition**



Synflex
by Danfoss



Applications

- Truck Air Brake Systems
- Trailer Air Brake Systems
- Auxiliary Air Systems
- Formed Tubes
- Formed and Straight Air Brake Harness Assemblies

Construction

- Distinctive patented construction (Pat. No. 6,670,004)
- 100% polyamide construction with polyester yarn reinforcement UV Stabilized
- Thermoformable
- Available in standard and custom colors
- Available in all standard sizes

Temperature Range

Synflex® Eclipse™ Air Brake Tubing is designed for a wider operating temperature range than traditional nylon tubing: -65 °F to 200 °F (-54 °C to 93 °C)

Standard Compliance

Meets SAE J844, J1131, J2494-3, and DOT-FMVSS 106

Features / Benefits

• Superior Abrasion Resistance

Synflex Eclipse significantly outperforms rubber and Nylon11. As a result, Synflex Eclipse tubing has a longer service life in the harshest environments.

• Ease of Cutting


The unique construction of Synflex Eclipse tubing promotes burr free cuts, which yields improved assemblies with either push-to-connect or compression fittings.

• Enhanced Flexibility and Extension

Synflex Eclipse tubing has improved flexibility over other nylon tubing. This translates into easier installation and handling at low temperatures.

• Flow Performance

With improved flow performance over traditional rubber and nylon, Synflex Eclipse Air Brake Tubing enhances brake timing performance.

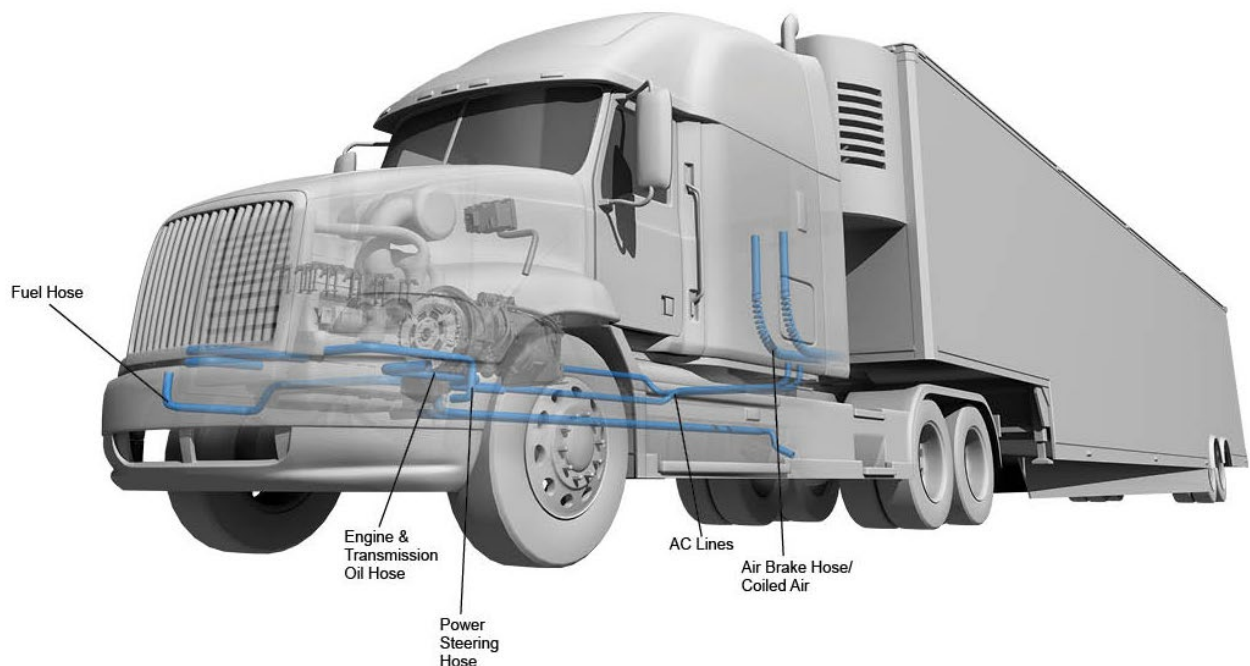


Synflex Eclipse Air Brake Tubing

Performance Comparison Data

Abrasion Resistance Test Results -

Synflex Eclipse significantly outperforms rubber and Nylon11

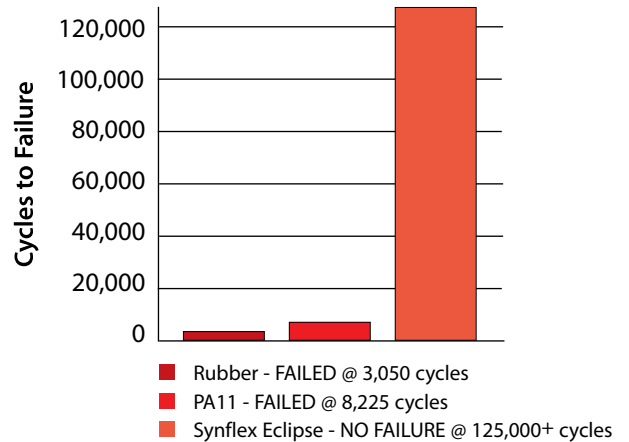

Product Specifications

Synflex Eclipse Type A Air Brake Tubing

Synflex Eclipse by Danfoss 4245

Part Number	Nominal O.D.		Nominal I.D.		Min. Bend Radius		Nominal Wall Thickness		Min. Burst Pressure		Weight	
	mm	in	mm	in	mm	in	mm	in	kpa	psi	KG	LBS
											100m	100ft
4245-022	3.18	1/8	2.01	0.079	6.35	1/4	0.58	0.023	6,900	1,000	0.49	0.33
4245-025	3.96	5/32	2.34	0.092	12.70	1/2	0.79	0.031	8,300	1,200	0.83	0.56
4245-033	4.77	3/16	2.97	0.117	19.05	3/4	0.89	0.035	8,300	1,200	1.06	0.71
4245-041	6.35	1/4	4.32	0.170	25.40	1	1.02	0.040	8,300	1,200	1.77	1.19
4245-052	7.95	5/16	5.89	0.232	28.58	1-1/8	1.02	0.040	6,900	1,000	2.29	1.54

Synflex Eclipse Type B Air Brake Tubing

Synflex Eclipse by Danfoss 3270

Part Number	Nominal O.D.		Nominal I.D.		Min. Bend Radius		Nominal Wall Thickness		Min. Burst Pressure		Weight	
	mm	in	mm	in	mm	in	mm	in	kpa	psi	KG	LBS
											100m	100ft
3270-06	9.53	3/8	6.38	0.251	38.10	1.5	1.57	0.062	9,700	1,400	4.20	2.80
3270-08	12.70	1/2	9.55	0.376	50.80	2.0	1.57	0.062	6,600	950	5.80	3.80
3270-10	15.88	5/8	11.20	0.441	63.50	2.5	2.34	0.092	6,200	900	10.40	7.00
3270-12	19.05	3/4	14.38	0.566	76.20	3.0	2.34	0.092	5,500	800	12.80	8.60



Synflex Eclipse

by Danfoss

Danfoss Power Solutions, Nordborgvej 81, 6430 Nordborg, Denmark, Tel. +45 74 88 22 22, Fax +45 74 65 25 80
www.danfoss.com, E-mail: info@danfoss.com

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.