

Technical Information

# PLUS+1®

## CS10 Wireless Gateway



## Revision history

*Table of revisions*

Date	Changed	Rev
September 2023	Updated IMDA compliance	0201
November 2020	Removed some redundancy	0102
October 2020	First edition	0101

## Contents

### Literature references

Technical Information (TI).....	4
Module product Data Sheet (DS).....	4
API specifications (API).....	4
PLUS+1® GUIDE User Manual.....	4

### Product Conformity

CS10.....	5
IMDA.....	5

### User liability and safety statements

OEM responsibility.....	6
-------------------------	---

### Overview

CS10 Wireless gateway.....	7
Default settings.....	7
Specification WiFi.....	7
Document purpose.....	7
Abbreviations.....	7

### Configuration

Connecting wirelessly to CS10.....	8
Overview.....	8
Station mode.....	9
Access point.....	12
CAN.....	14
M2M.....	15
LEDs.....	16

### Programming

Nonfunctional specifications.....	17
PLUS+1® compliance development.....	17

### Product ratings

Environmental testing criteria.....	18
Power.....	19
Module supply voltage/maximum current ratings.....	19
Modules housing.....	19

### Product installation and start-up

Dimensions.....	20
Connector.....	20
Hot plugging.....	20
Mounting.....	20
Grounding.....	21
Machine wiring guidelines.....	22
Machine welding guidelines.....	22

## Literature references

Literature title	Document type	Literature ID
PLUS+1® CS10 Family Technical Information	User Guide	BC314255793849
PLUS+1® CS10 Data Sheet	Data Sheet	AI314170881786
PLUS+1® GUIDE Software User Manual	Operation Guide	AQ152886483724

[Comprehensive technical literature is online at www.danfoss.com](http://www.danfoss.com)

---

## Technical Information (TI)

A TI is comprehensive information for engineering and service personnel to reference.

## Module product Data Sheet (DS)

A module product DS contains summarized information and parameters that are unique to an individual PLUS+1® module, including:

- Numbers and types of inputs and outputs
- Module connector pin assignments
- Module maximum current capacity
- Module sensor power supply (if present) current capacity
- Module installation drawing
- Module weights
- Product ordering information

## API specifications (API)

Module API specifications contain detailed information about the module BIOS. PLUS+1® BIOS functionality is pin dependent. Pins are defined in module data sheets as C (connector number) p (pin number).

API specifications include:

- Variable name
- Variable data type
- Variable direction (read/write)
- Variable function and scaling

[Module API specifications are the definitive source of information regarding PLUS+1® module pin characteristics.](#)

---

## PLUS+1® GUIDE User Manual

The Operation Manual (OM) details information regarding the PLUS+1® GUIDE tool used in building PLUS+1® applications. This OM covers the following broad topics:

- How to use the PLUS+1® GUIDE graphical application development tool to create machine applications
- How to configure module input and output parameters
- How to download PLUS+1® GUIDE applications to target PLUS+1® hardware modules
- How to upload and download tuning parameters
- How to use the PLUS+1® Service Tool

**Product Conformity**

**CS10**

**IMDA**

<div>Complies with IMDA Standards DB107243</div>	IMDA certification for use of wireless devices in Singapore
--	---

## **User liability and safety statements**

### **OEM responsibility**

The OEM of a machine or vehicle in which Danfoss products are installed has the full responsibility for all consequences that might occur. Danfoss has no responsibility for any consequences, direct or indirect, caused by failures or malfunctions.

- Danfoss has no responsibility for any accidents caused by incorrectly mounted or maintained equipment.
- Danfoss does not assume any responsibility for Danfoss products being incorrectly applied or the system being programmed in a manner that jeopardizes safety.
- All safety critical systems shall include an emergency stop to switch off the main supply voltage for the outputs of the electronic control system. All safety critical components shall be installed in such a way that the main supply voltage can be switched off at any time. The emergency stop must be easily accessible to the operator.

## Overview

### CS10 Wireless gateway

#### **Warning**

This device is not intended for safety-related applications and shall not be used for remote control or critical data communication.

---

The Danfoss PLUS+1® CS10 Wireless Gateway is engineered by security experts and designed for the harsh environments common with Off-Highway equipment. The CS10 is a rugged and secure wireless device for machine monitoring – locally or remotely.

CS10 Gateway enables a CAN system with Bluetooth® connectivity to a smart mobile application for diagnosis and updates. Connect any two CAN systems by adding a second CS10 to support the CAN Bridging functionality. In addition, the CS10 is a wireless replacement for wired connection interfaces like the CG150.

Secure data encryption and a flexible device API further enhance reliability and integration with existing applications.

#### **Default settings**

The device is shipped with standard settings for WiFi. To gain access to the CAN bus, the SSID and password must be changed from default.

---

WiFi works by default as an access point with the SSID being 'DanfossCS10\_MAC address' and the password 'being the device's serial number.

#### **Specification WiFi**

The WiFi functionality offers the possibility to configure and operate wireless networks. There are two operation modes: “Access point” and “Station mode”. In Access point mode other devices connect to the CS10 device; In Station mode the CS10 device is able to connect to a wireless network providing gateway.

## Document purpose

The main purpose of this document is to provide electrical, mechanical, and configuration details of the CS10 Wireless Gateway.

## Abbreviations

<b>SSID</b>	the identifier (name) of a network
<b>IP address</b>	a numerical label assigned to each device connected to a network
<b>DHCP</b>	a network management protocol used on Internet Protocol (IP) networks, whereby a DHCP server dynamically assigns an IP address and other network configuration parameters to each device on the network, so they can communicate with other IP networks
<b>Baudrate</b>	the rate at which information is transferred in a communication channel
<b>M2M</b>	Machine to machine

## Configuration


### Connecting wirelessly to CS10

A connection between the Service Tool hosting device and the CS10 device via WiFi is a precondition. As with the M2M functionality there are two connection options:

1. In the peer to peer mode the CS10 must be configured as an access point. A connection to the CS10 needs to be established using the WiFi menu in the operating system of the Service Tool hosting device.
2. Alternatively, both devices can be connected to the same router.

The Service Tool gateway needs to be changed to "PLUS+1® Interlink" using the menu **Communications > Gateway > PLUS+1 > Interlink > Enable**.

In the list **Devices** double-click the device with the matching device EID. The device EID can be found on the page **M2M**. The CS10 might have another node address if it was connected to another gateway previously. If so, in the menu select **Replace Missing ECU** and former address will be replaced by the current address of the device.

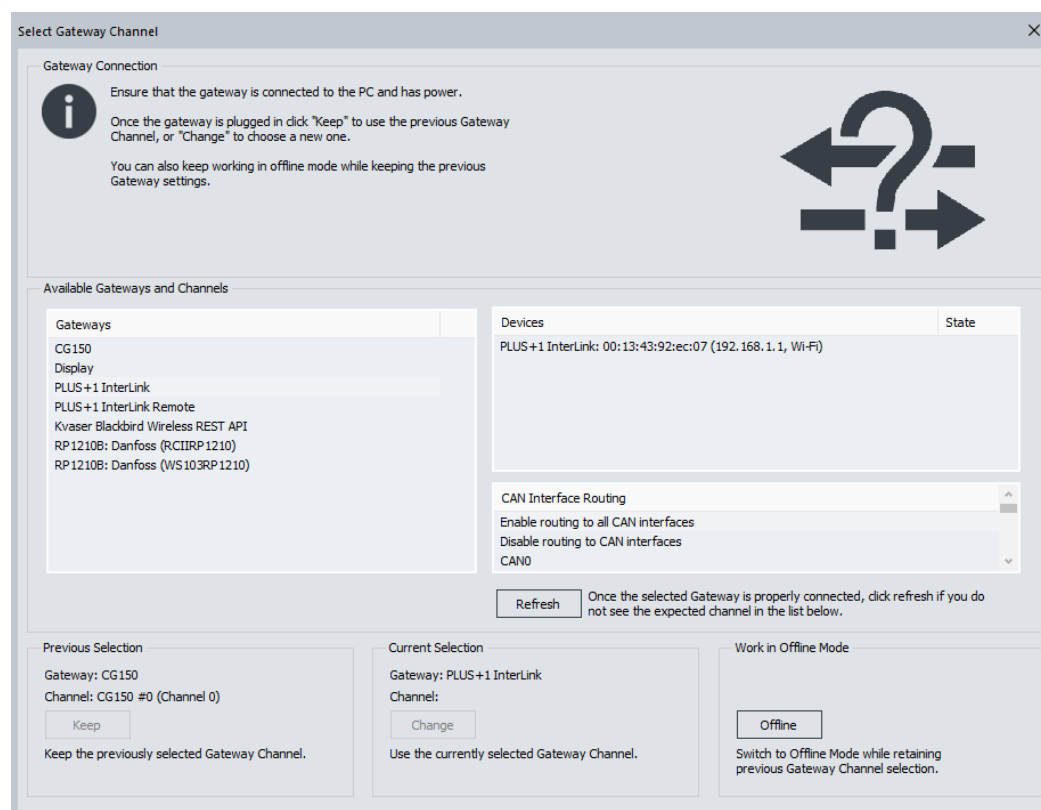

While in an **M2M** bridge, making an Interlink connection will break the **M2M** bridge functionality.

## Overview

The keyswitch shutdown mode reduces the current consumption to a minimum and no functionality is provided. Setting the **Enable** checkbox to true makes the device monitor the C1p05 pin and enter the low power mode as soon as the pin voltage goes to GND. The **Shutdown delay time** parameter provides the time by which entering the low power mode is delayed in seconds.

To have a remote connection to the CS10 via the internet, **Proxy Enable** flag must be set to true. Disabling the option requires a power cycle or **Device Restart**.


The diagnostic address can be configured by applying the appropriate value to the field **Nodeaddress** and pressing the **Save** button. Changing this requires a power cycle or **Device Restart**.



## Configuration

All device settings can be reset to their default values by using the **Reset device** button or by connecting the C1p06 input to supply voltage for at least 10 seconds. Leave this pin open if resetting the device by C1p06 is not intended.

Pressing the **Device Restart** button reboots the application and can be used as an alternative for a power cycle.

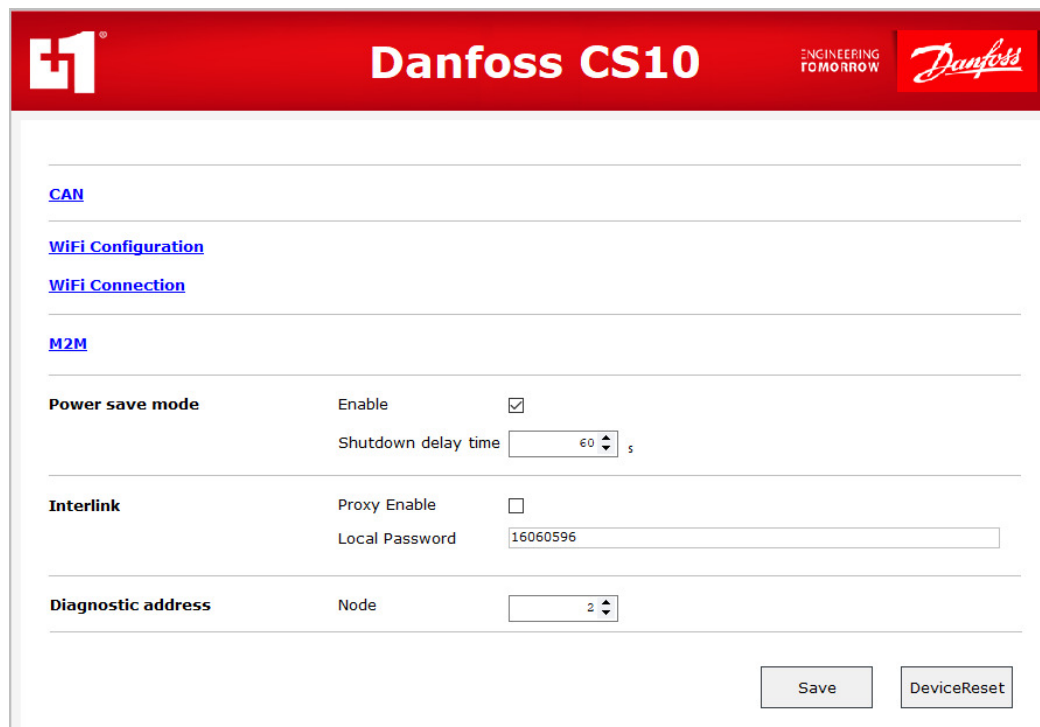

**Danfoss CS10**

[CAN](#)

[WiFi Configuration](#)

[WiFi Connection](#)

[M2M](#)

**Power save mode**

Enable ☒

Shutdown delay time  s

**Interlink**

Proxy Enable ☐

Local Password

**Diagnostic address**

Node

## Station mode


1. Go to the **WiFi Configuration** page and set "Station mode" as **Operation mode**.
2. If **Autoenable** is selected, the selected mode will be enabled once the device is powered.
3. Enter the **SSID** and **Password** of the network to be connected to.
4. If **Autoconnect** is selected, once the device is powered it will automatically try to connect to the configured network.
5. Select the appropriate **Country code**.
6. If DHCP mode is set to "DHCP disabled" adjust the following settings:
  - **IP address** and **Network mask** for the identification of the CS10 device,
  - **Gateway address** and **Gateway metric** for identifying the AP to connect to,
  - **Primary DNS-server IPv4 addr** and **Secondary DNS-server IPv4 addr** must be set to gather the IP address of an URI.

When **DHCP mode** is set to "DHCP enabled" no further settings need to be done.

Using the **Save** button downloads the data to the device. The actual settings are shown in the section **Actual settings**.

Using the **Reset** button applies a default set of standard parameters.

## Configuration

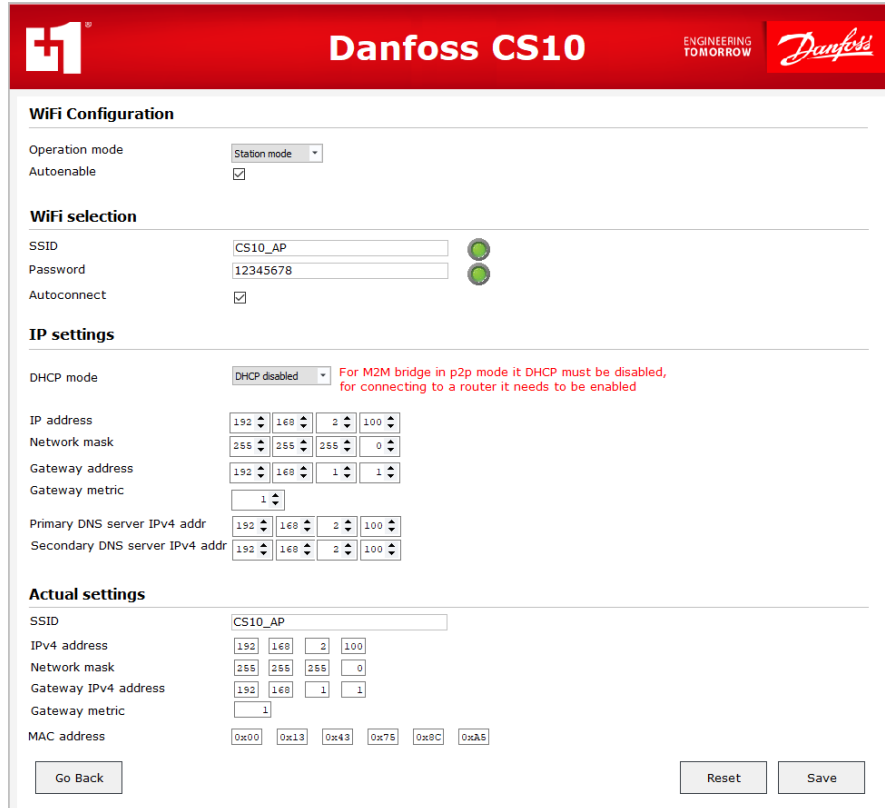

**WiFi Configuration**

Operation mode: Station mode  
Autoenable: ☒

**WiFi selection**

SSID: CS10\_AP  
Password: 12345678  
Autoconnect: ☒

**IP settings**

DHCP mode: DHCP disabled For M2M bridge in p2p mode it DHCP must be disabled, for connecting to a router it needs to be enabled

IP address: 192.168.2.100  
Network mask: 255.255.255.0  
Gateway address: 192.168.1.1  
Gateway metric: 1  
Primary DNS server IPv4 addr: 192.168.2.100  
Secondary DNS server IPv4 addr: 192.168.2.100

**Actual settings**

SSID: CS10\_AP  
IPv4 address: 192.168.2.100  
Network mask: 255.255.255.0  
Gateway IPv4 address: 192.168.1.1  
Gateway metric: 1  
MAC address: 0x00 0x13 0x43 0x78 0x8C 0xA6

Go Back Reset Save

On the **WiFi Connection** page, client status shows the connection status of the CS10 device.

**Enable/Disable** activates/deactivates the WiFi unit of the device, the actual status is indicated by the LED **WiFi enabled**. When using the **Connect** button the device tries to connect to the access point defined in the **WiFi Connection**.

The name of the network client is shown in the field **SSID**. The **Mode** field indicates if the connection has been established. **Link quality** shows the quality of the connection when it's established.

**Connection IPv4** address shows the assigned network address.

The section **AP list** shows the networks available. Using the **Scan** button starts a scan for available networks.

The number of available networks is shown in the field **Number of access points**, the first element to be shown in the list can be selected with the **Start index** field.

For each available network the **SSID**, **signal quality**, **signal level** and the **security** type are provided.

## Configuration

Danfoss CS10

ENGINEERING  
TOMORROW

### WiFi Connection

---

#### Client status

WiFi enabled ☒

WiFi initialization error ☒

SSID

Connection IPv4 address

Link quality  0 100 %

Mode connected

Disable
Disconnect

#### AP list

Number of access points

Start index  GoToIndex


	SSID	Quality	Signal level	Security
1	CS10_AP	85	-50 dBm	WPA
2	DIRECT-37-HP OfficeJ	51	-74 dBm	WPA
3	Green Bay Packers	50	-75 dBm	WPA
4	Skol Vikings	65	-64 dBm	WPA
5	Skol Vikings-5G	51	-74 dBm	WPA
6	CenturyLink6326	27	-91 dBm	WPA
7	DIRECT-roku-422-DC	65	-64 dBm	WPA
8		0	0 dBm	WPA
9		0	0 dBm	WPA
10		0	0 dBm	WPA
11		0	0 dBm	WPA
12		0	0 dBm	WPA

Scan

Go Back

## Configuration

### Access point

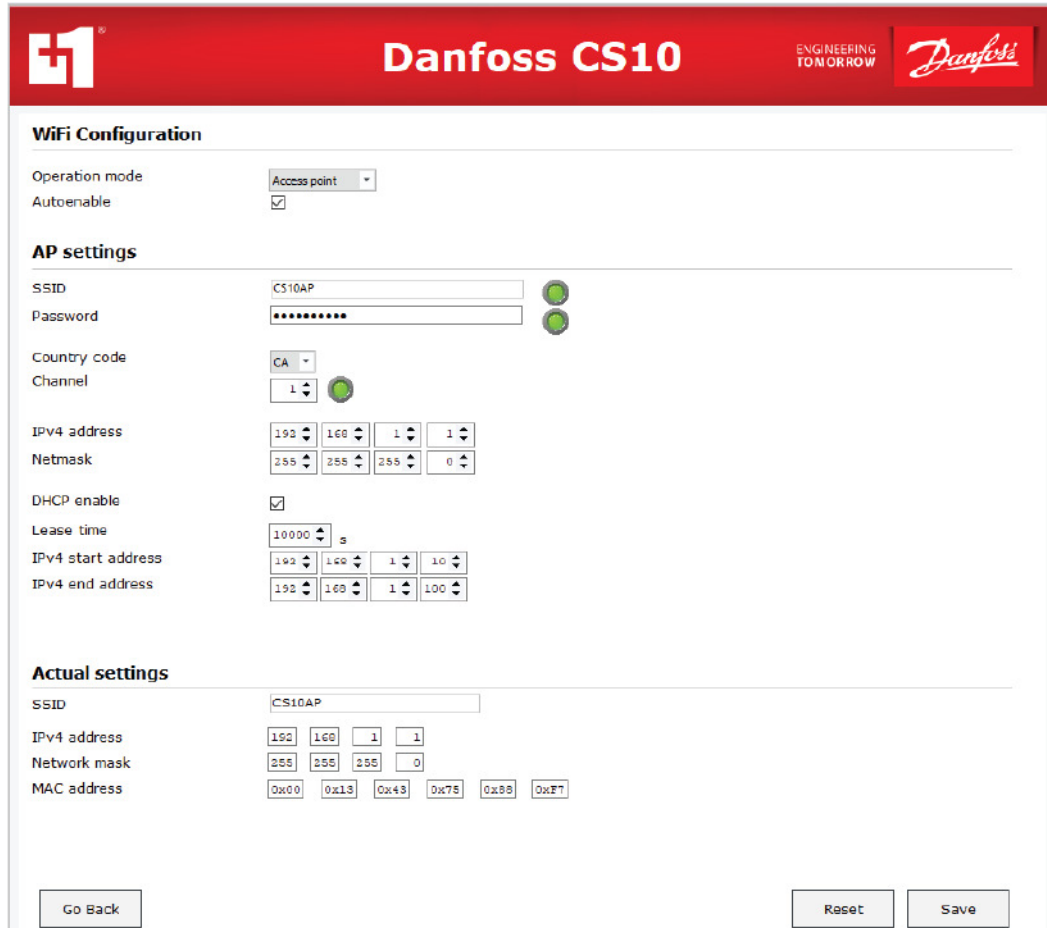

**WiFi Configuration**

Operation mode: Access point  
Autoenable: ☒

**AP settings**

SSID: CS10AP  
Password:   
Country code: CA  
Channel: 1  
IPv4 address: 192.168.1.1  
Netmask: 255.255.255.0  
DHCP enable: ☒  
Lease time: 10000 s  
IPv4 start address: 192.168.1.10  
IPv4 end address: 192.168.1.100

**Actual settings**

SSID: CS10AP  
IPv4 address: 192.168.1.1  
Network mask: 255.255.255.0  
MAC address: 0x00 0x13 0x43 0x75 0x88 0x27

Go Back Reset Save

1. Go to the **WiFi Configuration** page and set "Access point" as **Operation mode**
2. If **Autoenable** is set the automatically enable itself when the device is powered
3. Select SSID and Password for identifying the network
4. Select the appropriate **Channel**
5. Set the address of the access point to be created in in **IPv4 address** and **Netmask**
6. If **DHCP enable** is set all clients that connect as DHCP client automatically retrieve an address from the range defined in the fields **IPv4 start address** and **IPv4 end address** for the time defined in the field **Lease time**
7. Using the **Save** button downloads the data to the device. The actual settings are then shown in the section **Actual settings**

Using the **Reset** button applies a set of default parameter.

## Configuration

**Danfoss CS10**

ENGINEERING  
TONI ORROW

**WiFi Configuration**

Operation mode
Access point

Autoenable
☒

**AP settings**

SSID
CS10AP

Password

Country code
CA

Channel
1

IPv4 address
192 168 1 1

Netmask
255 255 255 0

DHCP enable
☒

Lease time
10000 s

IPv4 start address
192 168 1 10

IPv4 end address
192 168 1 100

**Actual settings**

SSID
CS10AP

IPv4 address
192 168 1 1

Network mask
255 255 255 0

MAC address
0x00 0x13 0x43 0x75 0x8B 0xEF

Go Back
Reset
Save


On the **WiFi Connection** page, the status of the configured access point is shown in the section **AP status**.

**Enable/Disable** activates/deactivates the Access point unit of the device manually, the actual status is indicated by the LED **AP enabled**.

A list of the devices connected to the access point is provided in the section **Connected clients**.

The number of clients is shown in the field **Amount**. In the field **Index** the device at this index in the list is shown when applying the **GoToIndex** button. The MAC address and IPv4 address are then shown in the corresponding fields.

## Configuration



## CAN

The CAN section provides the possibility to setup a set of messages to be received.

The desired baudrate for the CAN unit needs to be set in the field **Baudrate**.

When the baudrate has changed this setting activates after the next power cycle or by using the **DeviceRestart** button on the **Overview** page.

For each signal to be received the **ID**, Indicator for extended ID (**Ext ID**) and **Mask** must be applied. The option **Protect** leaves the latest received message at the output of the corresponding CAN receiver.

Pressing the **Save** button sends the applied configuration to the device.

Using the **Reset** button applies a set of default parameters.

When a corresponding message has been received its parameter appears in the fields **Received ID**, **Length** and **Data**. The LED indicates if the message has been received during the previous second.

## Configuration

# Danfoss CS10

ENGINEERING  
TOMORROW

### CAN

Baudrate: 250 kbd

CAN ID format Hex: ☐

CAN Mask format Hex: ☒

#### CAN receive configuration

Ext ID	ID	Mask	Protect	Received ID	Length	Data	Up to date
<input checked="" type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">333</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input checked="" type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">444</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	
<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0x1FFFFFFF</span>	<input type="checkbox"/>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span>	<span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span> <span style="border: 1px solid #ccc; padding: 2px;">0</span>	

Go Back

Reset
Save

## M2M

The M2M Bridge establishes a connection that transmits CAN messages between CS10 devices using an existing WiFi-connection between them. The two devices can be connected peer to peer where one device is configured as an Access point, and the other one is configured to station mode (DHCP must be disabled). Alternatively, both can be configured to station mode to connect to a router, in this case DHCP needs to be enabled.

For a successful M2M configuration one device needs to be configured as a master, the other one as a slave using the field **Role**.


For the slave only the **Local Password** must be applied which needs to match the **Remote Password** of the master device. Due to its multipurpose meaning the local password can be found on the **Overview** page.

For the master device the following settings must be applied. The operation mode can be set in the field **Remote EID mode**. In auto-mode a connection to the first accessible Interlink-device to be found is established while in manual mode a connection to the device with the Interlink EID to be set in the field **Remote EID** is established. To connect to a device the remote password must be applied in the field **Remote Password** where it must match the local password of the slave device. If the option **Autoenable** is set, the M2M unit is automatically enabled when the device is powered. The set of messages to be transferred to and from the connected device is defined in the sections **Remote/Local filter configuration**. In the dropdown list above there are three options available where "Pass all messages" let's all messages pass through while "Block all messages" let's no message pass through. The option "Define messages" offers the opportunity to explicitly select up to 10 messages to be transmitted. If the set of Filter/Mask is set to 0 for both all messages will pass the bridge. If the set of Filter/Mask is set to 0x80000000 for both the message is blocked. In the **Output filter configuration** section all outgoing messages are defined, while in the **Input filter configuration** section all incoming messages are defined. All these settings get applied to the device when pressing the button **Save**.

## Configuration


The master device automatically starts to establish a connection as soon as it's enabled. The current status of the connection is shown under **Status**.

Using the **Reset** button applies a set of default parameters.




**Danfoss CS10**

ENGINEERING  
TOMORROW



### M2M basic configuration

Enable



For establishing the CAN bridge a connection between both bridge-participants via WiFi or Bluetooth must be existing.

Role

Master

Autoenable

☒

Remote EID mode

Auto

Remote Password

1540200650161

Device EID

0x00

0x40

0x9D

0xA3

0x90

0x02

### Status

Running

### Input filter configuration

This filter defines which messages get transmitted from slave to master.

Pass all messages

### Output filter configuration

This filter defines which messages get transmitted from master to slave.

Define messages

Filter	Mask
0	0x00000000
0	0x00000000
0	0x00000000
0	0x00000000
0	0x00000000
0	0x00000000
0	0x00000000
0	0x00000000
0	0x00000000
0	0x00000000

Note all messages will be passed trough if for one message Filter and Mask are set to 0.  
Applying 0x80000000 to filter and mask blocks the message.

Go Back

Disable

Reset

Save

## LEDs

There are four LEDs on every CS10 module: one blue, one white, one green, and one red. These are under application software control of the primary processor.

16 | © Danfoss | September 2023

BC356772124151en-000201



## Programming

### Nonfunctional specifications


#### **PLUS+1® compliance development**

Applicable company software development standards must be adhered to. At time of initial development Danfoss Power Solutions SW PDP v5.00 (70036901v5.00) is the adopted standard.

## Product ratings

### Environmental testing criteria

#### Specifications

<b>Operating temperature (ambient)</b>	– 30°C to 70°C
<b>Storage temperature</b>	– 40°C to 85°C
<b>IP rating (with mating connector attached)</b>	IP 67  <div>  <b>Caution</b>  With DEUTSCH DTM06-6S or equivalent mating connector attached </div>
<b>Operating input voltage</b>	6 to 36 VDC
<b>Operating input current</b>	100 mA at 24 VDC
<b>Power consumption</b>	2.4 W
<b>Shutdown current</b>	1 mA max at 24 VDC
<b>Vibration</b>	IEC 60068-2-64
<b>EMI/RFI rating</b>	100 V/M
<b>Weight</b>	110 g

#### Chemical environment

Description	Applicable standard	Comment
Chemical resistance	ISO 16750-5	

#### Mechanical environment

Description	Applicable standard	Comment
Vibration	IEC 60068-2-64 test Fh	
Bump	IEC 60068-2-29 test Eb	
Shock	IEC 60068-2-27 Ea	
Free fall	IEC 60068-2-32 Ed	

#### Electrical/electromagnetic

Description	Applicable standard	Comment
EMC emission	ISO 13766	
EMC immunity	ISO 13766	
Electrostatic discharge	EN 61000-4-2, SAE J1113-13	
Auto electrical transients	ISO 7637-2 & -3	
Short circuit protection	504H0027	
Reversed polarity protection Reversed polarity logic power Reversed polarity battery power	504H0027	

## Product ratings

### Power

#### Module supply voltage/maximum current ratings

CS10 modules are designed to operate with a nominal 6 to 36 Vdc power supply.

The modules will survive with full functionality if the supply voltage remains below 36 Vdc.

#### Specifications

Description	Units	Minimum	Maximum	Comment
Allowed voltage at pin	V		36	
Allowed module current	A		0.3	

#### ! Caution

PCB damage may occur.

To prevent damage to the module all module power supply + pins must be connected to the vehicle power supply to support advertised module maximum output current capacity. DO NOT use module power supply + pins to supply power to other modules on a machine.

### Modules housing

CS10 module housing features are ultrasonically welded together with an assembly that is tamper-proof. Once assembled at the factory, the housing cannot be opened for service.

#### ! Caution


Warranty will be voided if device is opened.

Device is not field serviceable. Do not open the device.

**Product installation and start-up**


**Dimensions**

*Mounting dimensions (mm [in]) and pin assignments*

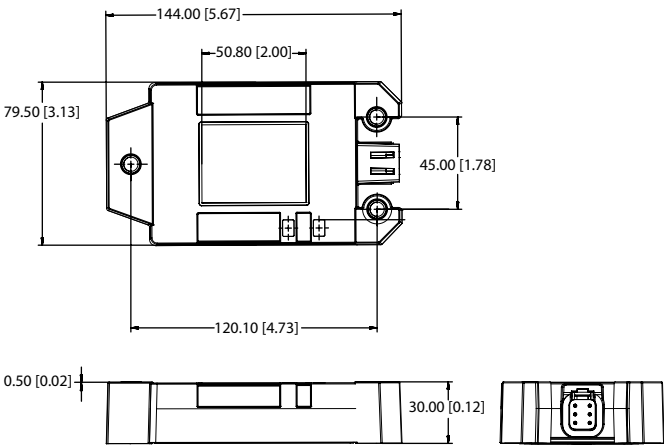

**Connector**

CS10modules use DEUTSCH connectors. The approved mating connector is the DEUTSCH DTM06-6S Plug. Danfoss assembles mating connector kits, referred to as a bag assembly.



*Pin connector*

Pin	Function	Pin	Function
1	GND	4	CAN Low
2	Power	5	Key Switch
3	CAN High	6	CAN Shield / Pairing

**Hot plugging**

Machine power should be off when connecting CS10 modules to mating connectors.

**Mounting**

Care must be taken to insure that the module connector is positioned so that moisture drains away from the connector.

Provide strain relief for mating connector wires.

*Fasteners*

Recommended outer diameter (OD)
M6

**Product installation and start-up****Grounding**

Proper operation of any electronic control system requires that all control modules including displays, microcontrollers and expansion modules be connected to a common ground. A dedicated ground wire of appropriate size connected to the machine battery is recommended.

## Product installation and start-up

### Machine wiring guidelines

- Protect wires from mechanical abuse, run wires in flexible metal or plastic conduits.
- Use 85° C (185° F) wire with abrasion resistant insulation and 105° C (221° F) wire should be considered near hot surfaces.
- Use a wire size that is appropriate for the module connector.
- Separate high current wires such as solenoids, lights, alternators or fuel pumps from sensor and other noise-sensitive input wires.
- Run wires along the inside of, or close to, metal machine surfaces where possible, this simulates a shield which will minimize the effects of EMI/RFI radiation.
- Do not run wires near sharp metal corners, consider running wires through a grommet when rounding a corner.
- Do not run wires near hot machine members.
- Provide strain relief for all wires.
- Avoid running wires near moving or vibrating components.
- Avoid long, unsupported wire spans.
- Ground electronic modules to a dedicated conductor of sufficient size that is connected to the battery (-).
- Power the sensors and valve drive circuits by their dedicated wired power sources and ground returns.
- Twist sensor lines about one turn every 10 cm (4 in).
- Use wire harness anchors that will allow wires to float with respect to the machine rather than rigid anchors.

### Machine welding guidelines

The following is recommended when welding on a machine equipped with electronic components:

- Turn the engine off.
- Remove electronic components from the machine before any arc welding.
- Disconnect the negative battery cable from the battery.
- Do not use electrical components to ground the welder.
- Clamp the ground cable for the welder to the component that will be welded as close as possible to the weld.

**Products we offer:**

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

**Danfoss Power Solutions** is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

**Go to [www.danfoss.com](http://www.danfoss.com) for further product information.**

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Hydro-Gear**

[www.hydro-gear.com](http://www.hydro-gear.com)

**Daikin-Sauer-Danfoss**

[www.daikin-sauer-danfoss.com](http://www.daikin-sauer-danfoss.com)

**Danfoss  
Power Solutions (US) Company**  
2800 East 13th Street  
Ames, IA 50010, USA  
Phone: +1 515 239 6000

**Danfoss  
Power Solutions GmbH & Co. OHG**  
Krokamp 35  
D-24539 Neumünster, Germany  
Phone: +49 4321 871 0

**Danfoss  
Power Solutions ApS**  
Nordborgvej 81  
DK-6430 Nordborg, Denmark  
Phone: +45 7488 2222

**Danfoss  
Power Solutions Trading  
(Shanghai) Co., Ltd.**  
Building #22, No. 1000 Jin Hai Rd  
Jin Qiao, Pudong New District  
Shanghai, China 201206  
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.