

Data sheet

Exhaust gas temperature sensor

MBT 5111



The MBT 5111 is a heavy-duty temperature sensor that can be used for measuring and regulating exhaust gas from diesel engines, turbines and compressors within stationary and marine applications.

This temperature sensor is based on a type K thermo couple, which measures temperatures up to 800 °C. The slim construction gives a short reaction time of $t_{0.5} = 2$ sec. in water.

All parts in contact with the media are made of stainless steel AISI 316 Ti. The sensor is delivered with a 6 m extension cable as standard.

Features

- For measuring exhaust gas in stationary and marine:
 - diesel engines
 - turbines
 - compressors
- With thermocouple for up to 800 °C media temperature
- MBT 5111 with adjustable insertion length up to 150 mm using moveable compression fitting

Approvals

Lloyds Register of Shipping, LR
Germanischer Lloyd, GL
Det Norske Veritas, DNV
Registro Italiano Navale, RINA

Nippon Kaiji Kyokai, NKK
American Bureau of Shipping, ABS
Korean Register of Shipping, KRS
Bureau Veritas, BV
China Classification Society, CCS

Technical data
Main specifications

Sensing element	1 × NiCr-Ni or 2x NiCr-Ni, type K
Measuring range	-40 – 800 °C
Thermocouple design	According to EN 61515
Tolerances	According to EN 60584-1 Class 2
Protection tube	AISI 316 Ti

Response times


Type	Indicative response times	
	Water 0.2 m/s	
	$t_{0.5}$	$t_{0.9}$
MBT 5111 ø6	2 s	5 s
With pocket	12 s	38 s

Mechanical and environmental specifications




Ambient temperature	Depending on cable	
Vibration stability	Shock	100 g/6 ms
	Vibrations	4 g sine function 2 – 100 Hz, measured acc. to IEC 60068-2-6
Cable	MBT 5111 ø6	2 × 0.5 mm ² , armoured teflon (max. 260 °C)
Enclosure	IP65 according to IEC 60529	

Net weight

MBT 5111 ø6	0.16 kg
1 m cable increases net weight with	approx. 40 g

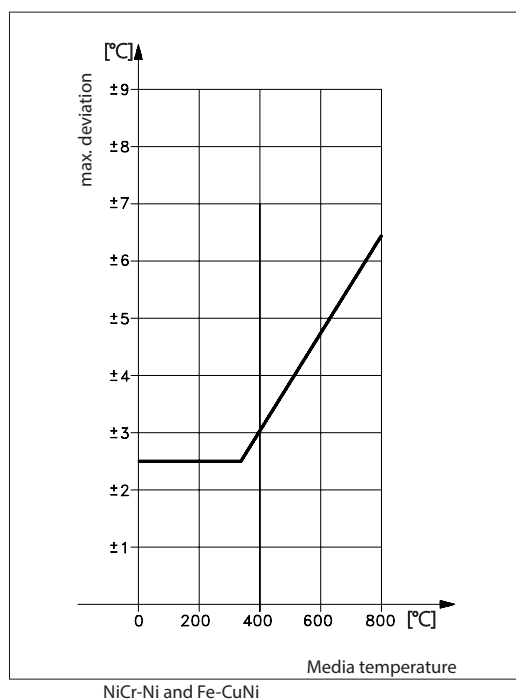Sensor tolerance EN 60584-1 Class 2


Dimensions [mm]

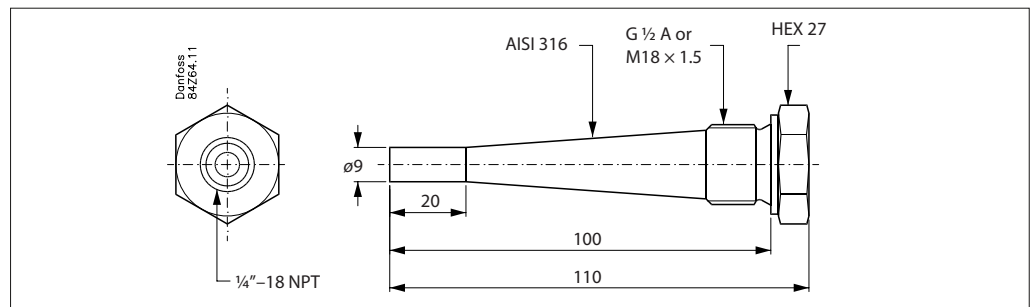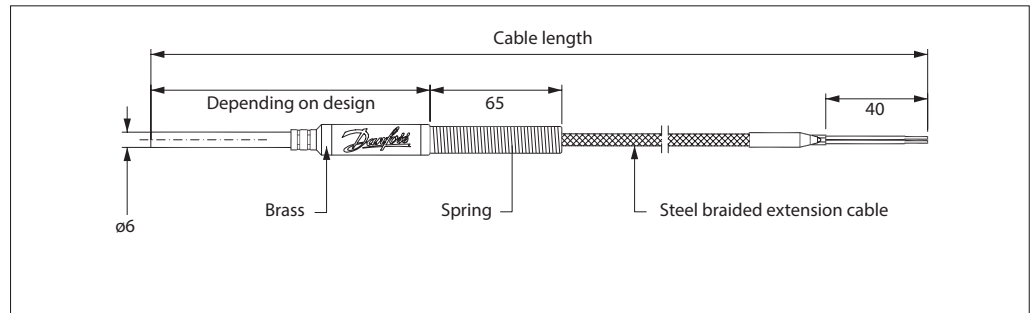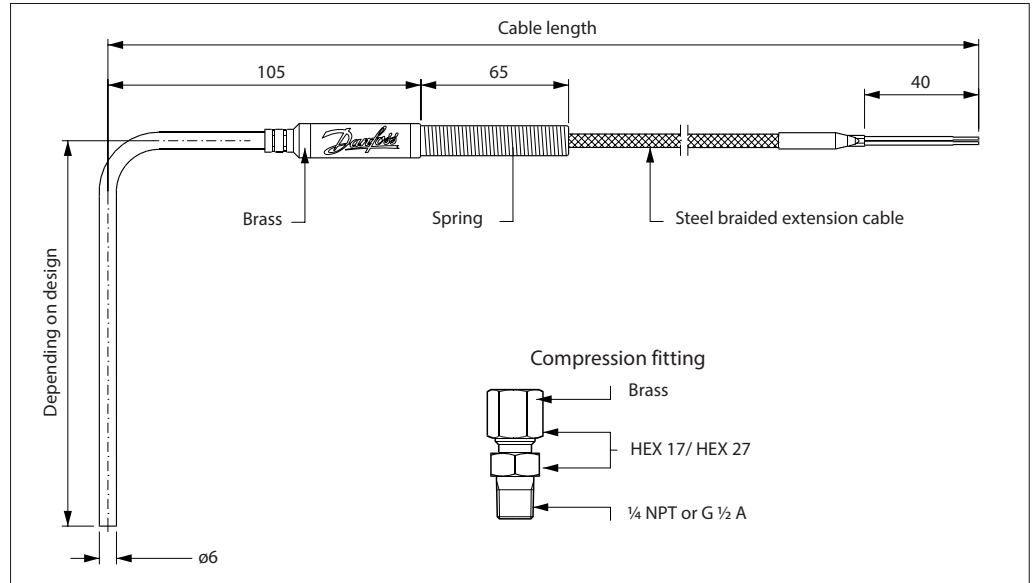

All dimensions are in millimeters