


Data Sheet

# Micro Plate Heat Exchanger Type H30

For more efficient Cooling & Heating systems

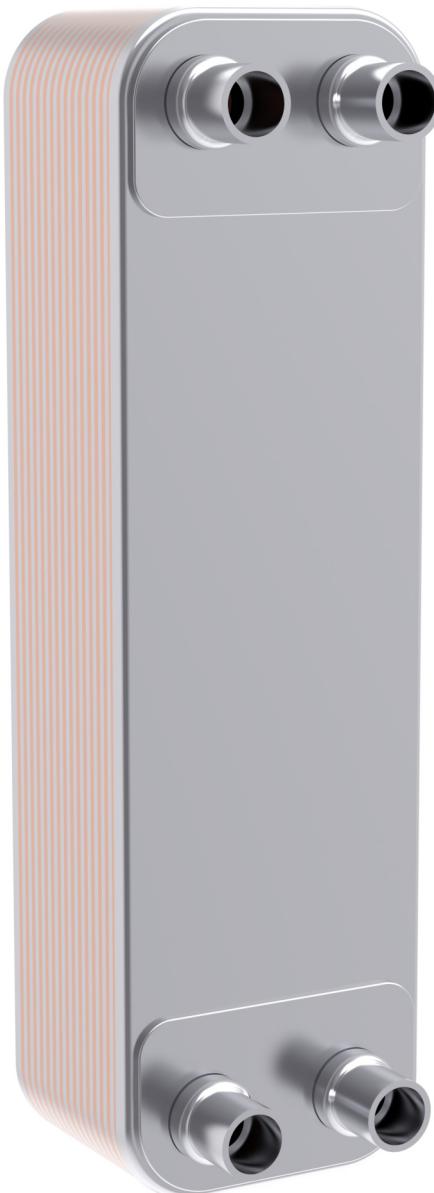

The H30 are condensers optimized for R410A in high efficiency residential heat pumps and semi plug-in systems with capacities between 2-25 kW.

The H30-C is the ideal choice in heat pump designs where space is limited, and high efficiency is required.

The H30-CW is the ideal solution for semi plug-in systems where extremely low hold up volume is required.

The H30 family are designed to work efficiently with close temperature approaches to meet demands for higher COPs systems. The low hold-up volume reduces the refrigerant charge and offers valuable savings.

**Features:**

- Minimal refrigerant hold-up volume: Less refrigerant charge
- High heat transfer: For a more efficient water loop systems and heat pumps
- Smaller footprint: Enabling more compact heat pumps
- Reduced CO<sub>2</sub> footprint: Environmentally friendly with high heat transfer and minimal refrigerant charge

## Portfolio overview

H30L-C: High efficiency condenser optimized for R410A, and other high-density refrigerants

H30-C: High efficiency condenser for medium density refrigerants

H30-CW: High efficiency condenser with extremely low hold up volume

Table 1: Designation



<b>a</b> <b>Applications</b> <b>C</b> : chiller <b>H</b> : heat pump <b>HDW</b> : heat pump double wall	<b>d</b> <b>Specific duty</b> <b>E</b> = evaporator <b>C</b> = condenser <b>Plate design</b> Omit <b>L</b> : L-type <b>M</b> : M-type <b>H</b> : H-type <b>W</b> : W-type <b>X</b> : Asymmetric <b>Z</b> : Z flow	<b>e</b> <b>Distributor version</b> Omit <b>B</b> <b>F</b> ..... <b>Plate stacking sequence</b> Omit: a-b-a... <b>R</b> : b-a-b...
<b>b</b> <b>Platform*</b> 22,30,55,62,118... *heat exchanging surface per plate 1/1000 m <sup>2</sup>	<b>Configuration</b> Omit: single <b>D</b> : Dual circuit <b>U</b> : Mixing chamber	<b>f</b> <b>Number of plates**</b> **Rule: -Single: even number -Dual: even number not multiple of 4

## Application

The H30 is a family of condensers applicable in different application like heat pump and semi plug-in systems. The H30 can operate also in evaporating mode and or de-frost mode, so it can be applicable in Air to water heat pump. Having an extremely low hold up volume, the H30 is the ideal solution for system operating with flammable gasses like propane.

## Media

### **Refrigerants**


R410A, R452B, R454B, R32, R407C, R290

For other refrigerants please contact your Danfoss Sales representative.

## Product specification

### Dimensions

Figure 1: Dimensions

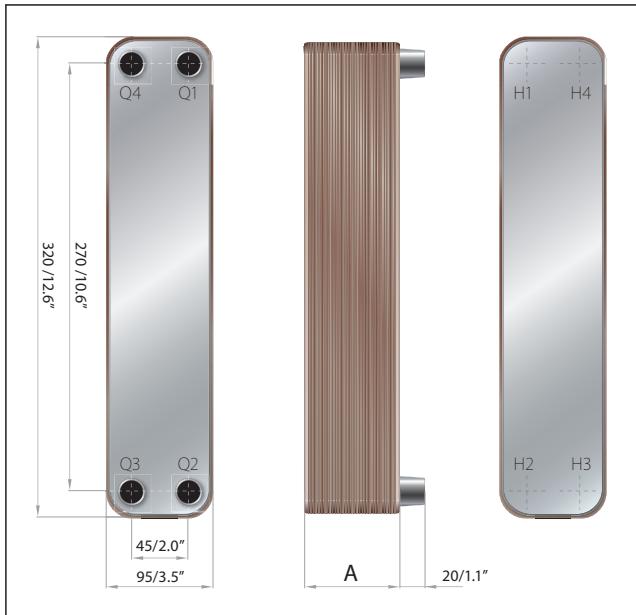

A:

H30L-C:  $8 + 1.24 \times N$  [0.31+0.05 x N]  
H30-C:  $6 + 1.24 \times N$  [0.24 + 0.064 x N]

H30-CW:  $6 + 1.24 \times N$  [0.24 + 0.05 x N]  
N: Number of Plate

### Operating conditions

#### Preconditions:

N = number of plates

Max number of plates: 150

#### Pressure and temperature data:

Min. working temperature: -196 °C (-320 °F)  
Max. working temperature: 200 °C (390 °F)

#### Max. working pressure:

H30L-C: 48 bar (696psi)

H30-C: 30 bar (435psi)

H30-CW: 30 bar (435psi)

#### Weight\*

**H30L-C:**  $0.89 + 0.073 \times N$  [kg] /  $1.96 + 0.16 \times N$  [lb]

**H30-C:**  $0.66 + 0.073 \times N$  [kg] /  $1.46 + 0.16 \times N$  [lb]

**H30-CW:**  $0.66 + 0.073 \times N$  [kg] /  $1.46 + 0.16 \times N$  [lb]

N: Number of Plate

\*Excluding connections and accessories.


## Material specification

Table 2: Standard materials

Item	Material	Specification
Cover plates	Stainless steel	AISI 304L
Plates	Stainless steel	AISI 316L
Connections	Stainless steel	AISI 304L
Brazing filler	Pure copper	Cu

Other material combinations are available on request. Please contact your Danfoss sales representative for more information.

## Configuration flow

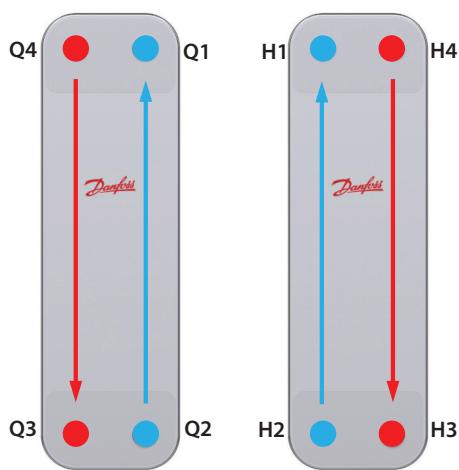

Parallel flow:

Q1 - Q2 [H1 - H2]: brine/secondary side  
 Q3 - Q4 [H3 - H4]: refrigerant/primary side

## Hold up volume

### **H30(L)-C:**

Q1-Q2:  $0.027 \times N/2$  [l]  
 Q3-Q4:  $0.027 \times (N-2)/2$  [l]

### **H30-CW:**

Q1-Q2:  $0.018 \times N/2$  [l]  
 Q3-Q4:  $0.018 \times (N-2)/2$  [l]  
 N: Number of Plate

## Ordering

Global or local standard code numbers can be accessed via [Store.Danfoss.com](http://Store.Danfoss.com) on local subsites, with full set of technical data as well as relevant assets such as documentation and drawings. Since the portfolio may contain different types depending on country, this document contains only a summarized list of standard code numbers with a few data relevant for the product selection.

## Configuring and calculating products

The H30(L)-C and H30-CW can be easily customized based on the application needs; model size can be evaluated using Hexact software.

For details, product configuration and code creation please contact your Danfoss Sales representative.

## Mechanical connections

Circuits	Connection type options	Connection size option [in.]
Q1 - Q2 (water-brine side)	BSP Gas male	3/4, 1
	BSP Gas female	1/2
	DIN R male	3/4, 1
Q3 - Q4 (Refrigerant side)	NPT	3/4, 1
	Soldering	1/4, 3/8, 1/2, 5/8, 3/4, 7/8, 5/16

## Accessories and spare parts

MPHE products are not serviceable, i.e. cannot be taken apart and repaired, and there are no spare parts program. As for accessories, stud bolts, feet on front and/or back cover plates for mounting support and handling are available upon request.

Table 3: Stud bolts

Stud bolt position	Bolt sizes
120mm, middle	M8x20mm
160mm, middle	M8x25mm M8x30mm

Contact your Danfoss sales representative for further information.

## Certificates, declarations, and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

Some approvals may change over time. You can check the most current status at [danfoss.com](http://danfoss.com) or contact your local Danfoss representative if you have any questions.

### **Third party approvals**

All MPHE and BPHE are certified to European Pressure Equipment Directive (PED) and are approved by Underwriters Laboratories (UL).

Other certifications are available upon request: Kraia, EAC, UA, AS; for others and more details please contact your local Danfoss representative.

## Online support

Danfoss offers a wide range of support along with our products, including digital product information, software, mobile apps, and expert guidance. See the possibilities below.

### The Danfoss Product Store



The Danfoss Product Store is your one-stop shop for everything product related—no matter where you are in the world or what area of the cooling industry you work in. Get quick access to essential information like product specs, code numbers, technical documentation, certifications, accessories, and more.

Start browsing at [store.danfoss.com](http://store.danfoss.com).

### Find technical documentation



Find the technical documentation you need to get your project up and running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more.

Start searching now at [www.danfoss.com/en/service-and-support/documentation](http://www.danfoss.com/en/service-and-support/documentation).

### Danfoss Learning



Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications, industry topics, and trends that will help you do your job better.

Create your Danfoss Learning account for free at [www.danfoss.com/en/service-and-support/learning](http://www.danfoss.com/en/service-and-support/learning).

### Get local information and support



Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert—all in your own language.

Find your local Danfoss website here: [www.danfoss.com/en/choose-region](http://www.danfoss.com/en/choose-region).

### Coolselector®2 - find the best components for your HVAC/R system



Coolselector®2 makes it easy for engineers, consultants, and designers to find and order the best components for refrigeration and air conditioning systems. Run calculations based on your operating conditions and then choose the best setup for your system design.

Download Coolselector®2 for free at [coolselector.danfoss.com](http://coolselector.danfoss.com).

### Hexselector for heat exchangers



Hexselector for heat exchangers helps you identify the best heat exchanger for your chiller, heat pump, or other application based on operating conditions. Works for innovative MPHE and traditional BPHE brazed heat exchangers.

Download Hexselector for free at <http://hexselector.com>

### Danfoss A/S

Climate Solutions • [danfoss.com](http://danfoss.com) • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.