



Gland Drain Option

Gland drains are primarily used for long stroke cylinders (over 30 inches) and when extended speed exceeds retract speed. The gland drain is used to return any accumulated fluid, between the rod seal and wiper, to tank. This is used in servo applications, for ultralow leakage requirements, or for remote visual monitoring of rod seal leakage for preventive maintenance purposes.

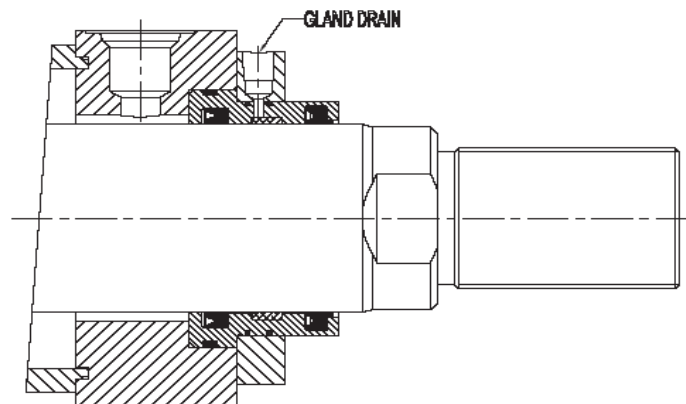

When specifying gland drain position, position location is same as ports. See below



WARNING This product is intended for users having technical expertise. Improper use, selection or application of the cylinders and/or their related accessories can cause or result in Death, Bodily Injury and/or Property Damage. For assistance, please consult an Danfoss representative at 952-937-9800.