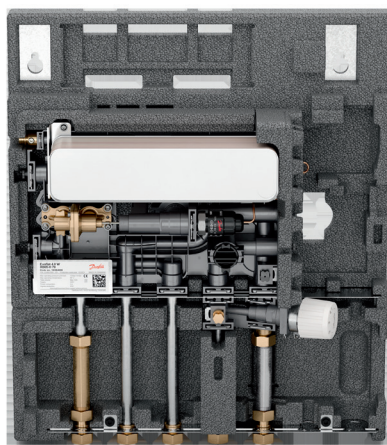


Data Sheet

EvoFlat 4.0 W

Domestic hot water

Description**Product**

Danfoss EvoFlat 4.0 station is particularly suitable for multi family buildings with central heat generation or district heating.

The innovative unit sets new standard. It consists of functional blocks made of a specially reinforced PPS composite material. This makes the station extremely lightweight and limits internal heat emission. The smooth surface reduces the risks of scaling and clogging.

All components are assembled with newly designed click-fit connections. Compared to conventional substations with pipes and screw connections, this new connection technology does not require retightening during installation and commissioning.

Primary side (DH)

The flat station is equipped with two differential pressure controller and a central strainer. A summer bypass keeps the supply line warm during standstill. This ensures a fast response time for DHW during the summer. The bypass is thermostatically controlled.

Domestic hot water (DHW)

Four sizes of heat exchanger are available to cover all requirements from 37 kW up to 70 kW. The EvoFlat 4.0 M is equipped with an intelligent controller that regulates the supply side flow based on the domestic hot water temperature and the volume of water drawn. The station features an integrated differential pressure controller on the supply side of the domestic hot water heating system. This eliminates the need for hydraulic balancing of the station.

If necessary, the station can be expanded with a hot water circulation set.


Features & benefits

- Lightweight
- Easy installation, maintenance and operation
- Durable composite material
- Minimum space required for installation
- Minimal heat loss thanks to EPP insulation cover
- Prepared for build-in heat meter
- Prepared for build-in water meter
- Compatible with various heat sources, such as district heating, heat pumps, biomass etc.

Ordering

Product code numbers standard stations

Flat station	Brazing (HEX) copper	Brazing (HEX) Stainless steel
EvoFlat 4.0 W Type 1	183B3000	183B3500
EvoFlat 4.0 W Type 2	183B3001	183B3501
EvoFlat 4.0 W Type 3	183B3002	183B3502
EvoFlat 4.0 W Type 4	183B3003	183B3503

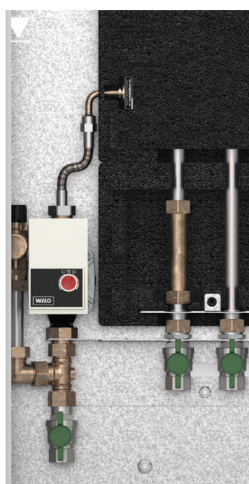

Domestic hot water circulation

If required a set with pump and safety valve (10 bar) can be ordered for easy connection to the flat station. This increases the width of the recess box to at least 690 mm.

Domestic hot water circulation

Code number	
183B0500	Circulation set EvoFlat 4.0
183B0547	Circulation set EvoFlat 4.0 with insulation shell for circulation pump

Accessories



Recess box

Is made of galvanized sheet steel metal, with frame and door powder-coated on both sides in RAL 9016. Appropriate mounting bolts are provided on the rear wall for quick and easy installation of the flat station and distribution unit.

The box is closed all around, open at the bottom, and features mounting feet that are height-adjustable by up to 120 mm.

A mounting rail with seven ball valves (supplied loose) is included.

The box can be mounted in a wall or on a wall.


Recess boxes

Code number		Wide	Height	Depth
183U6028	Recess box w/mounting rail and loose ball valves	610	910	150
183U6029	Recess box w/mounting rail and loose ball valves	690	910	150
183U6033*	Feet set for recess box			
183L5142*	Ball valve set 3/4" 7 connections			

*Spare parts

On wall panels for recess boxes

Code number		Wide	High	Depth
183U6012	On wall panels	610	910	150
183U6014	On wall panels	690	910	150

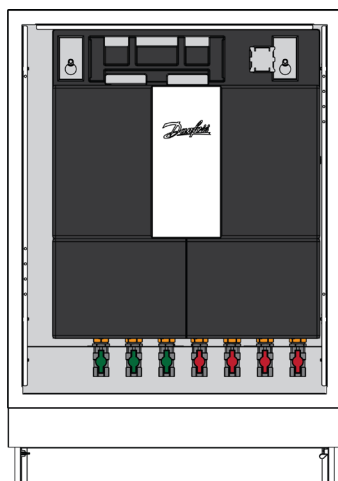

The distribution units fits on the back plate of the recess boxes but can also be mounted on the wall.

Recess boxes for built-in variants are available in two sizes:



Standard station:

Recess box W 610 / H 910 / D 150 mm

Station with DHW circulation

Recess box W 690 / H 910 / D 150 mm

Circuit diagram

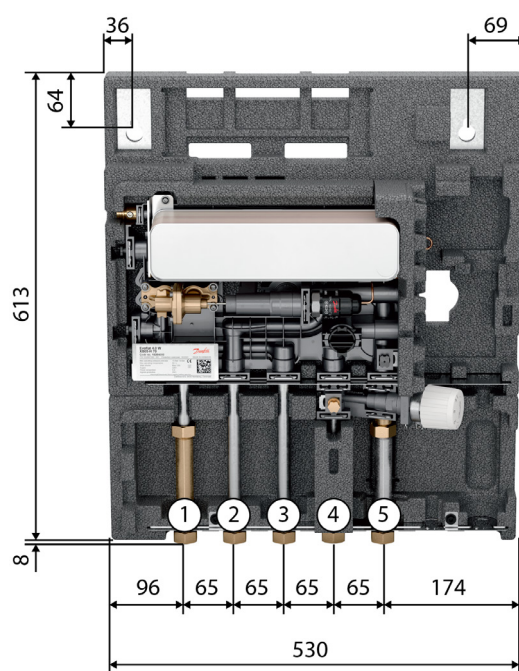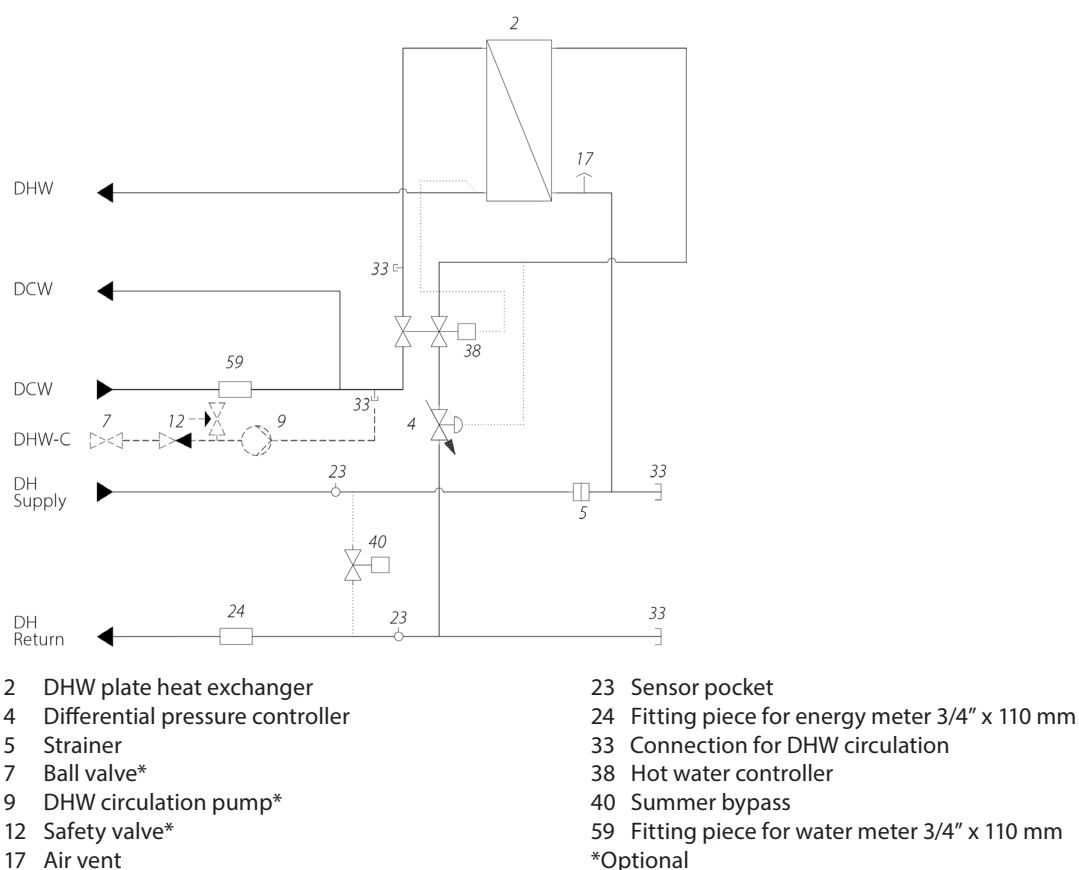

Connections:

- 1 Domestic cold water (DCW) inlet
- 2 Domestic hot water (DHW) supply
- 3 Domestic cold water (DCW) outlet
- 4 Heating source (DH) supply
- 5 Heating source (DH) return

Technical data









Domestic hot water controller	TPC-M
Nominal pressure	PN10
Max. supply temperature (DH)	95 °C
DCW static cold water	P _{min} = 1.5 bar
Brazing (HEX)	Copper or stainless steel
Weight excl. cover	8.7 - 10.4 kg
Insulation	EPP λ 0.039
Electrical supply	230V AC
Connection sizes	G 3/4" internal thread
Pressure nominal primary	10 bar
Pressure nominal secondary	10 bar
Weight without accessories - Type 1 HEX	9.9 kg
Weight without accessories - Type 2 HEX	10.3 kg
Weight without accessories - Type 3 HEX	10.7 kg
Weight without accessories - Type 4 HEX	11.6 kg

DHW capacity examples









Unit type HEX	DHW capacity [kW]	Temperature DHS/DHR [°C]	Flow rate primary [l/h]	Pressure loss Primary* [kPa]	Tap load 50 °C [l/min]
Type 1	37	65/15	637	25	13.3
	43	65/16	750	32	15.4
Type 2	45	65/15	770	29	16.2
	49	65/15	844	35	17.6
Type 3	55	65/15	943	40	19.8
	38	55/19	901	37	13.7
Type 4	60	65/14	1014	41	21.6
	70	65/14	1197	57	25.2
	49	55/19	1158	52	17.6

*Energy meter not included









Flowrate type 1 HEX

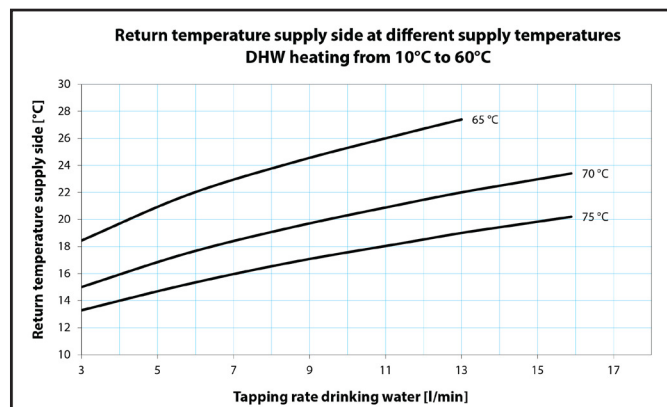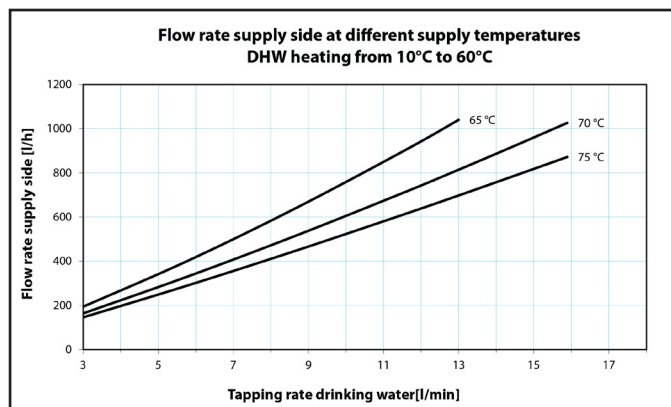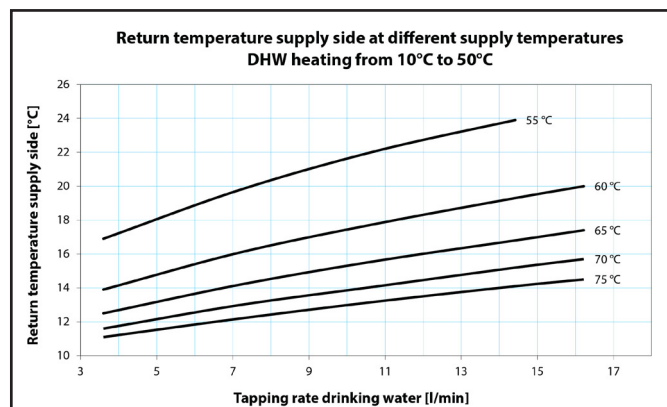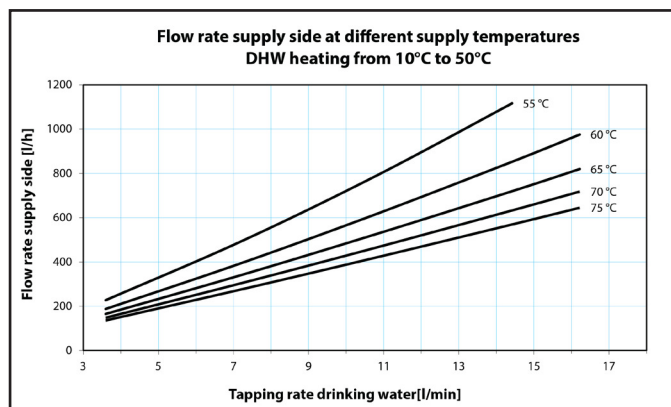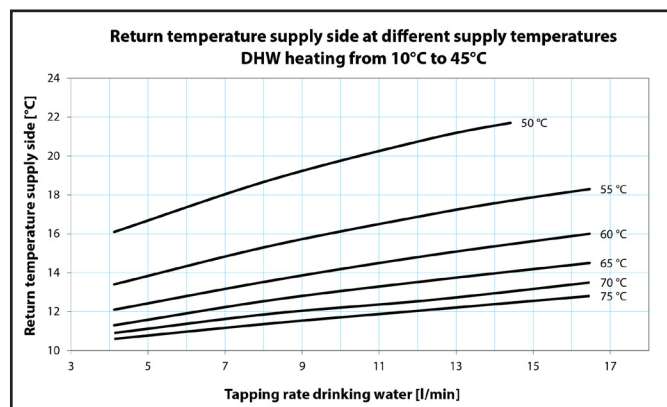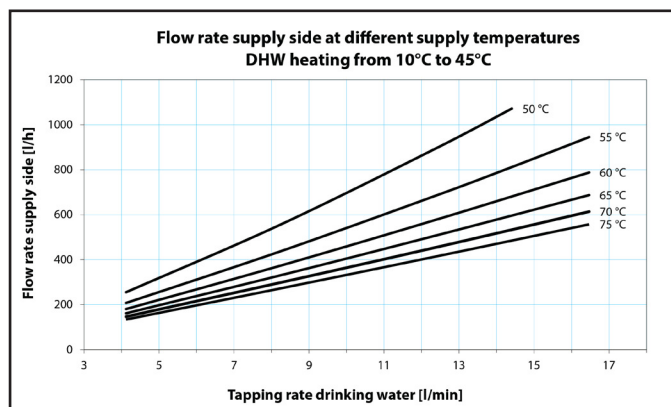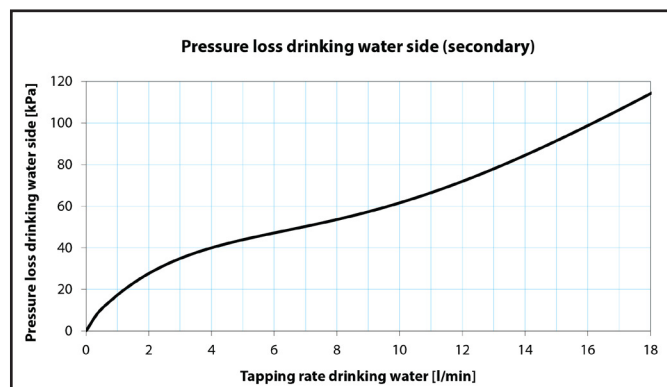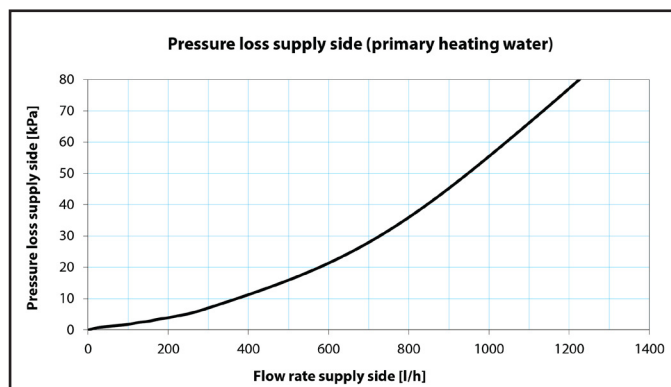









Flowrate type 2 HEX

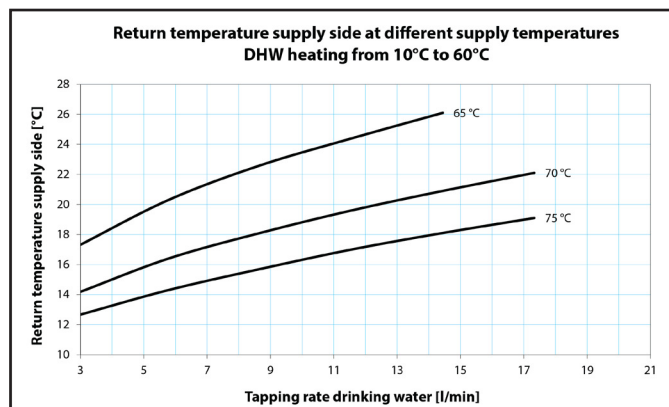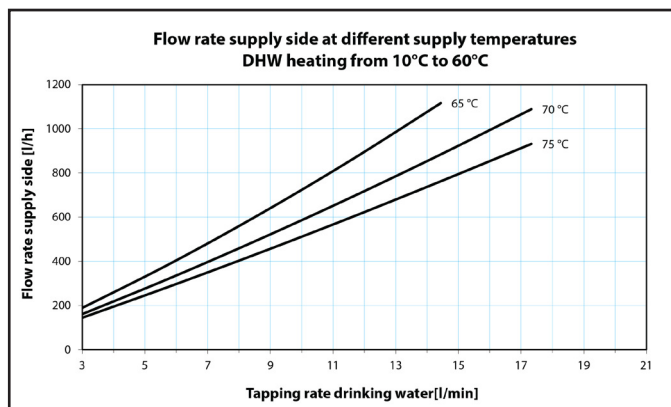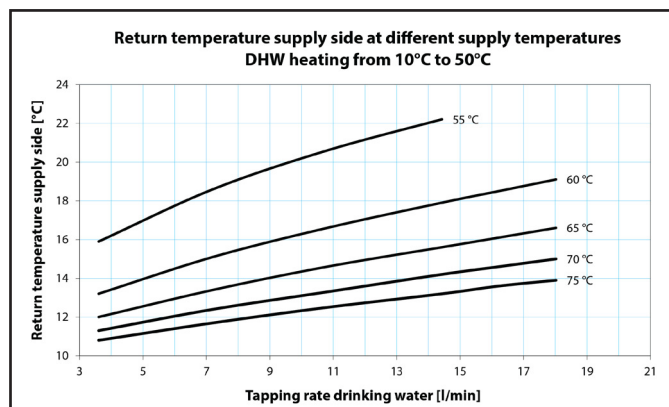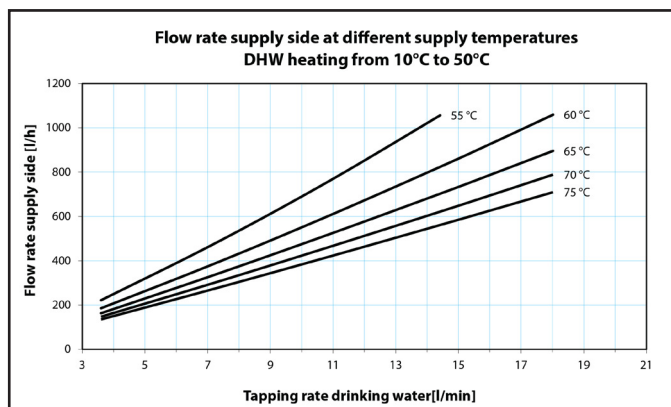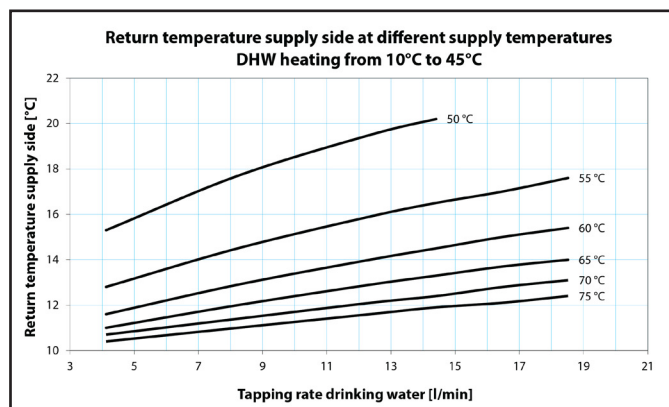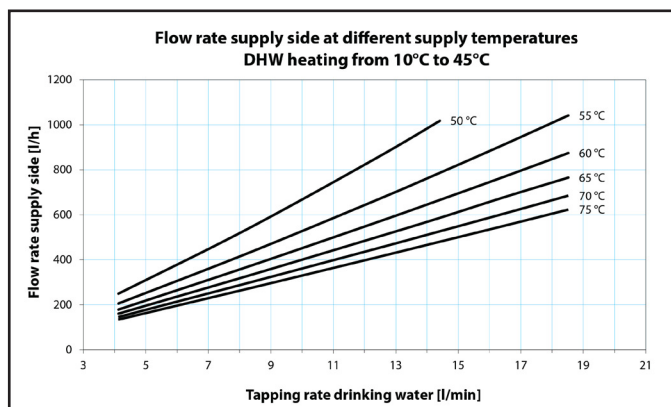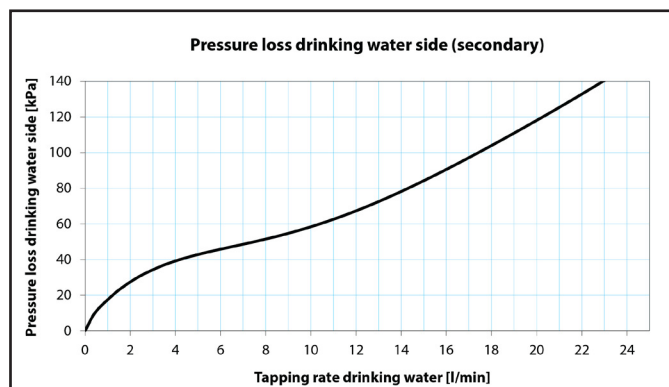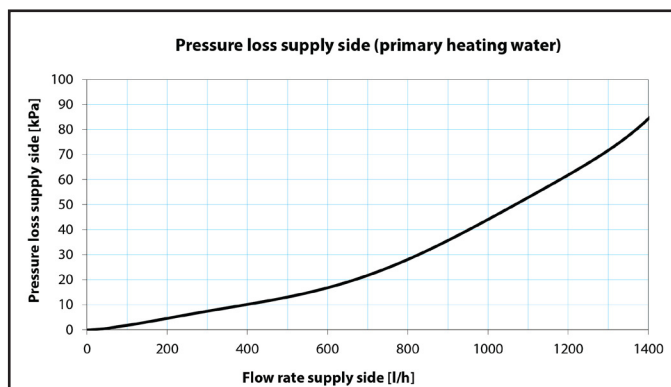


Flowrate type 3 HEX

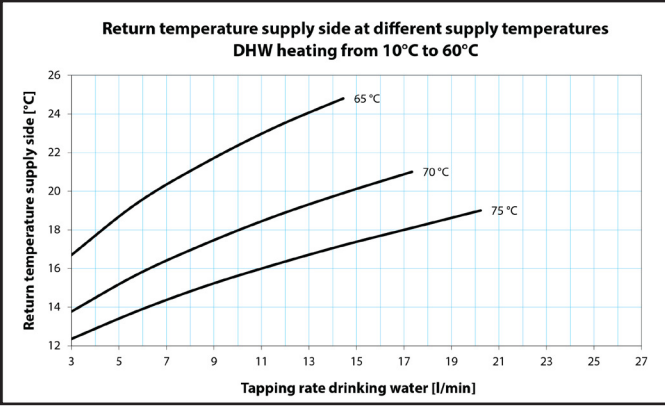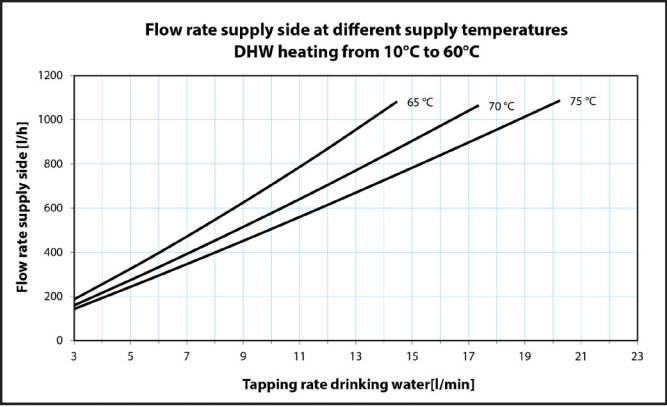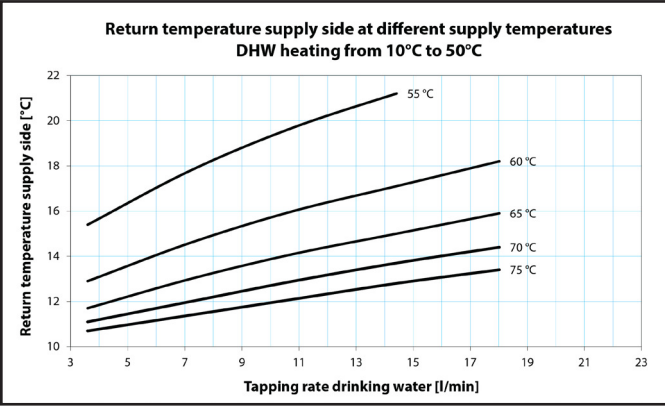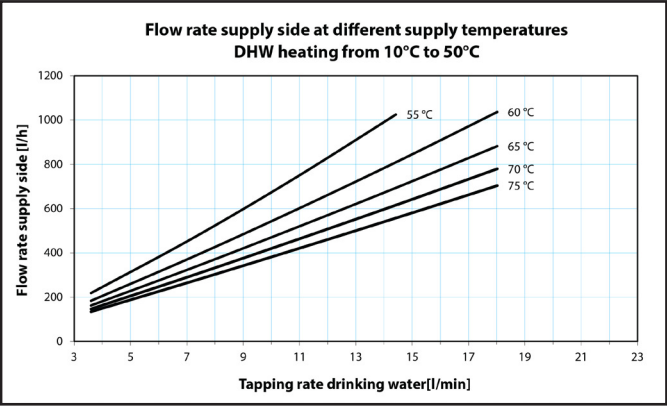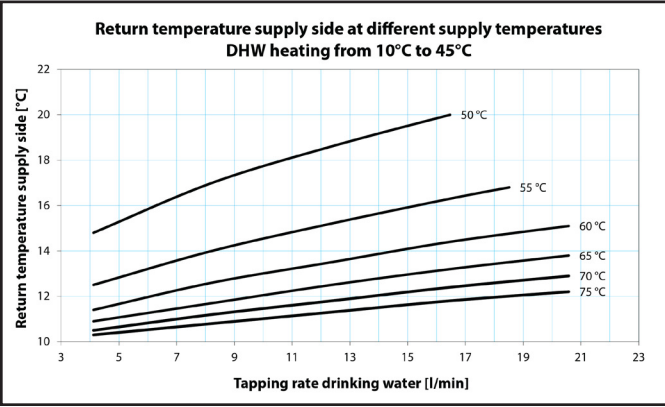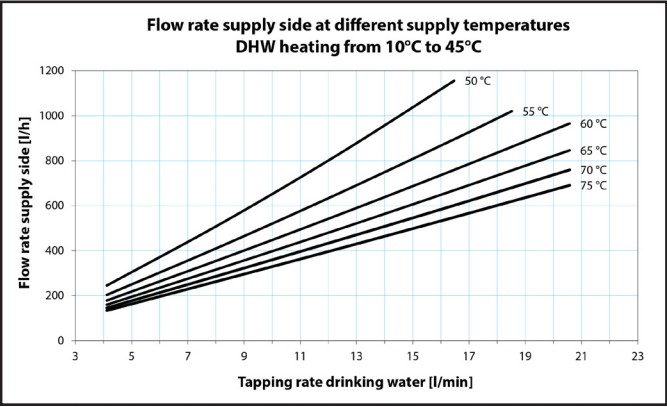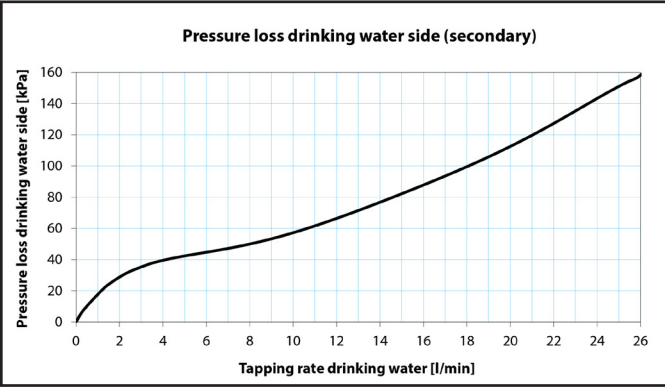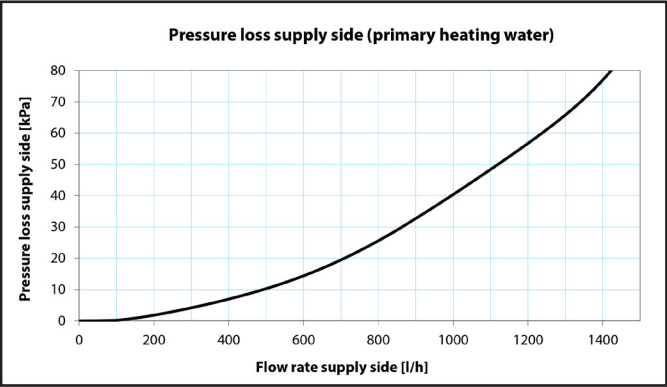

Flowrate type 4 HEX

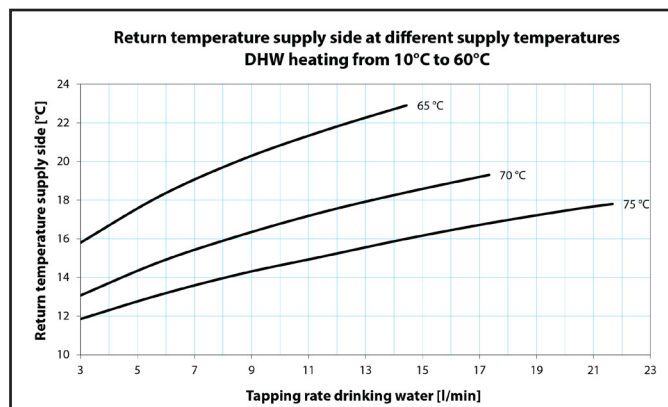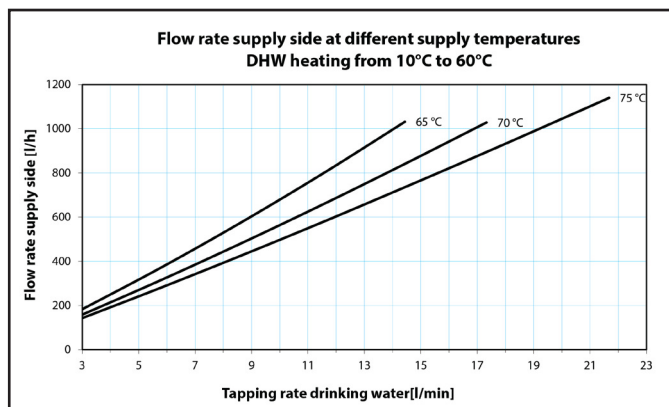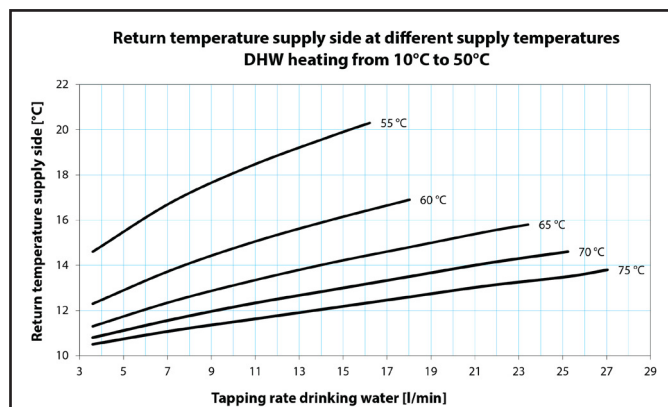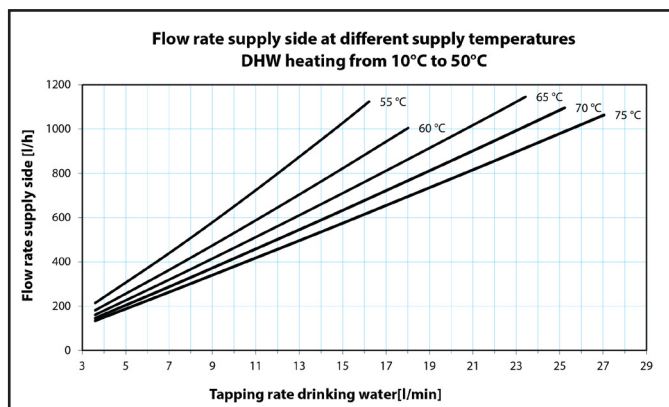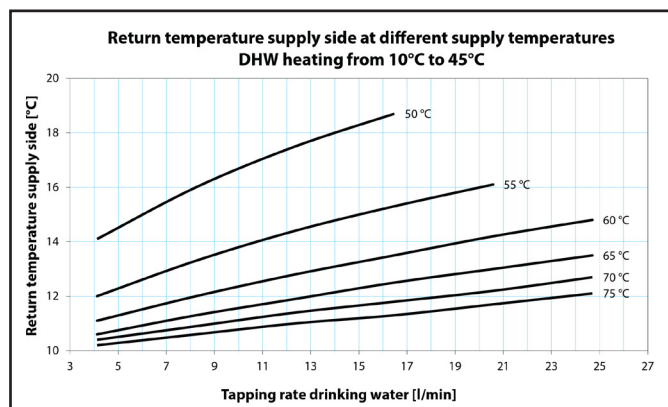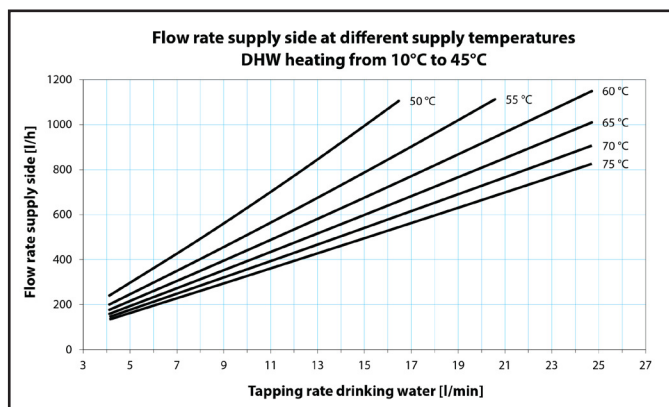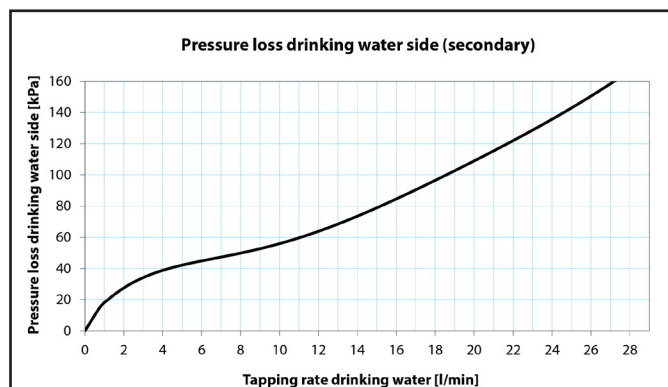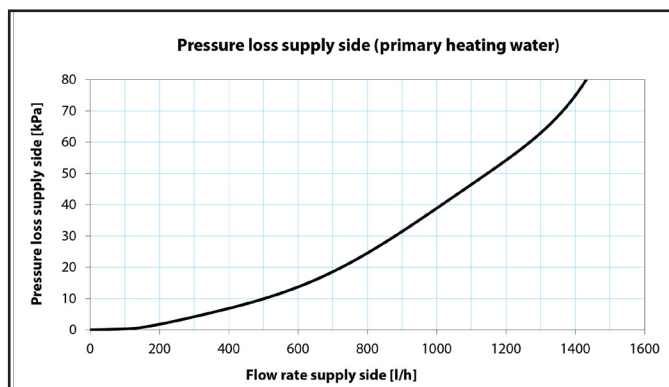

Spare parts

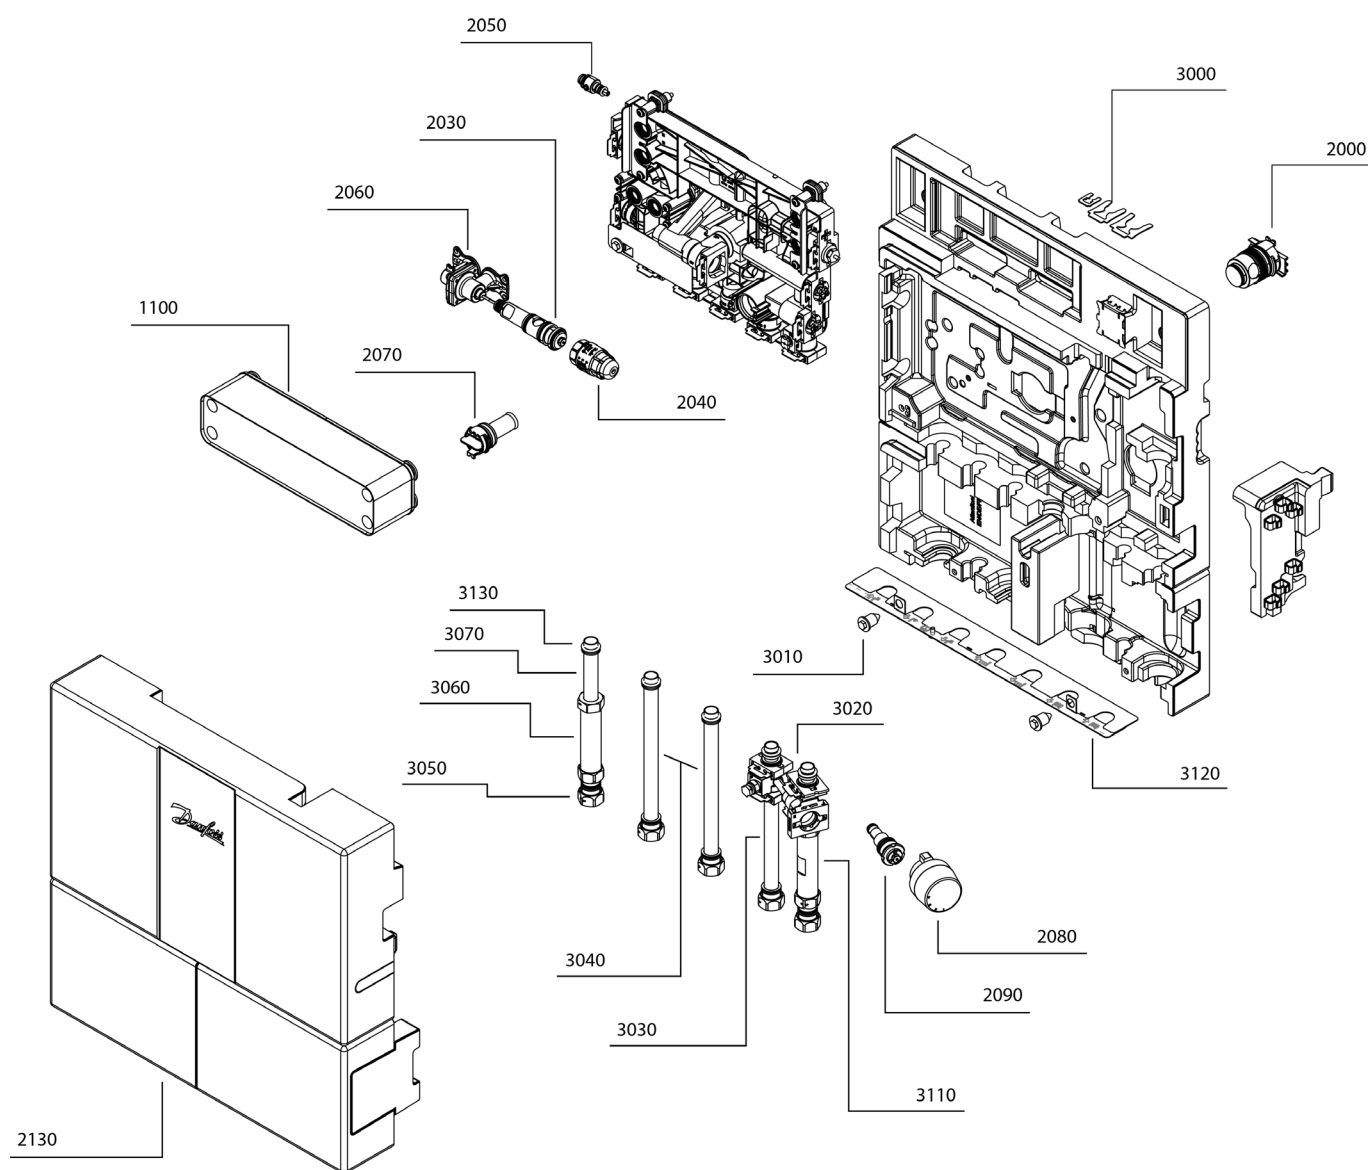

Spare parts

Pos.	Code number	Description
1100	183B0503	Service kit type 1 heat exchanger in copper
1100	183B0504	Service kit type 2 heat exchanger in copper
1100	183B0505	Service kit type 3 heat exchanger in copper
1100	183B0506	Service kit type 4 heat exchanger in copper
1100	183B0507	Service kit type 1 heat exchanger in stainless steel
1100	183B0508	Service kit type 2 heat exchanger in stainless steel
1100	183B0509	Service kit type 3 heat exchanger in stainless steel
1100	183B0510	Service kit type 4 heat exchanger in stainless steel
2000	183B0563	Dp regulator DHW EvoFlat 4.0 SAC
2030	183B0511	DHW control valve set EvoFlat 4.0 SAC
2040	183B0512	DHW control thermostat set EvoFlat 4.0 SAC
2050	183B0513	Air vent set Danfoss EvoFlat 4.0
2060	183B0514	Flow activator with screws and gaskets
2070	183B0515	Strainer set EvoFlat 4.0
2080	183B0516	Bypass valve set manuel EvoFlat 4.0 SAC
2090	183B0517	Bypass valve set thermostatic EvoFlat 4.0 SAC
2130	183B0521	EPP cover set Danfoss EvoFlat 4.0
3000	183B0552	Bracket kit for EvoFlat 4.0
3010	183B0553	Plast screw 15x25
3020	183B0554	Block for bypass EvoFlat 4.0
3030	183B0555	Pipe Ø18 - 171 mm
3040	183B0556	Pipe Ø18 - 223 mm
3050	183B0557	Bushing w/nuts 3/4" x 3/4" x 32 mm
3060	183B0558	Fitting piece 3/4" x 110 mm - DHW
3070	183B0559	Pipe Ø18 - 77 mm
3110	183B0565	Fitting piece 3/4" x 110 mm - HE
3120	183B0566	Mounting rail with symbols for EvoFlat 4.0
3130	183B0560	Clips, O-rings & washers for EvoFlat 4.0
	183B0533	Flushing Tool EvoFlat 4.0 HEX

Guide lines for water quality

Danfoss has prepared this guideline for the water quality of tap water and district heating water used in plate heat exchangers of stainless steel (EN 1.4404 ~ AISI 316L) brazed with pure Copper (Cu), CoResist (Cn) or Stainless Steel (StS). It is important to point out that the water specification is not a guarantee against corrosion, but it must be considered as a tool to avoid the most critical water applications.

Parameter	Unit	Value or concentration	Plate	Brazing material		
			AISI 316L W. Nr. 1.4404	Cu	CoResist	StS
pH		< 0.6	o	-	-	o
		6.0 - 7.5	+	o/-	o	+
		7.5 - 10.5	+	+	+	+
		> 10.5	+	o	o	+
Conductivity	µS/cm	< 10	+	+	+	+
		10 - 500	+	+	+	+
		500 - 1000	+	o	+	+
		> 1000	+	-	o	+
Free Chlorine	mg/l	< 0.5	+	+	+	+
		0.5 - 1	o	+	+	+
		1 - 5	-	o	o	o
		> 5	-	-	-	-
Ammonia (NH ₃ , NH ₄ ⁺)	mg/l	< 2	+	+	+	+
		2 - 20	+	o	o	+
		> 20	+	-	-	+
Alkalinity (HCO ₃ ⁻)	mg/l	< 60	+	+	+	+
		60 - 300	+	+	+	+
		> 300	+	o	+	+
Sulphate (SO ₄ ²⁻)	mg/l	< 100	+	+	+	+
		100 - 300	+	o/-	o	+
		> 300	+	-	-	+
HCO ₃ ⁻ / SO ₄ ²⁻	mg/l	< 1.5	+	+	+	+
		> 1.5	+	o/-	o	+
Nitrate (NO ₃)	mg/l	< 100	+	+	+	+
		> 100	+	o	+	+
Manganese (Mn)	mg/l	< 0.1	+	+	+	+
		> 0.1	+	o	o	+
Iron (Fe)	mg/l	< 0.2	+	+	+	+
		> 0.2	+	o	+	+
* Hardness ratio [Ca ²⁺ , Mg ²⁺]/[HCO ₃ ⁻]		0 - 0.3	+	-	-	+
		0.3 - 0.5	+	o/-	+	+
		> 0.5	+	+	+	+

+	Good corrosion resistance
o	**Corrosion could happen when more parameters are evaluated with o
o/-	Risk of corrosion
-	Use is not recommended

* Hardness ration limits defined per experience and internal tests in Danfoss laboratory

** In case of three or more parameters evaluated with o consultancy is needed with Consultant for Corrosion & Microbiology or BU HHE Representative

Recommended Chloride concentration to avoid Stress Corrosion Cracking (SCC) in the stainless-steel plates:

Application temperature	Chloride concentration
at T ≤ 20°C	max 1000 mg/l
at T ≤ 50°C	max 400 mg/l
at T ≤ 80°C	max 200 mg/l
at T ≥ 100°C	max 100 mg/l

Certificates, declarations and approvals

CE	
EU RoHS	
EPD	

Tender text
Copper HEX**Design**

Danfoss EvoFlat™ flat station for direct heating and hygienic safe hot water provision with a control valve without auxiliary energy in the continuous flow system. Mounted on a heat-insulated base plate including EPP heat insulation hood, for flush or surface mounting.

Domestic hot water (DHW)

Tap water is heated by means of heat exchangers based on the continuous flow principle. The tap water temperature is regulated by the self-acting controller. These controllers ensure outstanding ease of use. The flow-controlled part allows primary and secondary flow through the heat exchanger only during hot water tapping. The flow is blocked immediately after completion of hot water tapping.

The thermostat part in turn regulates the hot water temperature.

Thanks to the fast-acting control valve, limescale deposits and bacteria growth are largely avoided.

The controller in combination with the differential pressure controller ensures a constant DHW temperature even with varying flow temperatures and differential pressures.

The primary line is kept warm by a thermostatically controlled bypass valve (summer bypass).

The flat station is equipped with a connection for domestic hot water circulation. The circulation kit is available as an option.

Supply-side equipment

Temperature and pressure regulators, two differential pressure regulators, zone valve, strainer and ventilation

Mark: Danfoss

Fitting piece for heat meter G $\frac{3}{4}$ "x110mm in return flow, sensor holder as direct immersion sensor M10x1mm

Heat exchanger

Seal less stainless steel plate heat exchanger, copper brazed under vacuum to form a compact unit. New Micro Plate™ heat exchanger technology with unique plate structure for more effective heat transfer, lower pressure losses and longer service life. Corrosion resistant design.

Calculation and materials according to AD data sheets. Manufactured in accordance with DIN ISO 9001, CE tested in accordance with Pressure Equipment Directive 97/23/EC (PED).

Mark: Danfoss

Type: XB05H

Tap-water-side equipment

Fitting piece for cold water meter G $\frac{3}{4}$ "x110mm (CW inlet)

Technical data

Heating

max. capacity [kW]: 17.5
at max. volume flow [m³/h]: 0.5 (supply side) / 1.29 (consumer side)

Tap water heating

max. capacity [kW]: 45 @ VL65°C (Type 1 HEX)
at max. tapping capacity [l/min]: 13.2

max. capacity [kW]: 53 @ VL65°C (Type 2 HEX)
at max. tapping capacity [l/min]: 15.4

max. capacity [kW]: 60 @ VL65°C (Type 3 HEX)
at max. tapping capacity [l/min]: 17.4

max. capacity [kW]: 80 @ VL65°C (Type 4 HEX)
at max. tapping capacity [l/min]: 28.3

Pressure level (tap water side): PN10
Pressure level (supply side): PN10
DH network, max. differential pressure [bar]: 4
CW network, min. static pressure [bar]: 1.5
DH network, max. flow temperature [°C]: 95
Nominal connection size: G³/₄" (union, 7x)
Electrical connection: 230V AC
Dimensions H/W/D [mm]: 613/530/150
Weight [kg]:
7.7 (Type 1 HEX)
8.1 (Type 2 HEX)
8.8 (Type 3 HEX)
9.3 (Type 4 HEX)

Tender text
Stainless steel
HEX**Design**

Danfoss EvoFlat™ flat station for direct heating and hygienic safe hot water provision with a control valve without auxiliary energy in the continuous flow system. Mounted on a heat-insulated base plate including EPP heat insulation hood, for flush or surface mounting.

Domestic hot water (DHW)

Tap water is heated by means of heat exchangers based on the continuous flow principle. The tap water temperature is regulated by the self-acting controller. These controllers ensure outstanding ease of use. The flow-controlled part allows primary and secondary flow through the heat exchanger only during hot water tapping. The flow is blocked immediately after completion of hot water tapping.

The thermostat part in turn regulates the hot water temperature.

Thanks to the fast-acting control valve, limescale deposits and bacteria growth are largely avoided.

The controller in combination with the differential pressure controller ensures a constant DHW temperature even with varying flow temperatures and differential pressures.

The primary line is kept warm by a thermostatically controlled bypass valve (summer bypass).

The flat station is equipped with a connection for domestic hot water circulation. The circulation kit is available as an option.

Supply-side equipment

Temperature and pressure regulators, two differential pressure regulators, zone valve, strainer and ventilation

Mark: Danfoss

Fitting piece for heat meter G $\frac{3}{4}$ "x110mm in return flow, sensor holder as direct immersion sensor M10x1mm

Heat exchanger

Sealless stainless steel plate heat exchanger, brazed with stainless steel braze under vacuum to form a compact unit. New Micro Plate™ heat exchanger technology with unique plate structure for more effective heat transfer, lower pressure losses and longer service life. Corrosion resistant design.

Calculation and materials according to AD data sheets. Manufactured in accordance with DIN ISO 9001, CE tested in accordance with Pressure Equipment Directive 97/23/EC (PED).

Mark: Danfoss

Type: XB05H

Tap-water-side equipment

Fitting piece for cold water meter G $\frac{3}{4}$ "x110mm (CW inlet)

Technical data

Heating

max. capacity [kW]: 17.5
at max. volume flow [m³/h]: 0.5 (supply side) / 1.29 (consumer side)

Tap water heating

max. capacity [kW]: 45 @ VL65°C (Type 1 HEX)
at max. tapping capacity [l/min]: 13.2


max. capacity [kW]: 53 @ VL65°C (Type 2 HEX)
at max. tapping capacity [l/min]: 15.4

max. capacity [kW]: 60 @ VL65°C (Type 3 HEX)
at max. tapping capacity [l/min]: 17.4

max. capacity [kW]: 80 @ VL65°C (Type 4 HEX)
at max. tapping capacity [l/min]: 28.3


Pressure level (tap water side): PN10
Pressure level (supply side): PN10
DH network, max. differential pressure [bar]: 4
CW network, min. static pressure [bar]: 1.5
DH network, max. flow temperature [°C]: 95
Nominal connection size: G³/₄" (union, 7x)
Electrical connection: 230V AC
Dimensions H/W/D [mm]: 613/530/150
Weight [kg]:
7.7 (Type 1 HEX)
8.1 (Type 2 HEX)
8.8 (Type 3 HEX)
9.3 (Type 4 HEX)

Other stations in this portfolio

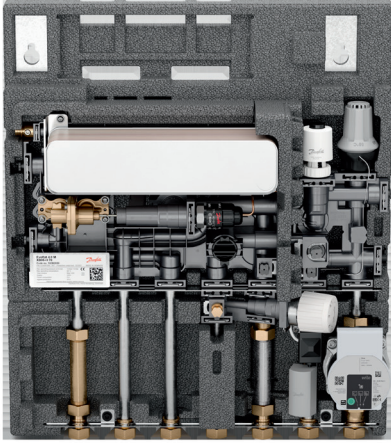


EvoFlat 4.0 M

Flat station for domestic hot water and floor heating.

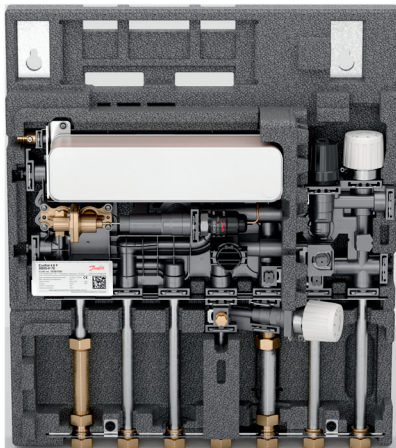

EvoFlat 4.0 F

Flat station for domestic hot water and radiator heating.

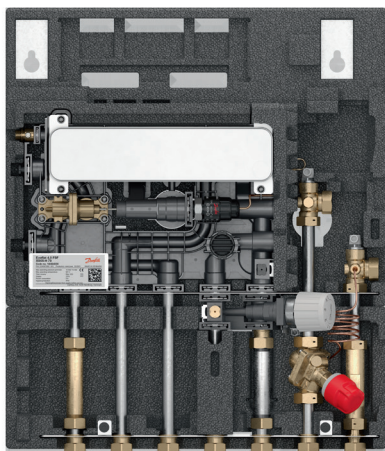

EvoFlat 4.0 Four pipe

Flat station for domestic hot water and floor heating. Especially made for heat pumps.

Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.