



Program. controller, 6 relays

AS-CX06 / AS-UI Snap-on / AS-UI Cover kit / AS-Side / AS-DIN Side

Programmable electronic controller suitable for all HVAC applications needs.

Description

The Alsmart™ universal controller platform is a new portfolio of electronic programmable controllers designed to address the needs of the HVAC market, including heat pumps, chillers, and air conditioning systems.

The new portfolio features a next-generation controller, offering enhanced capabilities and improved performance. In addition, the portfolio includes basic controllers, extension modules, displays, and a complete software toolchain that work seamlessly together to provide a comprehensive solution for HVAC control.

Features & benefits

- Flexible I/O
 - Modular concept (up to 20 Input/Output expansions)
 - Auto-recognition function of the I/O expansions
 - Universal I/Os
 - Stepper driver embedded (Plus versions)
- Higher execution speed and memory
 - Enhanced CPU memory
 - Scalable RAM and ROM
 - Faster cycle time
- Secure and Reliable
 - Isolated power supply and RS485
 - High precision I/Os
 - FailSafe feature for Ethernet connectivity
 - Designed following IEC62443 cybersecurity guidelines
- Enhanced Connectivity
 - 2 Ethernet ports
 - USB-C
 - 2 opto-isolated RS485
 - CAN FD as fieldbus to remote HMI and other AS-CX
- Complete Software Toolchain
 - Alsmart Design for programming and debugging
 - IEC61131-3 compliant
 - Alsmart Service Tool for commissioning/monitoring
- MQTT Cloud connectivity
- Snap-on LCD display

Ordering

Product code numbers

Table: Product part numbers

Description	Code No.	
	Single Pack (connectors kit included)	IPack (27 pieces) (connectors kit NOT included)
AS-CX06 Pro+	080G6000	080G6001
AS-CX06 Pro	080G6002	080G6003
AS-CX06 Mid+	080G6004	080G6005
AS-CX06 Mid+ SSR	080G6038	080G6039
AS-CX06 Mid	080G6006	080G6007
AS-CX06 Mid SSR	080G6040	080G6041
AS-CX06 Lite	080G6008	080G6009

Accessories code numbers



080G6016

Display, AS-UI Snap-on

Function: User Interface, Packing format: Single pack, Quantity per packing format: 1

Related products

080G6000 080G6002 080G6004 080G6006

Overview

Product portfolio

Table: Portfolio overview

	AS-CX06							AS-XP, AS-PS (Expansion modules)			
	AS-CX06 Lite	AS-CX06 Mid	AS-CX06 Mid SSR	AS-CX06 Mid+	AS-CX06 Mid+ SSR	AS-CX06 Pro	AS-CX06 Pro+	AS-XP05	AS-XP05+	AS-XP10	AS-PS20
Digital Outputs	6	6	6	6	6	6	6	5	5	10	
	5xSPST	5xSPST	4xSPST	5xSPST	4xSPST	5xSPST	5xSPST	4xSPST	4xSPST	8xSPST	0
	1xSPDT	1xSPDT	1xSPDT	1xSPDT	1xSPDT	1xSPDT	1xSPDT	1xSPDT	1xSPDT	2xSPDT	
			1xSSR		1xSSR						
Digital Inputs	2	2	2	2	2	2	2	0	0	4	0
	Voltage free	Voltage free	Voltage free	Voltage free	Voltage free	Voltage free	Voltage free			24 VAC or 230 VAC	
Analog Inputs (Universal)	10	10	10	10	10	10	10	10	10	10	14
Analog Outputs	3	3	3	3	3	3	3	2	2	2	0
Power Supply (24 V AC/DC isolated)	Y	Y	Y	Y	Y	Y	Y	from AS-CX	from AS-CX	from AS-CX	Y
Stepper motor (bipolar and unipolar)	0	0	0	1	1	0	1	0	1	0	0
Others											
Snap-on LCD display	Y	Y	Y	Y	Y	Y	Y	-	-	-	-
CAN FD	Remote HMI	AS-CX and Remote HMI	AS-CX and Remote HMI	AS-CX and Remote HMI	AS-CX and Remote HMI	AS-CX and Remote HMI	AS-CX and Remote HMI	-	-	-	-
Number of expansion modules (including AS-PS20)	1	7				20		-	-	-	-
Number of AS-XP05	1 AS-XP05	5 AS-XP05 +1 AS-PS20				16 AS-XP05 + 4 AS-PS20		-	-	-	-

Number of AS-XP10	1 AS-XP10	5 AS-XP10 + 2 AS-PS20					15 AS-XP10 + 5 AS-PS20		-	-	-	-
RTC clock	Y	Y	Y	Y	Y	Y	Y	-	-	-	-	-
RS485 opto-isolated	1	2	2	2	2	2	2	-	-	-	-	-
Ethernet / Web server	-	-	-	-	-	2	2	-	-	-	-	-
USB-C	1	1	1	1	1	1	1	-	-	-	-	-
Dimensions (1 DIN module = 17.5 mm)	6 DIN	6 DIN	6 DIN	6 DIN	6 DIN	6 DIN	6 DIN	4 DIN	4 DIN	6 DIN	4 DIN	4 DIN

Product details

General data

Table: General features

Features	Description
Power supply	24V AC/DC, 50/60 Hz to be protected by external fuse ⁽¹⁾ for DC only ⁽²⁾⁽³⁾ 30 W, min. 60 V A if transformer used ⁽⁴⁾
Mounting	DIN rail, vertical position
Plastic housing	Self-extinguishing V0 and glowing/hot wire test at 960 °C Ball test: 125 °C. Leakage current: ≥ 225 V according to IEC 60112
Type of control	To be integrated in Class I and/or II appliances
Type of action	1C; 1Y for version with SSR
Period of electric stress across insulating	Long
Pollution	Suitable for use in environments with degree of pollution 2
Immunity against voltage surges	Category II
Software class and structure	class A
Ambient temperature range, operating [°C]	-40 to +70 °C: for Lite, Mid, Pro version -40 to +70 °C: for Mid+, Pro+ versions without I/O Expansions attached. -40 to +65 °C otherwise UL: -40 to +65 °C -40 to +60 °C when Snap-on display (080G6016) is mounted
Ambient temperature range, transport [°C]	-40 to +80 °C
Enclosure rating IP	IP20, IP40 on the front when plate or display are mounted
Relative humidity range [%]	5 – 90%, non-condensing
Max installation height	2000 m

⁽¹⁾ 477 5x20 Series from Littelfuse (0477 3.15 MXP)

⁽²⁾ A higher DC voltage can be applied if the control is installed in an application where the manufacturer declares a reference standard and a voltage level for accessible SELV/PELV circuits to be considered non-hazardous by the application standard. That voltage level can be used as power supply input though 60 V DC must not be exceeded.

⁽³⁾ US: Class 2 < 100 VA

⁽⁴⁾ In short circuit condition DC power supply must be capable of supplying 7 A min. and 50 A max.

Input/Output

Table: Analog input (AI1, AI2, AI3, AI4, AI5, AI6, AI7, AI8, AI9, AI10)

Type	Feature	Data
0/4-20 mA	Accuracy	± 0.5% FS
	Resolution	1 µA
0/5 V Ratiometric		Relative to 5 V DC internal supply (10 – 90 %)
	Accuracy	±0.4% FS
	Resolution	1 mV
0 – 1 V 0 – 5 V 0 – 10 V	Accuracy	±0.5% FS (FS intended specifically for each type)
	Resolution	1 mV
	Input resistance	>100 kΩ
Pt1000	Meas. range	-60 to +180 °C
	Accuracy ⁽¹⁾	±0.7 K [-20 to +60 °C], ±1 K otherwise
	Resolution	0.1 K
PTC1000 (PTC 990 Ohm at 25 °C, e.g. EKS 111)	Meas. range	-60 to +80 °C
	Accuracy ⁽¹⁾	±0.7 K [-20 to +60 °C], ±1 K otherwise
	Resolution	0.1 K
NTC10k (beta 3435 at 25/85 °C, e.g. EKS 221)	Meas. range	-50 to +160 °C
	Accuracy	± 1 K [-30 to +160 °C]
	Resolution	0.1 K
NTC5k (beta 3980 at 25/100 °C, e.g. EKS 211)	Meas. range	-50 to +120 °C
	Accuracy	± 1 K [-35 to +120 °C]
	Resolution	0.1 K
Digital Input	Stimulation	Voltage free contact
	Contact cleaning	20 mA
	Other feature	Pulse counting function 150 ms debounce time

⁽¹⁾ For controller ambient temperature [-20 to +60 °C].

Table: Digital input (DI1, DI2)

Type	Feature	Data
Voltage free	Stimulation	Voltage free contact
	Contact cleaning	20 mA
	Other feature	Pulse counting function max. 2 kHz

Table: Analog output (AO1, AO2, AO3)

Type	Feature	Data
0 – 10 V	Max. load per each output	15 mA
	Accuracy	Source: 0.5% FS Sink 0.5% FS for Vout > 0.5 V 2% FS whole range (I<=1mA)
	Resolution	0.1% FS
Async PWM	Voltage output	Vout Low max. = 0.5 V Vout High min. = 9 – 15V
	Frequency range	15 Hz – 2 kHz
	Accuracy	1% FS
	Resolution	0.1% FS

Sync PWM/PPM	Voltage output	Vout Low max. = 0.5 V Vout High min. = 9 – 15V
	Frequency	Mains frequency x 2
	Resolution	0.1% FS

Table: Digital output

Type	Data
DO1, DO2, DO3, DO4, DO5	
Relay	SPST 3 A, 250 V AC, 50k cycles, resistive load 2 A, 250 V AC, 30k cycles, inductive load (ϕ 0.4)
DO5 for Mid SSR and Mid+ SSR	
Solid State Relay	SPST 230 V AC / 110 V AC / 24 V AC max 0.5 A
DO6	
Relay	SPDT 3 A, 250 V AC, 50k cycles, resistive load 2 A, 250 V AC, 30k cycles, inductive load (ϕ 0.4)
Isolation between relay in the DO1-DO5 group is functional. Isolation between DO1-DO5 group and DO6 is reinforced.	
Stepper motor output (A1, A2, B1, B2)	
Bipolar/Unipolar	<p>Danfoss valves:</p> <ul style="list-style-type: none"> • ETS / KVS / ETS C / KVS C / CCMT 2-CCMT 42 / CTR • ETS6 / CCMT 0 / CCMT 1 <p>Other valves:</p> <ul style="list-style-type: none"> • Speed 10 – 300 pps • Drive mode full step - 1/32 microstep • Max. peak phase current: 1 A (0.7 A RMS) • Output power: 10 W peak, 5 W average
Battery backup	V battery: 18 – 24 V DC ⁽²⁾ max. power 11 W, min. capacity 0.1 Wh

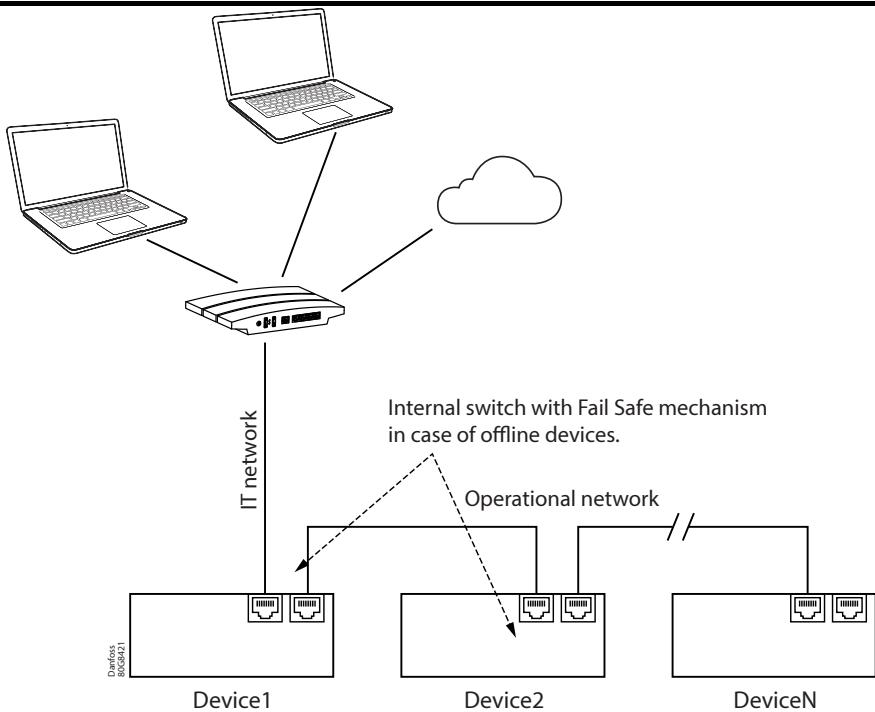
⁽²⁾ 477 5x20 Series from Littelfuse (0477 3.15 MXP).

Table: Aux power output

Type	Feature	Data
+5 V	+5 V DC	Sensor supply: 5 V DC / 80 mA
+15 V	+15 V DC	Sensor supply: 15 V DC / 120 mA

Communication interface

Table: Communication interface

Interface	Use and technical data	Available on
Ethernet	 <p>Internal switch with Fail Safe mechanism in case of offline devices.</p> <p>Point to point star topology with network hubs/switches. Each AS-CX device incorporates a switch with fail-safe technology which allows to daisy chain devices via Ethernet without the need of external switches and keep devices connected in case of offline devices; it also ensures IT and OT networks separation in case Device1 is offline.</p> <p>Ethernet type: 10/100TX auto MDI-X</p> <p>Protocols supported: HTTPS, Modbus, BACnet IP⁽¹⁾, MQTT⁽¹⁾</p> <p>Webserver functionality for Alsmart Service Tool.</p> <p>First access information:</p> <p>To access the web front-end interface of the device, enter the assigned IP address into the address bar of a standard web browser.</p> <p>The IP address allocation depends on the connection method:</p> <ul style="list-style-type: none"> Ethernet connection: <ul style="list-style-type: none"> By default, the device obtains its IP address automatically via DHCP. To determine the assigned IP address, press ENTER on the device keypad to access the default settings menu, then navigate to Ethernet Settings. USB connection (<i>RNDIS CDC ECM – Ethernet-over-USB service, enabled by default</i>) <ul style="list-style-type: none"> When the device is connected via USB, a network interface is automatically established between the PC and the device, requiring no additional configuration. <p>The device can be accessed using the static IP address 169.254.255.253 or the hostname AS-CX06.local.</p> <p>Upon connection, the browser will redirect to the login interface. Use the following factory-default credentials:</p> <ul style="list-style-type: none"> Username: Admin Password: Administrator Numeric password (LCD interface only): 12345 <p>After the initial successful login, the system will enforce a password change procedure.</p> <p>Important: Forgotten passwords cannot be retrieved.</p>	AS-CX06 Pro AS-CX06 Pro+

CAN FD	CAN FD communication is used for device-to-device communication. It is also used to connect Alsmart remote HMI via display port.	All models
RS485-1	RS485 ports are isolated and can be configured as client or server. They are used for fieldbus and BMS systems communication. Protocols supported: Modbus RTU, BACnet MSTP ⁽¹⁾	All models
RS485-2		AS-CX06 Mid (SSR) AS-CX06 Mid+ (SSR) AS-CX06 Pro AS-CX06 Pro+
USB-C	USB version 1.1/2.0 high speed, DRP and DRD support. Max. current 150 mA. For connection to pen drive (e.g. SW update, datalogging) and laptop (e.g. Alsmart Design programming tool, Alsmart Service Tool ⁽¹⁾). The controller in addition can be powered via USB to program software or configure parameters. In case the output capability of the USB port is not sufficient, then power it also with the 24 V input.	All models

⁽¹⁾ In preparation & continuously being updated.

AS-UI Snap-on and AS-UI Cover Kit

Identification

Figure: AS-UI Snap-on

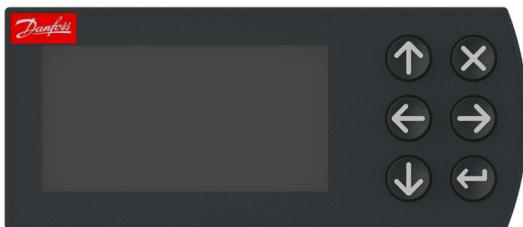


Table: Features

Features	Description
Power supply	From the main controller
Display	<ul style="list-style-type: none"> graphical LCD black and white transmissive resolution 128 x 64 dots dimmable backlight via software
Keyboard	6 keys individually managed via software
Ambient temperature range, operating [°C]	-20 to +60 °C
Ambient temperature range, transport [°C]	-40 to +80 °C
Enclosure rating IP	IP40
Relative humidity range [%]	5 – 90%, non-condensing
Max installation height	2000 m

Dimensions

Table: Wire lengths

Interface	Wire length (m)	Max. baudrate CAN (bps)	Min. wire size
Ethernet	100	10/100 Mbit/s	
Canbus	1000	50 kbit/s	0.83 mm ² - 18 AWG
	520	125 kbit/s	0.33 mm ² - 22 AWG
	250	250 kbit/s	0.21 mm ² - 24 AWG
	80	500 kbit/s	0.13 mm ² - 26 AWG
	30	1 Mbit/s	0.13 mm ² - 26 AWG
RS485	1000	125 kbit/s	0.33 mm ² - 22 AWG
Signal wiring	30		

Figure: Without LCD display


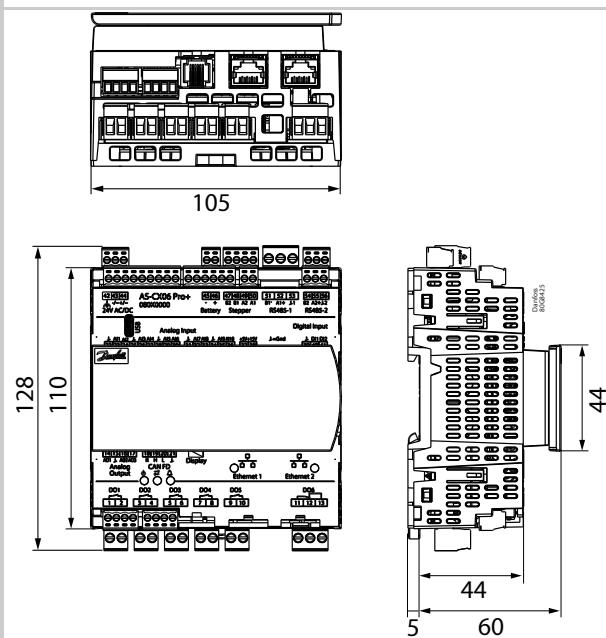


Figure: With Snap-on LCD display: 080G6016

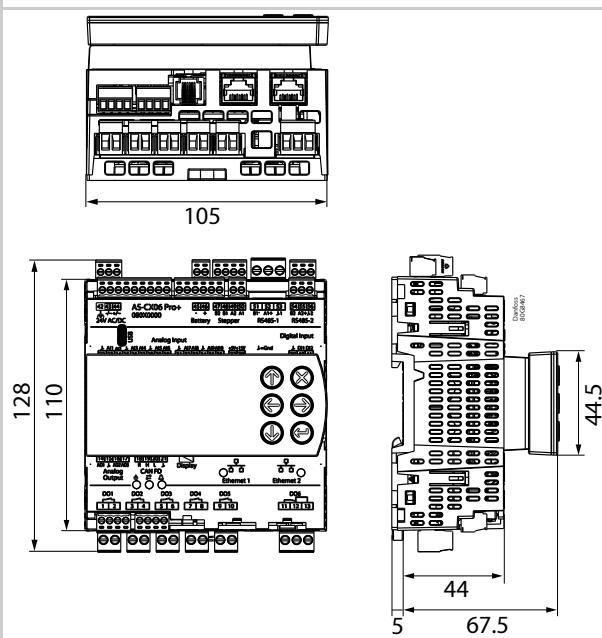

AS-UI Snap-on and AS-UI Cover Kit

Figure: AS-UI Snap-on (080G6016)	Figure: Dimensions
Figure: AS-UI cover kit (080G6018)	Figure: Dimensions

Connections

Table: Connections

Type	Color	Quantity			Pitch	Function
		Mid+ / Pro+	Mid / Pro	Lite		
Female screw plug, 2 poles	Grey	2	1	1	pitch 3.5 mm section cable 0.14 - 1.5 mm ²	+5 V, (Battery)
Female screw plug, 3 poles	Grey	2	2	1	pitch 3.5 mm section cable 0.14 - 1.5 mm ²	Digital Input, (RS485-2)
Female screw plug, 4 poles	Grey	3	2	2	pitch 3.5 mm section cable 0.14 - 1.5 mm ²	Analog Output, CAN-FD, (Stepper)
Female screw plug, 6 poles	Grey	1	1	1	pitch 3.5 mm section cable 0.14 - 1.5 mm ²	Analog Input (AI7-AI10)
Female screw plug, 9 poles	Grey	1	1	1	pitch 3.5 mm section cable 0.14 - 1.5 mm ²	Analog Input (AI1-AI6)
Female screw plug, 3 poles	Orange	1	1	1	pitch 3.5 mm section cable 0.14 - 1.5 mm ²	24 V
Female screw plug, 2 poles	Black	5	5	5	pitch 5 mm section cable 0.2 - 2.5 mm ²	Digital Output (DO1-DO5)
Female screw plug, 3 poles	Black	1	1	1	pitch 5 mm section cable 0.2 - 2.5 mm ²	Digital Output (DO6)
Female screw plug, 3 poles	Grey	1	1	1	pitch 5 mm section cable 0.2 - 2.5 mm ²	RS485-1
RJ12 plug	Black	1	1	1		CAN-FD Display
RJ45 plug	Black	2 (Pro/Pro+)				Ethernet1, Ethernet2
USB-C		1	1	1		USB

Connection diagrams

Figure: Top Board



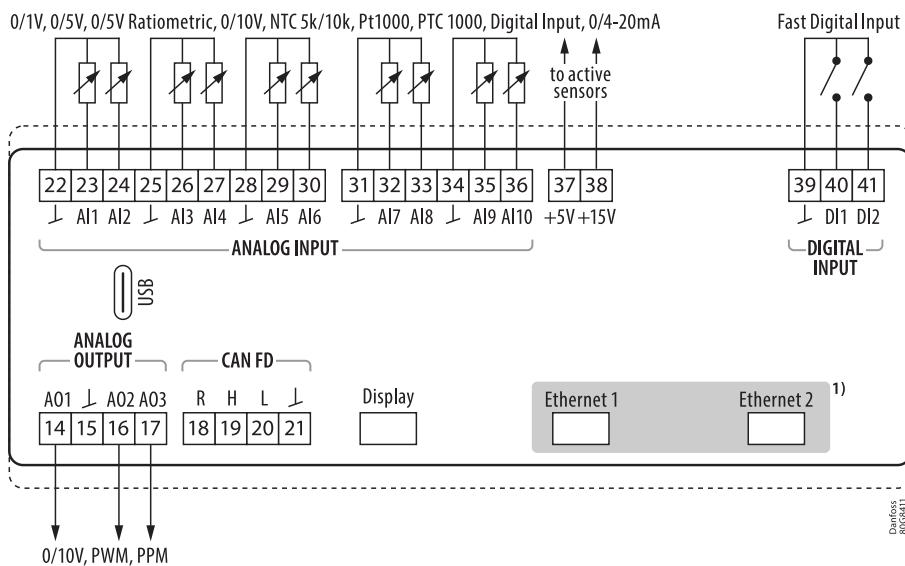


Figure: AI – DI configuration



Note: AI1 – AI10 can also be configured as Digital Input (DI)

Figure: Bottom Board

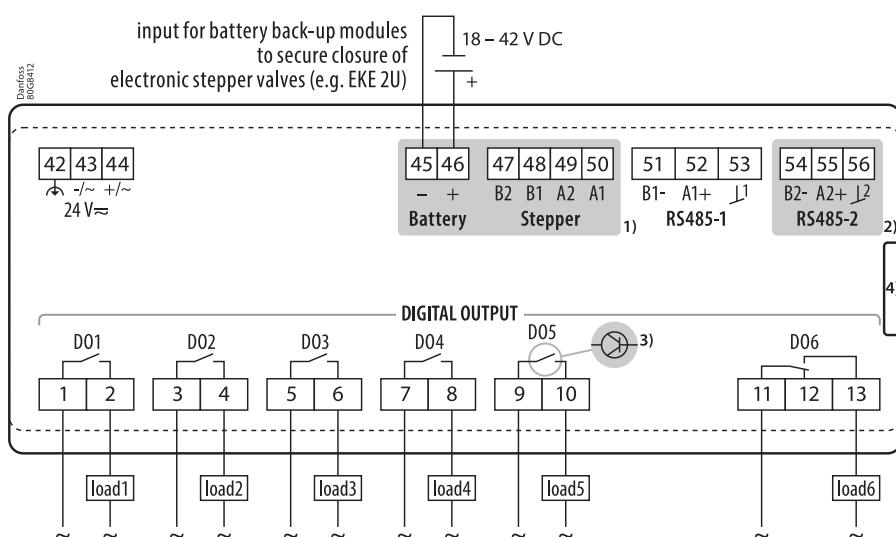

1) Available only on: Mid+, Pro+

2) Available only on: Mid, Mid+, Pro, Pro+


3) SSR is used in the place of SPST relay on some specific models.

4) Side-by-side connection to expansion modules for 080G6028-9 connectors.

Installation

Mounting


Figure: Unmounting

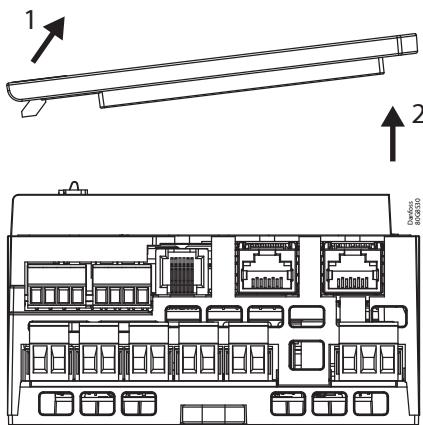

Replacement of the cover with the display and vice versa.

Remove the cover as shown in the *Figure: Unmounting*, first lifting the right side (point 1 in the *Figure: Unmounting*), applying a slight upward force to overcome the magnetic attraction between the cover and controller and then releasing the left side (point 2 in *Figure: Unmounting*).

Figure: Mounting

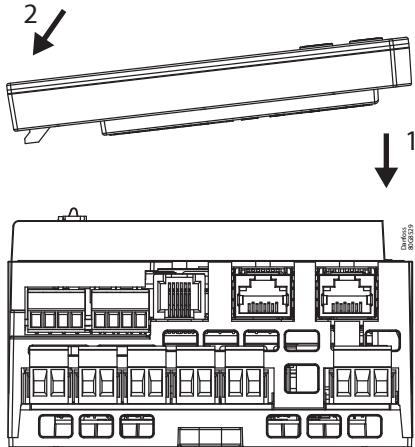

Mount the display as shown in the *Figure: Mounting*, first hooking the left side (point 1 in the *Figure: Mounting*) and then lowering the right side (point 2 in the *Figure: Mounting*) until the magnetic connection between the display and controller is established.

The procedure to replace the cover with display is the same.

Certificates, declarations and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

When you click on the link you will be directed to the latest version of the 'Declaration of Conformity'. Products developed and sold before this date of issue conform to the directives/standards in force at the time of their sale.

Approval type	Title	Certification body	Approval topic
Manufacturer's Declaration	Danfoss MD 080R6015.00	Danfoss	
EU-UK Declaration	Danfoss EU-UK 080R6012.02	Danfoss	LVD
Export Control Declaration	ALSMART programmable controllers	Danfoss	
Electrical Safety Certificate	UL E31024	UL - Underwriters Laboratories inc.	UL-CSA
Export Control Declaration	ALSMART Programmable Controller Accessories	Danfoss	

Mark ⁽¹⁾	Country
CE	EU
cURus (UL file E31024)	NAM (US and Canada)

⁽¹⁾ The list contains the main possible approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

Some approvals may be still in progress and others may change over time. You can check the most current status at the links indicated below.

Contact details

Online support

Danfoss offers a wide range of support along with our products, including digital information, software, mobile apps and expert guidance. See the possibilities below.



The Danfoss Design center

Discover the Design Center, our advanced digital platform that streamlines product selection. With integrated tools and enhanced type pages, it's simpler than ever to access product information and documentation, and to select the right products. Check the availability of Danfoss products at partner locations and enjoy seamless transitions from selection to purchase with our basket-to-basket functionality. Whether you're buying from our distributors or directly from the Product Store, the Design Center simplifies your experience. Learn more at: designcenter.danfoss.com.



The Danfoss product store

The Danfoss Product Store is a one-stop shop available 24/7 for our customers, no matter where you are in the world or what area of industry you work in. Browse our catalog, check product details and documentation, view your prices and product availability, and quickly finalize your purchase. Start browsing at: store.danfoss.com.



Danfoss Partner Portal/Product Data tool

Designed to support you with easy access to product data extracts, essential resources, tools, and information. The Partner Portal provides a centralized hub for product documentation, training materials, marketing assets, and technical support, ensuring you have everything you need to succeed and grow your business with Danfoss. The Partner Portal is available 24/7 at: partner.danfoss.com and is ready to support your business.



Find technical documentation

Find technical documentation you need to get your project up running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more. Start searching now at: documentation.danfoss.com.



Danfoss Learning

Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications industry topics, and trends that will help you do your job better. Find your local Danfoss website here: learning.danfoss.com.



Get local information and support

Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert - all in your own language. Find your local Danfoss website here: danfoss.com.

Danfoss A/S

Climate Solutions . danfoss.com . +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues description, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the products. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.