

ENGINEERING
TOMORROW

Danfoss

User Manual

Remote Control

R11 Receiver



Revision history*Table of revisions*

Date	Changed	Rev
January 2026	Updated technical description	0301
July 2024	Updated cover manual, safety information, technical description, and pinout information	0201
January 2019	Rebranded to Danfoss Power Solutions	0101

Contents**Safety instructions**

FCC rules.....	4
General safety.....	4
Safety warnings.....	5
Data Encryption.....	5

Technical description

Dimensions and identification.....	6
R11 detailed description.....	7

Installation

Receiver installation.....	8
R11 Pinout.....	8

Troubleshooting

2.4GHz Receiver LED troubleshooting.....	10
------------------------------------------	----

Safety instructions

FCC rules

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules.

Changes or modifications not expressly approved by the manufacturer can void the user's authority to operate the equipment.

To comply with FCC RF exposure compliance requirements, this device and its antenna must not be collocated with, or operating in conjunction with, any other antenna or transmitter, may not cause harmful interference, and must accept any interference received, including interference that may cause undesired operation.

The limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Warning

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. l'appareil ne doit pas produire de brouillage, et
2. l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

R11 General Safety

The following safety instructions must be read carefully to install and use the product properly, and to keep it in perfect working condition, and to reduce the risk of miss use.

- **Danfoss recommends the use of ESD PPEs (electrostatic discharge personal protection equipment).**
- Strictly adhere to the installation instructions contained in this document.
- Make sure that professional and competent personnel carry out the installation.
- Ensure that all on site and prevailing safety regulations are fully respected.
- The Electrical Installation where it may be connected, The receiver may be connected through an automatic magneto thermic switch (with omnipolar cut capacitance: F+N) and differential with characteristics according to the Low Voltage Recommendations.
- Make sure that this document is permanently available to the operator and maintenance personnel.
- Keep the transmitter out of reach of non-authorized personnel.
- Remove the transmitter key when the set is not in use.
- Check each working day the STOP button and other safety features. When in doubt, press the STOP button.
- Whenever several sets have been installed, make sure the transmitter is the right one. Identify the machine controlled on the label for this purpose on the transmitter or by using the display (in case it does have one).
- Service the equipment periodically.
- Avoid High Pressure water Spraying to Receivers while cleaning the machine
- When carrying out repairs, use spare parts supplied by Danfoss only.

Safety instructions

Warning

Potential damage to the operator or the product. Do not use this product on machines in potentially explosive atmospheres unless the model is ATEX/RATEX certified to work in such conditions.

R11 Safety Warnings

Potential damage to operator and product.

Follow the guidelines below to reduce risk of injury to the operator and the product.


- Use the device with the manufacturer's battery and battery charger (if applicable).
- Only allow qualified personnel to operate the equipment.
- Always set the STOP button in the off position when not in use.
- Always press STOP before plugging in tether cable (if applicable).
- Remove the Tether connection on the transmitter First (if applicable).
- Do not operate product when visibility is limited.
- Make sure product is compatible with the machine.
- Avoid knocking or dropping the product.
- Do not use the product if a failure is detected.

Changes or modifications not approved by Danfoss can void the user's authority to operate this product.


Quick reference precautions




Remove the EEPROM in order to disable the transmitter



When in doubt, press the STOP button



Make sure the transmitter works with the machine to be handled



Do not use the set when visibility is limited



Avoid knocking or dropping the set

Data Encryption


In alignment with **Commission Delegated Regulation (EU) 2022/30**, supplementing the **Radio Equipment Directive (RED) 2014/53/EU**, we are introducing **encryption for radio communication** in TM80 2.4 GHz platform. This measure is designed to:

- Protect the integrity and confidentiality of transmitted data
- Prevent unauthorized access and misuse of network resources

Technical description

R11 dimensions and identification

Dimensions in mm

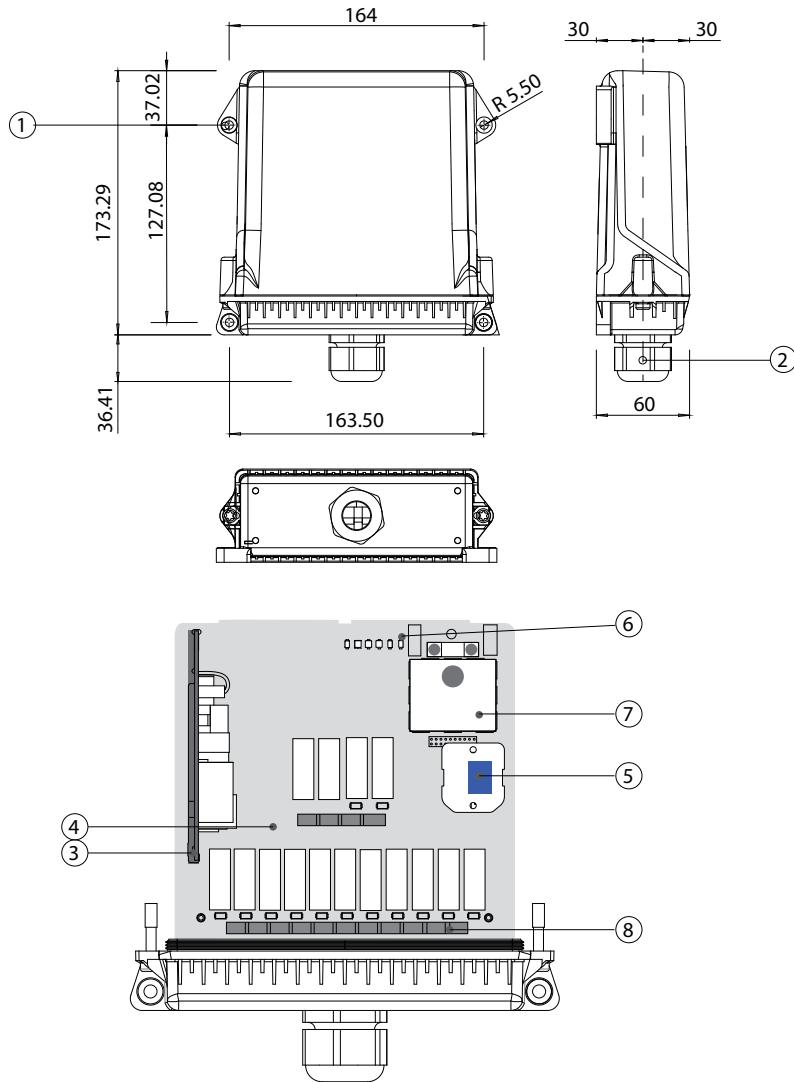

1. Fixing slots (fixed assembly or anti-vibration with magnets*)
2. M25 cable gland
3. Power supply
4. LR11 logic board
5. Removable EEPROM
6. Signaling LEDs
7. 2.4 GHz radio
8. Wiring connection

* The use of the anti-vibration kit is recommended in any case

Technical description

R11 detailed description

Technical data

Specification	Value
Stop function (2.4 GHz)	Cat. 4-PLe
Ingress protection	IP65/NEMA4
Frequency band - ERP	2405MHz to 2475MHz 20dBm/100mW
Range Line of sight (guaranteed)	100m
AC power supply	48 - 240 Vac / 18 - 30 Vac (500mA)
DC power supply	8 - 36 Vdc (2A)
Antenna	Internal
Removable EEPROM	Internal
Signaling	Internal
STOP Outputs (2.4GHz)	2 (6A)
Start Output	1 (8A)
Safety Relay	1 (8A)
ON/OFF outputs	11 (8A)
Proportional Outputs	N/A
CAN Bus Protocols	N/A
ON/OFF inputs	N/A
Proportional inputs	N/A
Maximum Total Output Current	8A
Response Time	100ms
Operating Temperature Range	-20°C to +70°C (-4°F to +158°F)
Storage Temperature Range (24h)	-25°C to 75°C (-13°F to 167°F)
Storage Temperature Range (long periods)	-25°C to 55°C (-13°F to 131°F)
Relative Humidity	max. 95% without condensation
Weight	800 grams
Dimensions LxWxH mm	164x210x60 mm
Tether Connector	N/A
Associated transmitters (2.4 GHz)	Ikore, IkoreB, Ikompact, Ikargo1, Ikargo2, IK1-G, IK2, IK3, IK4

Installation

R11 receiver installation


Risk of shock

Completely shut down the machine when installing the receiver.


Check the power supply and shut off the main switch to disconnect the interface cable between the receiver and the machine's electrical box.

1. Find an easily accessible and clear location with a direct vision between the receiver's antenna and the transmitter's working area.

It is strongly advised to avoid installing the receiver inside a closed metal enclosure.

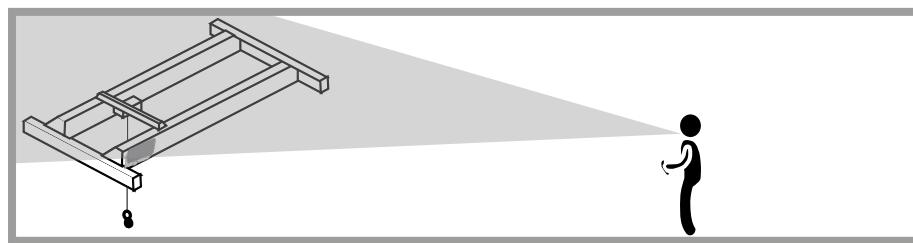

2. Optional: If high levels of vibration is expected, ensure shock-absorbers are being used.
3. Connect the power supply and the receiver's outputs using the connection block diagram provided with the system.

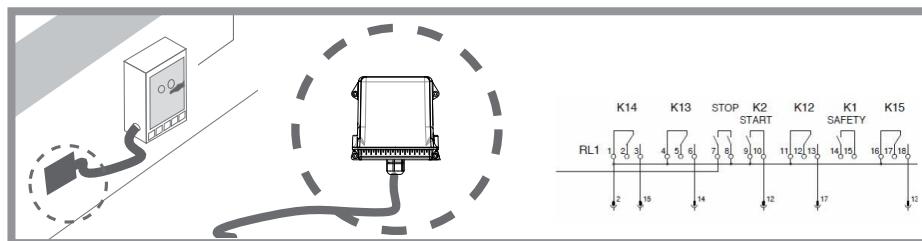

4. Check the electrical installation and verify if there is an option to connect the neutral or the ground cable. In that case, be sure to connect the ground cable.

To guarantee a reliable connection, apply a torque between 0.5 and 0.5 Nm to screw the connection terminals.

R11 Pinout


Pin out Description

Connector	Pin	Description	Connector	Pin	Description
I5	1	GND	I3	1	STOP1 NO Contact
	2			2	STOP1 Common
	3	VAC		3	STOP2 NO Contact
				4	STOP2 Common
				5	K1 NO Contact
				6	K1 Common
				7	K2 Common
				8	K2 NC Contact
				9	K2 NO Contact
I1	1	K3, K4, K5 Common	I2	1	K9 NO Contact

Installation

Pin out Description (continued)

Connector	Pin	Description	Connector	Pin	Description
	2	K3 NO Contact		2	K10 NO Contact
	3	K4 NO Contact		3	K11 NO Contact
	4	K5 NO Contact		4	K12 Common
	5	K6, K7, K8 Common		5	K12 NC Contact
	6	K6 NO Contact		6	K12 NO Contact
	7	K7 NO Contact		7	K13 Common
	8	K8 NO Contact		8	K13 NC Contact
	9	K9, K10, K11 Common		9	K13 NO Contact

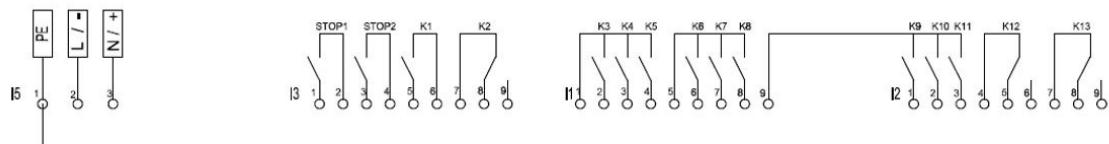

Troubleshooting

2.4GHz Receiver LED troubleshooting

The troubleshooting LEDs are located on the receiver board or accessible on the outside. Use the following table to identify faults and corrective action.

In order to reach the internal signaling, the receiver must be accessible, connected and the screws located on the receiver lid must be unscrewed using the proper screw driver whenever the LEDs are not externally visible.

The LEDs on the receiver board are POWER, STATUS, DIAG1, DIAG2, ORDER, RELAY, CANERR and CANRUN in that order.

Please do check the following website for further information:

<https://troubleshooting.dps-rct.com/en/customer-service-center>

LED	Color and frequency	Pulse frequency	Description	Action
POWER	Green continuous		Switched ON if powered	Check power supply if LED is switched off.
STATUS	Blue fast pulses		System is starting; establishing connection with radio and EEPROM	Wait
	Blue continuous		Waiting for transmitter communication, coming from ACTIVE STOP	Release STOP button and press START on the transmitter.
	Blue slow pulses		Waiting for transmitter communication, coming from PASSIVE STOP	Press Start on the Transmitter
	Green continuous		Working	Operate
	Red slow pulses		EEPROM module missing or corrupt	Check EEPROM and reprogram if necessary
	Red double pulses		Radio communication error	Replace receiver
	Red triple pulses		Secondary micro error or error between micro communication	Replace receiver
	Red 4 pulses		ERROR	Check DIAG1 LED
	Red 5 pulses		After 15 sec Not all expansion boards have been initialized	Check CAN wiring and Configuration(EEP or Expansion ID#), Check Bus Termination.
	Red 1 Long + 1 short pulse		CAN Signature ERROR	Check Signature in Compliance Block and EEPROM are the same.

Troubleshooting

LED	Color and frequency	Pulse frequency	Description	Action
DIAG1	Orange slow pulses		Low tension in the receivers power supply	Supply the system with the correct voltage
	Orange double pulses		Hardware error	Replace receiver
	Orange triple pulses			
	Orange 4 pulses			
	Green slow pulses		Low link quality	N/A
	Green double pulses		Medium link quality	N/A
	Green triple pulses		High link quality	N/A
DIAG2	NOT USED	NOT USED	NOT USED	N/A
ORDER	Green continuous		LED ON Whenever any output is ON	N/A
RELAY	Green continuous		STOP relay activated	N/A
CANERR	Red slow pulses		CAN Error, physical Layer	Verify Connections
	Red double pulses		One expansion has Stopped working	Verify Expansion boards
	Red 4 pulses		A Transmitted CAN frame has been lost	N/A
	Red 5 pulses		A Received CAN Frame has been lost	N/A
	Red continuous		CAN Bus OFF	Verify CAN connections and Status.
CANRUN	Green fast pulses		Pre operational Status, Receiver waiting for the controller.	Controller must send the Operational code to the Receiver.
	Green continuous		Receiver connected to the CAN network and operational	N/A

Products we offer:

- Cylinders
- Electric converters, machines, and systems
- Electronic controls, HMI, and IoT
- Hoses and fittings
- Hydraulic power units and packaged systems
- Hydraulic valves
- Industrial clutches and brakes
- Motors
- PLUS+1® software
- Pumps
- Steering
- Transmissions

Danfoss Power Solutions designs and manufactures a complete range of engineered components and systems. From hydraulics and electrification to fluid conveyance, electronic controls, and software, our solutions are engineered with an uncompromising focus on quality, reliability, and safety.

Our innovative products makes increased productivity and reduced emissions a possibility, but it's our people who turn those possibilities into reality. Leveraging our unsurpassed application know-how, we partner with customers around the world to solve their greatest machine challenges. Our aspiration is to help our customers achieve their vision — and to earn our place as their preferred and trusted partner.

Go to www.danfoss.com or scan the QR code for further product information.


Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Danfoss
Power Solutions (US) Company
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

Danfoss
Power Solutions GmbH & Co. OHG
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

Danfoss
Power Solutions ApS
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

Danfoss
Power Solutions Trading (Shanghai) Co., Ltd.
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.
All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.