

Data Sheet

EM-PMI540-T2000

Electric machine, permanent magnet internal

FEATURES

- Synchronous Reluctance assisted Permanent Magnet (SRPM) technology
- Extremely compact and robust structure
- Highest efficiency throughout the operation range on the market (~96 %)
- Liquid cooled with plain water or water/glycol mixture
- Low coolant flow required
- Allowed coolant temperature up to +65°C
- IP65 enclosure class to maximize reliability
- Multiple mounting possibilities



GENERATOR SPECIFIC FEATURES

- Standard SAE flange mounting to match the diesel engine connection
- Wide selection of speed ratings allowing the generator to be selected to customer specific applications with various voltage requirements
- Can be also used as starter motor for the ICE

MOTOR SPECIFIC FEATURES

- Extended speed and torque capabilities compared to standard PM motors from Danfoss reluctance assisted permanent magnet motor technology
- Motor structure is designed to be able to produce high starting torque: EM-PMI motor can produce instantly full torque to a non-rotating shaft
- Optimized speed range to meet the most common gear ratios used in heavy mobile machinery

GENERAL

The machine is developed especially for demanding applications. The design of these machines makes them smaller, lighter and more efficient than conventional products on the market.

TYPICAL APPLICATIONS

- Generator for diesel-electric/serial hybrid applications
- Traction/propulsion motor
- Generator/Motor for parallel hybrid applications

SPECIFICATIONS

General electrical properties		Maximum deceleration (shaft braking)	850 rad/s ²
Nominal voltage (line to line)	500 V _{AC}	Dimensions	
Voltage stress	IEC 60034-25, Curve A: Without filters for motors up to 500 V _{AC}	Length (frame)	598 mm
Nominal efficiency	96 %	Diameter (frame)	648 mm
Pole pair number	8	Cooling	
Power supply	Inverter fed.	Cooling liquid	Plain water with appropriate corrosive inhibitor (max. 50 % corrosive inhibitor)
Nominal inverter switching frequency	8 kHz	Cooling liquid corrosive inhibitor type	Ethylene glycol Glysantin G48 recommended
Basic information		Cooling method (IEC 60034-6)	IC 71 W
Machine type	Synchronous reluctance assisted permanent magnet	Minimum cooling liquid flow	20 l/min
Mounting direction	Horizontal or vertical assembly (V1, D-end shaft down), see user guide for details	Coolant circuit capacity	3.9 l
Mounting (IEC 60034-7)	IM 3001 (Flange)	Maximum operating pressure	2 bar
Standard Flange D-end (SAE J617)	SAE ½ mating transmission housing	Pressure loss	0.4 bar with 20l/min (+25°C coolant)
Standard axle spline D-end	DIN5480 W55x2x26x8a	Cooling liquid temperature max	+65°C / +40°C with +CL option (derating required if exceeded)
Bearing type	Standard: 6214/C3 (with LGHP2 grease) +BIN option: D-end: 6214/C3 (with LGHP2 grease), N-end: 6214/HC5C3 (with LGHP2 grease) +BIA option: 6214/HC5C3WT (with LGHP2 grease)	Temperature rating	
Standard rotation direction	Clockwise (both directions possible)	Insulation class (IEC 60034-1)	H (180°C)
Protection class	IP65 Tests: 0.3 bar under pressure held for 120 seconds. Pressure not allowed to drop under 0.1 bar	Temperature rise (IEC 60034-1)	85°C
Duty type (IEC 60034-1)	S9	Maximum winding temperature	150°C
Standard color	Dark grey RAL7024 powder coating	Nominal ambient temperature	+65°C / +45°C with +CL option
Mechanical		Min. ambient temperature	-40°C
Total weight	490 kg (no options)	Nominal altitude (IEC 60034-1)	1000 m
Moment of inertia	4.73 kgm ²	Vibration & Shock tolerance	
Rotating mass	189 kg	Mechanical vibration	5.9 G _{RMS} ISO 16750-3 Test VII – Commercial vehicle, sprung masses – Table 12 Notes: test duration 8h axis (two axes tested; radial and axial) total spectral acceleration 5,91 grms Test done with EM-PMI540-T1500
Maximum static torque on the shaft	6800 Nm	Mechanical shock	50 G ISO 16750-3
Maximum dynamic torque on the shaft	4000 Nm		

	4.2.2 Test for devices on rigid points on the body and on the frame Notes: –acceleration: 500 m/s ² ; –duration: 6 ms; –number of shocks: 10 per test direction. Test done with EM-PMI540-T1500		Plug: DEUTSCH 0413-003-1605 (size 16)
Connections		LV connector pin configuration	See Table below
Coolant connection	2 x G3/4 bore	Anti-condensation heater (+HEAT1 option)	130W 230 V _{AC} single phase heater resistor
HV cables	2 x 3 x 95 mm ² max.	Heater connection (+HEAT1 option)	Pflitsch blueglobe mstri212 (M12) and terminal strip inside connection box
HV cable glands	Pflitsch blueglobe TRI bg 232ms tri	Heater terminal strip pin configuration	See Table below
HV cable	Recommended H+S Radox screened cable	Bearing temp. measurement connector type	4-pin M12 A coded male
HV cable lug size	35-8, 50-8, 70-8	Bearing temp. measurement mating type	4-pin M12 A coded female
HV connection boxes	2 x 3 phase box	Bearing temp. measurement connector pin configuration	See Table below
LV connector	47 pin DEUTSCH HD34-24-47PE for resolver and temperature measurement.		
LV connector type	DEUTSCH HD34-24-47PE		
LV connector pin type	Gold plated		
LV mating connector type	DEUTSCH HD36-24-47SE or DEUTSCH HD36-24-47SE-059		
LV mating connector pin type	DEUTSCH 0462-201-1631 DEUTSCH 0462-005-2031 Plug: DEUTSCH 0413-204-2005 (size 20)		

PIN	Description
47	Temperature 1, PT100 (P), windings
46	Temperature 1, PT100 (N), windings
33	Temperature 2, PT100 (P), windings
32	Temperature 2, PT100 (N), windings
45	Temperature 3, PT100 (P), windings
31	Temperature 3, PT100 (N), windings
30	Temperature 4, PT100 (P), windings (+TEMP4 option)
29	Temperature 4, PT100 (N), windings (+TEMP4 option)
44	Temperature 5, PT100 (P), windings (+TEMP4 option)
43	Temperature 5, PT100 (N), windings (+TEMP4 option)
28	Temperature 6, PT100 (P), windings (+TEMP4 option)
16	Temperature 6, PT100 (N), windings (+TEMP4 option)
35	Resolver, RES_COS_N, in-built non-contacting
20	Resolver, RES_COS_P, in-built non-contacting
36	Resolver, RES_SIN_N, in-built non-contacting
21	Resolver, RES_SIN_P, in-built non-contacting
22	Resolver, EXCN, in-built non-contacting
10	Resolver, EXCP, in-built non-contacting
34	Resolver, SHIELD/GROUND, in-built non-contacting

Table 1 Pin configuration of LV-connector


PIN	Description
1	Phase, 230 V _{AC} / Neutral
2	Phase, 230 V _{AC} / Neutral
⊥	Ground/protective earth, M5 screw connection inside connection box

Table 2 Pin configuration of heater (pin configuration does not matter)

PIN	Description
1	PT-100
2	
3	PT-100_GND
4	

Table 3 Pin configuration of bearing temperature sensor connector (one sensor)

PRESSURE LOSS VS COOLANT FLOW

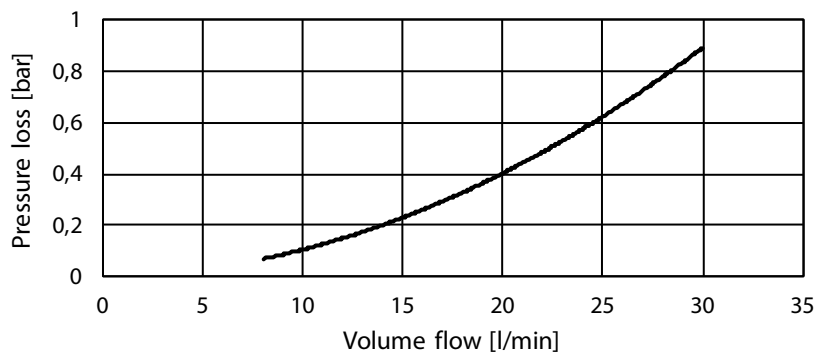

Picture 1 Pressure loss vs coolant flow

MOTORS

Type	Coolant temperature +65°C			Coolant temperature +40°C			Coolant temperature +40 / +65°C			
	Cont. Torque [Nm]	Cont. Power [kW]	Nom. Current [A]	Cont. Torque [Nm]	Cont. Power [kW]	Nom. Current [A]	Nom. speed [rpm]	Max. speed [rpm]	Peak torque SINGLE (*)	Peak torque DUAL (**)
EM-PMI540-T2000-700	2462	180	242	2716	199	267	700	1400	3400	3700
EM-PMI540-T2000-1300	2303	313	413	2386	325	431	1300	2600	1850	3700
EM-PMI540-T2000-1700	2009	358	485	2276	405	543	1700	3400	1400	2800
EM-PMI540-T2000-2100	1919	422	569	2153	473	633	2100	4000	1150	2300

(* Peak torque achieved with one 350A inverter)

(** Peak torque achieved with two 350A inverters)

GENERATORS

Type	Coolant temperature +65°C				Coolant temperature +40°C				Coolant temperature +40 / +65°C		
	Apparent power [kVA]	Cont. power [kW]	Nom. Current [A]	Power factor	Apparent power [kVA]	Cont. Power [kW]	Nom. Current [A]	Power factor	Nom. speed [rpm]	Nom. Freq. [Hz]	Volt/ speed ratio [V/rpm] (***)
EM-PMI540-T2000-700	211	201	241	0.95	233	221	266	0.95	800	107	0.714
EM-PMI540-T2000-1300	355	331	410	0.93	372	347	428	0.93	1400	186	0.363
EM-PMI540-T2000-1700	436	413	506	0.95	466	440	538	0.94	1900	253	0.272
EM-PMI540-T2000-2100	482	454	562	0.94	573	536	666	0.94	2300	307	0.227

(*** Back EMF for cold (20°C) generator)

PRODUCT CODE AND OPTIONS

Use product code including all needed options for ordering. Standard options are not given with the code as they are selected by default if a non-standard option is not selected. Standard options are indicated by a star (*).

Product code	Description
EM-PMI540-T2000-1700-DUAL	Standard 1700 rpm unit with standard options
EM-PMI540-T2000-1700-DUAL+BIN	Standard unit with insulated bearing in N-end

Table 4 Product code examples

Variant	Code	Description	Additional information
High voltage connections	-DUAL	Two galvanically isolated 3 phase systems	Two connection boxes each containing one 3 phase system with one M32 cable gland per phase
Connection extension	*	None	Two connection boxes each containing one 3 phase system with one M32 cable gland per phase
	+CE1	Double phase connections	Extended connection boxes with two M32 cable glands per phase
N-end attachment	*	None	
	+NE4	Male shaft, no flange	DIN5480 W55x2x26x8a
Bearing insulation	*	Non-insulated bearings	Non-insulated bearings
	+BIN	Insulated bearing in N-end	Insulated bearing in N-end
	+BIA	Insulated bearing in both ends	Insulated bearing in both ends
Shaft grounding	*	None	
	+SG1	D-end shaft grounding	In-built grounding ring
Rotation sensor	*	None	No resolver
	+RES1	Resolver	In-built non contacting resolver, 8-pole pair
Winding temperature sensors	*	Temperature surveillance	3 x PT100 (two wire) in windings
	+TEMP4	Redundant temperature surveillance	6 x PT100 (two wire) in windings
Bearing temperature sensors	*	None	
	+BTMP1	PT100 in bearings	Plug-in connector
Anti-condensation heaters	*	None	
	+HEAT1	One anti-condensation heater	230 V _{AC} / 130 W
Marine classification	*	No marine classification	
	+CL1		ABS American Bureau of Shipping
	+CL2		BV Bureau Veritas
	+CL3		DNV GL DNV GL AS
	+CL4		LR Lloyd's Register
	+CL5		RINA

*Standard option

Table 5 Option list

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.