Solenoid Valves Technical Information

2-Way Poppet HSVP10-NOR



OPERATION

This is a normally-open, pilot-operated, poppet-type 10-size solenoid valve with free reverse flow. When de-energized the valve allows flow from port 1 to 2 and from port 2 to 1. When energized, the pilot poppet closes allowing the valve to act as a check valve flowing from port 1 to port 2, while blocking flow from port 2 to 1. This valve comes standard with a push pin type manual override.

APPLICATIONS

This is a low leakage valve designed for use in load holding applications or as a general purpose diverter or dump valve.




Shown with Standard H16 Coil, Deutsch Connector

SPECIFICATIONS

Rated pressure*	350 bar [5075 psi]*
Rated flow at 7 bar	65 l/min
[100 psi]	[17 US gal/min]
Leakage	6 drops/min @
	Rated pressure
Weight	0.42 kg [0.93 lb]
Cavity	SDC10-2
Standard Coil	H16 29 Watt


^{*} Rated Pressure based on NFPA fatigue test standards (at 1 Million Cycles).

SCHEMATIC



PERFORMANCE CURVES

Pressure drop 26 cSt [121 SUS] hyd.oil at 50C [122F]

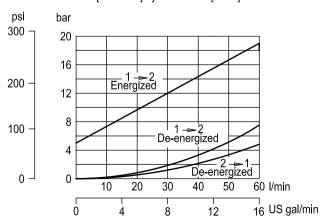



Solenoid Valves Technical Information


2-Way Poppet HSVP10-NOR




DIMENSIONS

Cross-sectional view

mm [in]

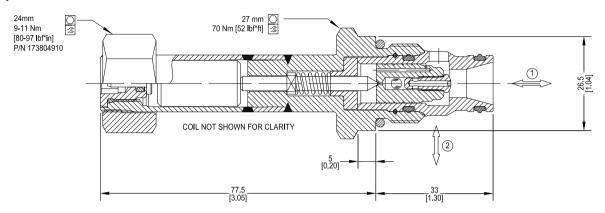

EXAMPLE CIRCUITS

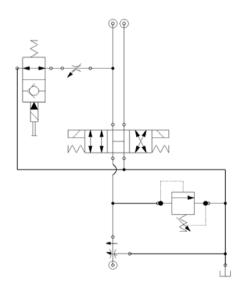

ORDERING INFORMATION

