

Data Sheet

Solenoid valves Type **EV212B**

Direct operated with isolated diaphragm for dirt and aggressive fluids



The isolating diaphragm design ensures that no fluid enters the armature area which means valves can be used for

- aggressive fluids
- fluid with impurities
- fluid with risk of lime stone build up


Applications

- Marine ballast water treatment systems (sample intake)
- Dosing systems
 - Washing and cleaning systems (Alkaline)
 - Filling
- Pump cooling fx. Vacuum systems
- Systems with particles (Dirt) and aggressive media

Features

- Stainless steel body
- Clip on coil
- Viscosity: up to 50 cSt
- Ambient temperature: up to 50 °C
- Coil enclosure: up to IP67

1 Portfolio overview

Features	EV212B
	
Body material	Stainless steel
DN [mm]	2-4.5
Connection	G1/8" - G3/8"
Sealing material	FKM
Function	NC
K _v [m³/h]	0.15-0.55
Differential pressure range [bar]	0-12
Temperature range [°C]	0-50

2 Functions

2.1 Function


Function NC

When voltage is applied to the coil (5), the armature (2) with the isolating diaphragm (3) is lifted clear of the valve orifice (4) and opens for flow through the valve. The valve is open as long as there is voltage to the coil.

When voltage is disconnected, the isolating diaphragm (3) is pressed down against the orifice by the spring (1). The valve will be closed for as long as the voltage to the coil is disconnected. The isolating diaphragm keeps the medium away from the actuator.

The space above the isolating diaphragm is filled up with silicone oil.

Figure 1: Function NC

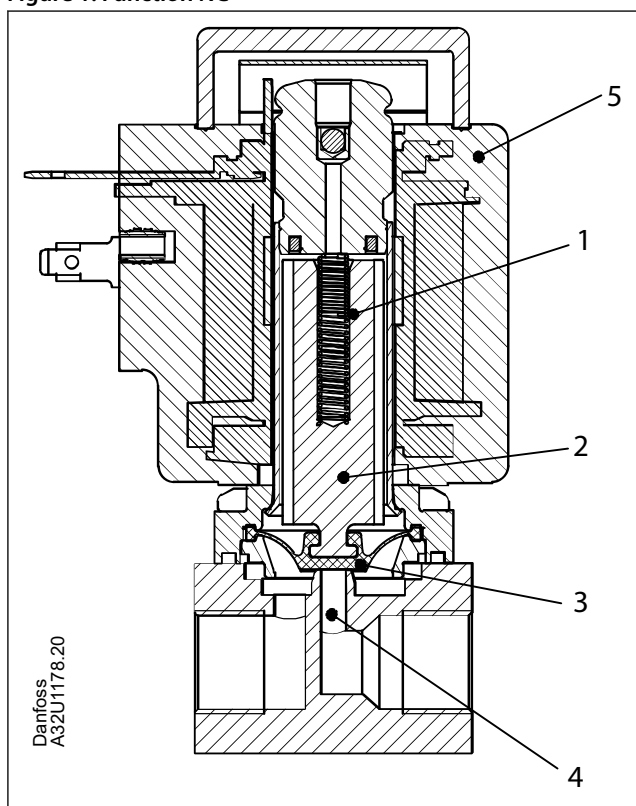


- | | |
|----|---------------------|
| 1. | Closing spring |
| 2. | Armature |
| 3. | Isolating diaphragm |
| 4. | Orifice |
| 5. | Coil |

3 Applications


It is recommended to use a filter in front of the valve. Recommended filter 50 mesh (297 microns).

Figure 2: Filter

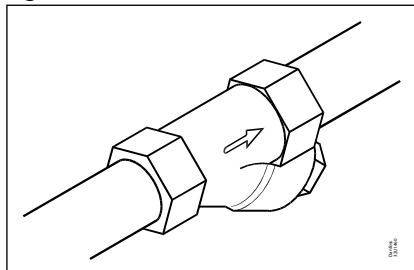

In water applications, exercise the valves at least once every 24 hours, meaning change the state of the valve. The valve exercise will minimize the risk of the valve sticking due to calcium carbonate, zinc or iron oxide build-up.

Figure 3: Exercise: Valve on/off

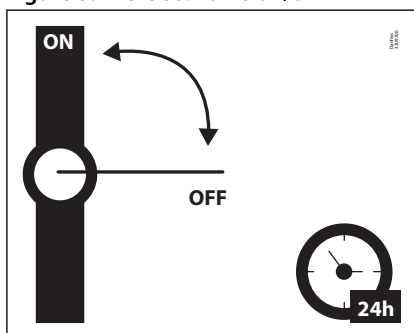

To minimize scaling, and corrosion attack it is recommended that the water passing the valve have the following values:

- Hardness 6-18 °dH to avoid scaling (chalk / lime stone build up).
- Conductivity 50 – 800 µS/cm to avoid brass dezincification and corrosion.
- Above 25°C media temperature avoid stagnant water inside the valve to avoid dezincification and corrosion attack.

4 Product specification

4.1 Technical data

Table 1: Technical data

Media	FKM	Contaminated or aggressive media
Media temperature [°C]	FKM	0-50°C
Ambient temperature [°C]	Max. 50 °C	
K _v value [m³/h]	DN2	0.15 m³/h
	DN3	0.3 m³/h
	DN4	0.38 m³/h
	DN4.5	0.55 m³/h
Min. Opening differential pressure [bar]	0 bar	
Max. Opening differential pressure [bar]	Up to 12 bar	
Max. working pressure [bar]	Up to 12 bar (Equal to max. differential pressure)	
Max. test pressure [bar]	DN2 - 4	18 bar
	DN 4.5	15 bar
Viscosity [cSt]	Max. 50 cSt	

Differential pressure range

Table 2: Differential pressure range

Connection ISO228/1	Orifice size [mm]	230 V 50 Hz / 24 V 50 Hz BB230AS / BB024AS 018F7351 / 018F7358	220-230 V BB230CS, 018F7363		208-230 V AC 50/60 Hz EEC BE240CS, 018F6783	12/24 V DC BB012DS, 018F7396 BB024DS, 018F7397
		[Bar]	50 Hz [Bar]	60 Hz [Bar]	[Bar]	[Bar]
G1/8	2	12	12	10	12	12
G1/4	2	12	12	10	12	12
G1/8	3	12	12	10	12	12
G1/4	3	12	12	10	12	12
G3/8	4	7.5	7.5	6	12	10
G1/4	4.5	6	6	5	10	10
G3/8	4.5	6	6	5	10	10

Materials

Table 3: Materials

Components	Materials	Specifications
Valve body	Stainless steel	W.no. 1.4404 / AISI 316L ⁽¹⁾
Flange for isolating diaphragm	Stainless steel	W.no. 1.4404 / AISI 316L ⁽¹⁾
Isolating diaphragm	FKM	
O-rings	FKM	
Fluid above isolating diaphragm	Silicone oil	


⁽¹⁾ W. No. according to DIN 17440

4.2 Dimensions and weight

Table 4: Dimensions and weight


Type	L	B	B ₁	H ₁	H	Weight without coil
			Coil type BB/BY/BE			
	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
EV212B 2SS G1/8	35	35	46	11,5	85	0,30
EV212B 2SS G1/4	35	35	46	11,5	85	0,29
EV212B 3SS G1/8	35	35	46	11,5	85	0,30
EV212B 3SS G1/4	35	35	46	11,5	85	0,29
EV212B 4SS G3/8	38	38	46	13	87	0,33
EV212B 4.5SS G1/4	35	35	46	11,5	85	0,29
EV212B 4.5SS G3/8	38	38	46	13	87	0,33

Figure 4: Dimensions

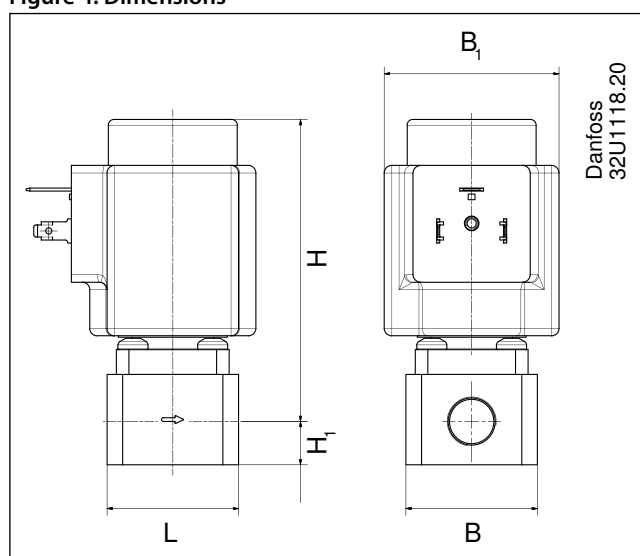

4.3 Mounting

Figure 5: Mounting angle

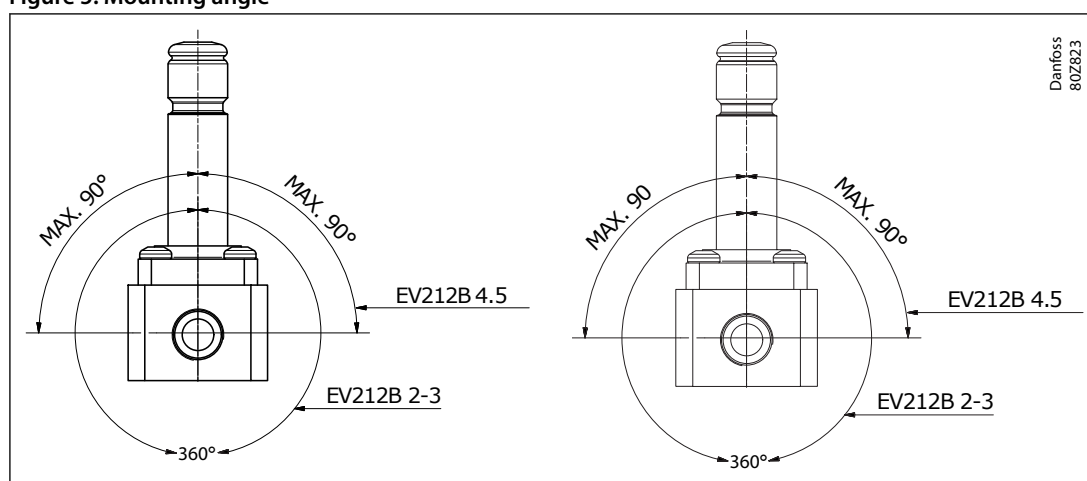

5 Ordering

5.1 Parts program

Table 5: Stainless steel, valve body NC

ISO228/1 connection	Orifice	K _v value	Function
	[mm]	[m ³ /h]	NC
G1/8	2	0.15	032U3576
G1/4	2	0.15	032U3578
G1/8	3	0.3	032U3581
G1/4	3	0.3	032U3751
G3/8	4	0.38	032U3754
G1/4	4.5	0.55	032U3590
G3/8	4.5	0.55	032U3762

5.2 Accessories

Coil

BB/BY high performance coil

Figure 6: BB/BY high performance coil



Table 6: High performance coils

Type	Tambient	Supply voltage	Voltage variation	Frequency	Control	Power consumption		Code no.
	[°C]	[V]		[Hz]		[W]	[VA]	
BB024AS	-40 – 80	24	-15%, +10%	50	NO, NC	11	19	018F7358
BB230AS	-40 – 80	220 - 230	-15%, +10%	50	NO, NC	11	19	018F7351
BB012DS	-40 – 50	12	±10%	DC	NC, NO, UN (Latching)	13		018F7396
BB024DS	-40 – 50	24	±10%	DC	NC, NO, UN (Latching)	16		018F7397

BR marine coils, high performance coils

Figure 7: BR marine coils, high performance coils



Table 7: BR marine coils, high performance coils

Type	Tambient	Supply voltage	Voltage variation	Frequency	Power consumption		Code no.
	[°C]	[V]		[Hz]	[W]	[VA]	
BR024CS	-40 – 50	24	±10%	50	14	26	018F4722
		24	±10%	60	12	21	
BR120CS	-40 – 50	110	±10%	50	14	27	018F4723
		110 – 120	±10%	60	14	27	

Solenoid valves, Type EV212B

Type	Tambient	Supply voltage	Voltage variation	Frequency	Power consumption		Code no.
	[°C]	[V]		[Hz]	[W]	[VA]	
BR230CS	-40 – 50	220 - 230	±10%	50	16	31	018F4720
			±10%	60	13	24	
BR024DS	-40 – 50	24	±10%	DC	16		018F4721

EEC Electronic coil controller

Figure 8: EEC Electronic coil controller



Table 8: High performance coils

Type	Tambient	Supply voltage	Voltage variation	Frequency	Control	Power consumption	Code no.
	[°C]	[V]		[Hz]		[W]	
BE240CS	-25 – 55	208 – 240	±10%	60	NO, NC	4	018F6783
		208 – 240	±10%	50	NO, NC	4	

Cable plug

Figure 9: Cable plug




Table 9: Cable plug

Cable plug size	Description	Code no
DIN 18	Cable plug IP67	042N1256

Universal electronic multi-timer Type ET 20 M

Figure 10: Type ET 20 M



Solenoid valves, Type EV212B

Table 10: Universal electronic multi-timer Type ET 20 M

Type	Voltage	Suitable for coil types	Code no.
	[V]		
BA024A	24 - 240	AL, AM, AS, AZ, BA, BD, BB	042N0185

6 Online support

Danfoss offers a wide range of support along with our products, including digital product information, software, mobile apps, and expert guidance. See the possibilities below.

The Danfoss Product Store



The Danfoss Product Store is your one-stop shop for everything product related—no matter where you are in the world or what area of the cooling industry you work in. Get quick access to essential information like product specs, code numbers, technical documentation, certifications, accessories, and more.

Start browsing at store.danfoss.com.

Find technical documentation



Find the technical documentation you need to get your project up and running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more.

Start searching now at www.danfoss.com/en/service-and-support/documentation.

Danfoss Learning



Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications, industry topics, and trends that will help you do your job better.

Create your Danfoss Learning account for free at www.danfoss.com/en/service-and-support/learning.

Get local information and support



Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert—all in your own language.

Find your local Danfoss website here: www.danfoss.com/en/choose-region.

Spare Parts



Get access to the Danfoss spare parts and service kit catalog right from your smartphone. The app contains a wide range of components for air conditioning and refrigeration applications, such as valves, strainers, pressure switches, and sensors.

Download the Spare Parts app for free at www.danfoss.com/en/service-and-support/downloads.

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.