Solenoid Valves

HSV08-23-02


Solenoid Valve, 3-way, 2-position, Spool Type

350 bar [5000 psi] • 15 l/min [4 US gpm]


OPERATION AND DESCRIPTION

This is a 3-way, 2-position, spool type, direct acting solenoid valve. In the de-energized condition, port 1 is open to port 2 and port 3 is blocked. When energized, port 3 is open to port 1 and port 2 is blocked. These valves can be used in normally open, normally closed or selector modes. Always check the operating envelope to make sure the valve will work under the required application conditions.

SCHEMATIC



DIMENSIONS

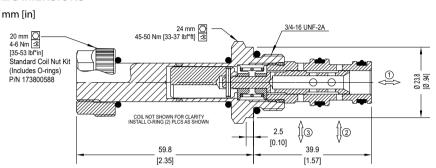



PERFORMANCE DATA

■ PERFORMANCE CURVES

| Rated Pressure* | 350 bar [5000 psi] |
|-----------------|---------------------|
| Flow Capability | 15 l/min [4 US gpm] |
| Coil Options | M13, R13 |
| Weight | 0.35 kg [0.77 lb] |
| Cavity | SDC08-3 |
| · | · |

^{*}Rated Pressure based on NFPA fatigue test standards (at 1 million cycles)





■ MODEL CODE

HSV08 - 23 - 02 - 12D - DE - XC - P - S3B

Coil Voltage

| Standard Coil Code | Robust Coil Code | Coil Voltage |
|-----------------------|---------------------|------------------------|
| 00 | R00 | No Coil, nut included* |
| 10D | R10D | 10 VDC |
| 12D | R12D | 12 VDC |
| 20D | R20D | 20 VDC |
| 24D | R24D | 24 VDC |
| 110A | | 110 VAC** |
| 220A | | 220 VAC** |
| | | |

^{*}Standard Coil - Plastic coil nut and o-rings (p/n 173800588)

| Co | nn | or | tor | ٠Tv | nο |
|----|----|----|-----|-----|----|

| Standard Robust Coil Code Coil Code 00 00 | | Connector P-Po Type | | |
|---|-------|--------------------------|--|--|
| | | No Coil | | |
| AJ | | Amp Junior | | |
| AJD | | Amp Junior with Diode | | |
| AS | AS | AMP SuperSeal 1.5 | | |
| ASD | ASDB* | AMP SuperSeal with Diode | | |
| DE | DE | Deutsch | | |
| DED | DEDB* | Deutsch with Diode | | |
| FL | FL | Flying Leads | | |
| FLD | FLDB* | Flying Leads with Diode | | |
| DN | | DIN 43650 | | |
| | | | | |

^{*}Bi-directional diode

Housing

| Code | Ports | Housing Model Code |
|------|----------------|--------------------|
| 00 | No Housing | |
| S3B | 3/8 BSP, Steel | CP08-3-S3B |
| S4S | #4 SAE, Steel | CP08-3-S4S |
| S6S | #6 SAE, Steel | CP08-3-S6S |
| | | |

^{*} Aluminum bodies are to be used for pressures less than 210 bar [3000 psi].

Seal Option

| ode | Seal kit |
|--------------------------|----------|
| Polyurethane Single Seal | 11167282 |

^{*}Robust Coil - Steel coil nut and no o-rings (p/n 173800539)

^{**}DIN only - external rectifier needed

^{*} Additional housings available