# **Solenoid Valves**

# SV10-23-02


Solenoid Valve, 3-way, 2-position, Spool Type

230 bar [3300 psi] • 28 l/min [7.4 US gpm]


# OPERATION AND DESCRIPTION

This is a 3-way, 2-position, spool type, direct acting solenoid valve. In the de-energized condition, port 1 is open to port 2 and port 3 is blocked. When energized, port 3 is open to port 1 and port 2 is blocked. These valves can be used in normally open, normally closed or selector modes. Always check the operating envelope to make sure the valve will work under the required application conditions.

#### **SCHEMATIC**



## DIMENSIONS

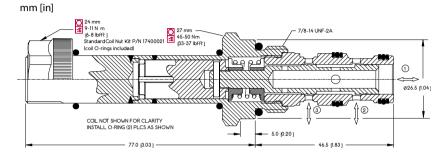


### **PERFORMANCE DATA**

Rated Pressure*	230 bar [3300 psi]**	
Flow Capability	28 l/min [7.4 US gpm]	
Coil Options	M16, R16	
Weight	0.42 kg [0.93 lb]	
Cavity	SDC10-3	

<sup>\*</sup>Rated Pressure based on NFPA fatigue test standards (at 1 million cycles)

#### **■ PERFORMANCE CURVES**

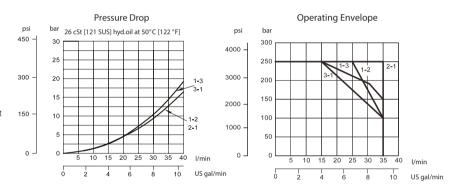

#### **■ MODEL CODE**

## SV10 - 23 - 02 - 12D - DE - B - 6S

## Coil Voltage

Standard Coil Code	Robust Coil Code	Coil Voltage
00	R00	No Coil, nut included*
10D	R10D	10 VDC
12D	R12D	12 VDC
20D	R20D	20 VDC
24D	R24D	24 VDC
110A		110 VAC**
220A		220 VAC**

<sup>\*</sup>Standard Coil - Plastic coil nut and o-rings (p/n 17400021)

# Connector Type

Standard Coil Code	Robust Coil Code	Connector Type
00	00	No Coil
AJ		Amp Junior
AJD		Amp Junior with Diode
AS	AS	AMP SuperSeal 1.5
ASD	ASDB*	AMP SuperSeal with Diode
DE	DE	Deutsch
DED	DEDB*	Deutsch with Diode
FL	FL	Flying Leads
FLD	FLDB*	Flying Leads with Diode
DN		DIN 43650
*Bi-directional diode		

#### Housing

Code	Ports	Housing Model Code
00	No Housing	
6S	#6 SAE, AL	CP10-3-6S
85	#8 SAE, AL	CP10-3-8S
S8S	#8 SAE, Steel	CP10-3-S8S
SE3B	3/8 BSP, AL	SDC10-3-SE3B
SE4B	1/2 BSP, AL	SDC10-3-SE4B
S4B	1/2 BSP, Steel	CP10-3-S4B

<sup>\*</sup> Aluminum bodies are to be used for pressures less than 210 bar [3000 psi].

#### Seal Option

25 100 1210
354004210
354003719

<sup>\*\*</sup>Valve can operate at 315 bar [4600 psi] for 500,000 cycles. With inlet at port 2, this can be increased to 300,000 cycles.

<sup>\*</sup>Robust Coil - Steel coil nut and no o-rings (p/n 173804910)

<sup>\*\*</sup>DIN only - external rectifier needed

<sup>\*</sup> Additional housings available