Solenoid Valves

SV10-24-05


Solenoid Valve, 4-way, 2-position, Spool Type

230 bar [3300 psi] • 30 l/min [8 US gpm]


OPERATION AND DESCRIPTION

This is a 4-way, 2-position, spool type, direct acting solenoid valve. When de-energized, port 3 is open to 4 and port 2 to 1. In the energized condition, all ports are blocked. These valves can be used to isolate a function when required. Always check the operating envelope to make sure the valve will work under the required application conditions. Port 1 is not intended for use as inlet (Tank only).

SCHEMATIC



DIMENSIONS

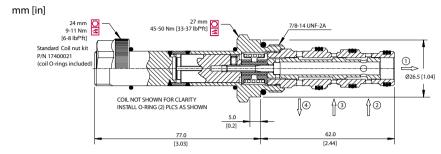


■ PERFORMANCE DATA

Rated Pressure*	230 bar [3300 psi]** 30 l/min [8 US gpm]	
Flow Capability		
Coil Options	M16, R16	
Weight	0.45 kg [0.99 lb]	
Cavity	SDC10-4	

^{*}Rated Pressure based on NFPA fatigue test standards (at 1 million cycles)

■ PERFORMANCE CURVES

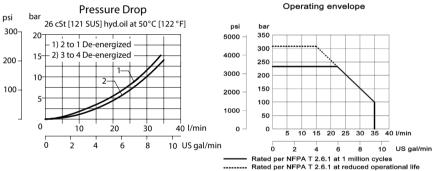

Housing

Ports

No Housing

#6 SAE, AL

#8 SAE, AL

#8 SAE, Steel

3/8 BSP, AL

1/2 BSP, AL

* Additional housings available

Caal bis

1/2 BSP, Steel

Code

00

65

S8S

L3B

L4B

S4B

Housing Model Code

CP10-4-6S

CP10-4-8S

CP10-4-S8S

SDC10-4-L3B SDC10-4-L4B

CP10-4-S4B

* Aluminum bodies are to be used for pressures less than 210 bar [3000 psi].

MODEL CODE

SV10 - 24 - 05 - 12D - DE - B - 6S

Coil Voltage

Standard Coil Code	Robust Coil Code	Coil Voltage
00	ROO	No Coil, nut included*
10D	R10D	10 VDC
12D	R12D	12 VDC
20D	R20D	20 VDC
24D	R24D	24 VDC
110A		110 VAC**
220A		220 VAC**


^{*}Standard Coil - Plastic coil nut and o-rings (p/n 17400021)

Connector Type

Standard Coil Code	Robust Coil Code	Connector Type
00	00	No Coil
AJ		Amp Junior
AJD	,	Amp Junior with Diode
AS	AS	AMP SuperSeal 1.5
ASD	ASDB*	AMP SuperSeal with Diode
DE	DE	Deutsch
DED	DEDB*	Deutsch with Diode
FL	FL	Flying Leads
FLD	FLDB*	Flying Leads with Diode
DN		DIN 43650
*Bi-directional di	ode	

Seal Option

coue	Sear Kit
B -Buna - N	354001919
V -Viton	354002019



^{**}Valve can operate with an inlet pressure of 315 bar [4600 psi] at port 3 for 400,000 cycles.

^{*}Robust Coil – Steel coil nut and no o-rings (p/n 173804910) **DIN only - external rectifier needed