


SK100GD066T

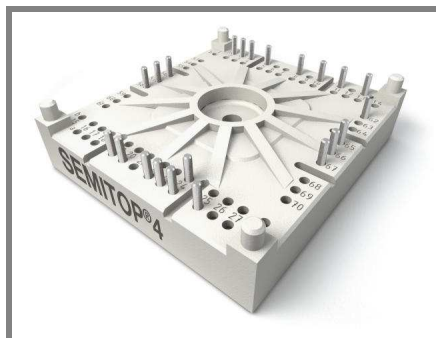

SEMITOP® 4

IGBT Module

SK100GD066T


Preliminary Data

Features

- One screw mounting module
- Fully compatible with SEMITOP®1,2,3
- Improved thermal performances by aluminium oxide substrate
- Trench IGBT technology
- CAL technology FWD
- Integrated NTC temperature sensor

Typical Applications*


- Inverter up to 22 kVA
- Typ. motor power 11 kW



GD-T

Absolute Maximum Ratings		$T_s = 25\text{ °C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT			
V_{CES}	$T_j = 25\text{ °C}$	600	V
I_C	$T_j = 175\text{ °C}$	$T_s = 25\text{ °C}$	105 A
		$T_s = 70\text{ °C}$	85 A
I_{CRM}	$I_{CRM} = 2 \times I_{Cnom}$	200	A
V_{GES}		± 20	V
t_{psc}	$V_{CC} = 360\text{ V}$; $V_{GE} \leq 20\text{ V}$; $T_j = 125\text{ °C}$ $V_{CES} < 600\text{ V}$	6	μs
Inverse Diode			
I_F	$T_j = 175\text{ °C}$	$T_s = 25\text{ °C}$	99 A
		$T_s = 70\text{ °C}$	79 A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$	120	A
Module			
$I_{t(RMS)}$			A
T_{vj}		-40 ... +175	$^{\circ}\text{C}$
T_{stg}		-40 ... +125	$^{\circ}\text{C}$
V_{isol}	AC, 1 min.	2500	V

Characteristics		$T_s = 25\text{ °C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT					
$V_{GE(th)}$	$V_{GE} = V_{CE}$, $I_C = 1,6\text{ mA}$	5	5,8	6,5	V
I_{CES}	$V_{GE} = 0\text{ V}$, $V_{CE} = V_{CES}$			0,005	mA
					mA
I_{GES}	$V_{CE} = 0\text{ V}$, $V_{GE} = 20\text{ V}$			600	nA
					nA
V_{CE0}				0,9	V
					V
r_{CE}	$V_{GE} = 15\text{ V}$			5,5	m Ω
					m Ω
$V_{CE(sat)}$	$I_{Cnom} = 100\text{ A}$, $V_{GE} = 15\text{ V}$			1,45	V
					V
C_{ies}	$V_{CE} = 25$, $V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$		6,1	nF
C_{oes}					nF
C_{res}					nF
$t_{d(on)}$	$R_{Gon} = 32\text{ }\Omega$	$V_{CC} = 300\text{ V}$ $I_C = 100\text{ A}$		144	ns
t_r					ns
E_{on}	$R_{Goff} = 32\text{ }\Omega$ $di/dt = 2575\text{ A}/\mu\text{s}$	$T_j = 150\text{ °C}$ $V_{GE} = -7/+15\text{ V}$		7	mJ
$t_{d(off)}$					ns
t_f					ns
E_{off}				1040	mJ
$R_{th(j-s)}$					K/W
	per IGBT			0,65	

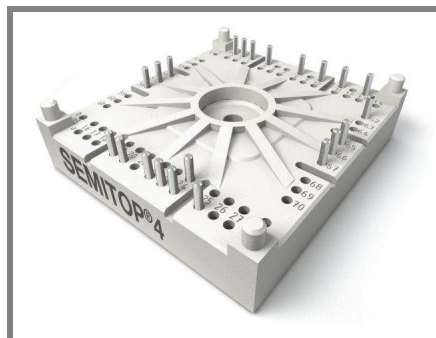

SEMITOP® 4

IGBT Module

SK100GD066T


Preliminary Data

Features

- One screw mounting module
- Fully compatible with SEMITOP®1,2,3
- Improved thermal performances by aluminium oxide substrate
- Trench IGBT technology
- CAL technology FWD
- Integrated NTC temperature sensor

Typical Applications*

- Inverter up to 22 kVA
- Typ. motor power 11 kW





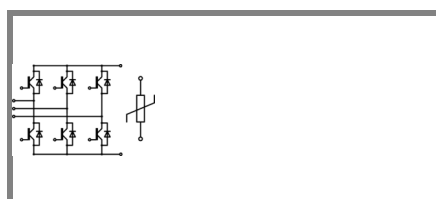





GD-T


Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
Inverse Diode					
$V_F = V_{EC}$	$I_{Fnom} = 100 \text{ A}; V_{GE} = 0 \text{ V}$				
	$T_j = 25 \text{ }^{\circ}\text{C}_{chiplev.}$		1,3		V
	$T_j = 150 \text{ }^{\circ}\text{C}_{chiplev.}$		1,3		V
V_{F0}					
	$T_j = 25 \text{ }^{\circ}\text{C}$		0,95		V
	$T_j = 150 \text{ }^{\circ}\text{C}$		0,85		V
r_F					
	$T_j = 25 \text{ }^{\circ}\text{C}$		3,5		mΩ
	$T_j = 150 \text{ }^{\circ}\text{C}$		4,5		mΩ
I_{RRM}	$I_F = 100 \text{ A}$		60		A
Q_{rr}	$di/dt = 2575 \text{ A}/\mu\text{s}$		5,6		μC
E_{rr}	$V_{CC} = 300\text{V}$		1,7		mJ
$R_{th(j-s)D}$	per diode		0,8		K/W
M_s	to heat sink	2,5		2,75	Nm
w			60		g
Temperature sensor					
R_{100}	$T_s = 100^{\circ}\text{C} (R_{25}=5\text{k}\Omega)$		493±5%		Ω

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.


* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

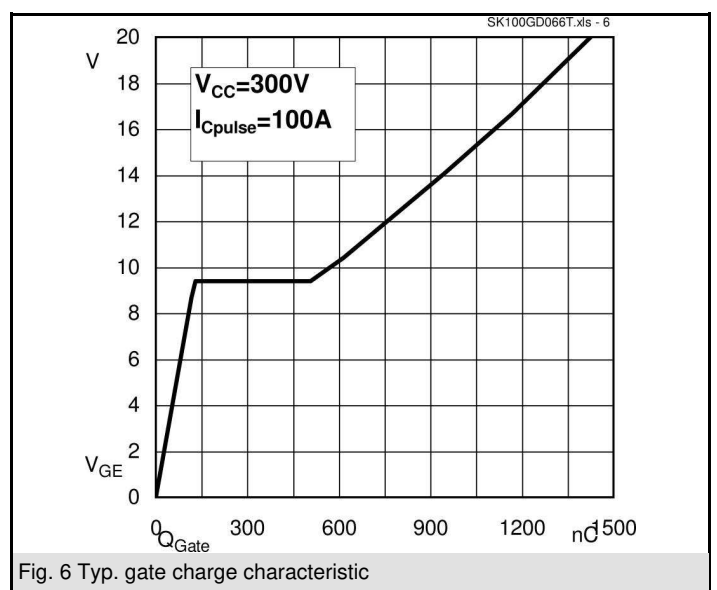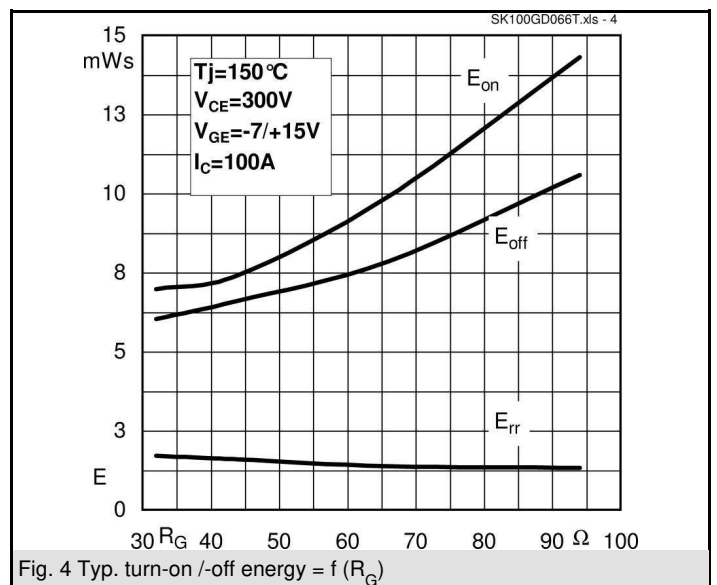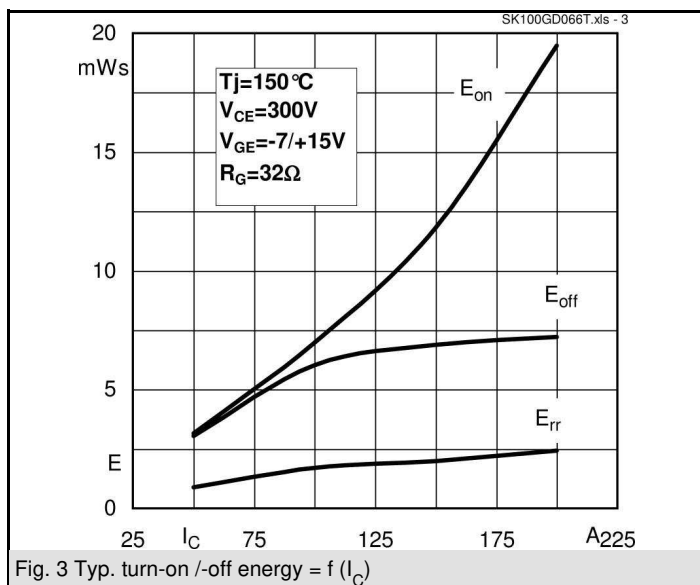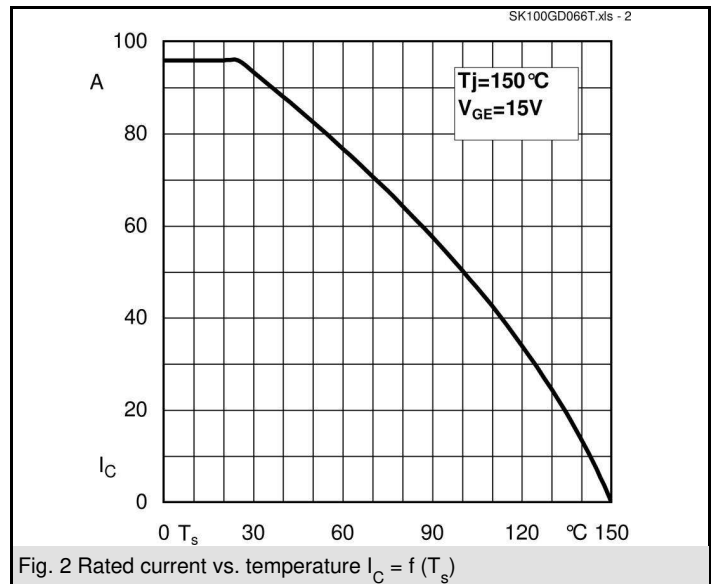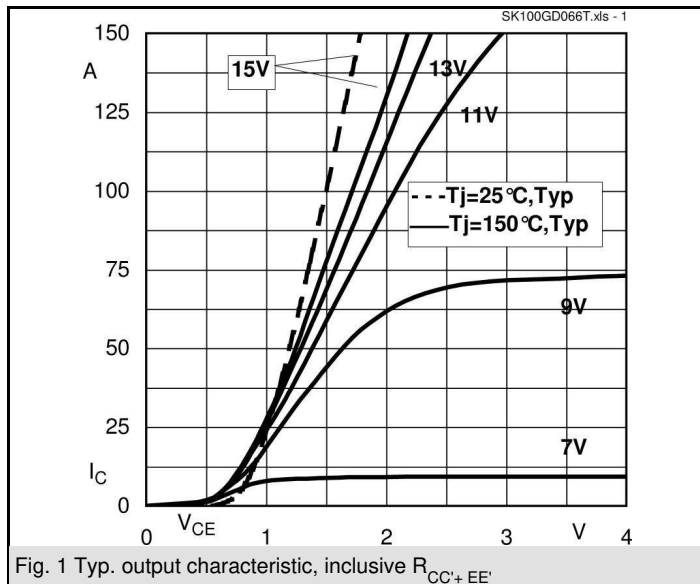

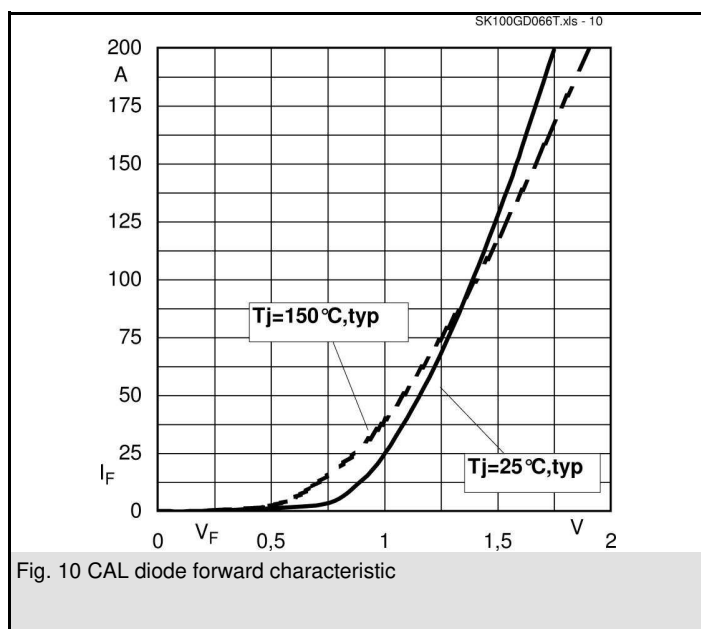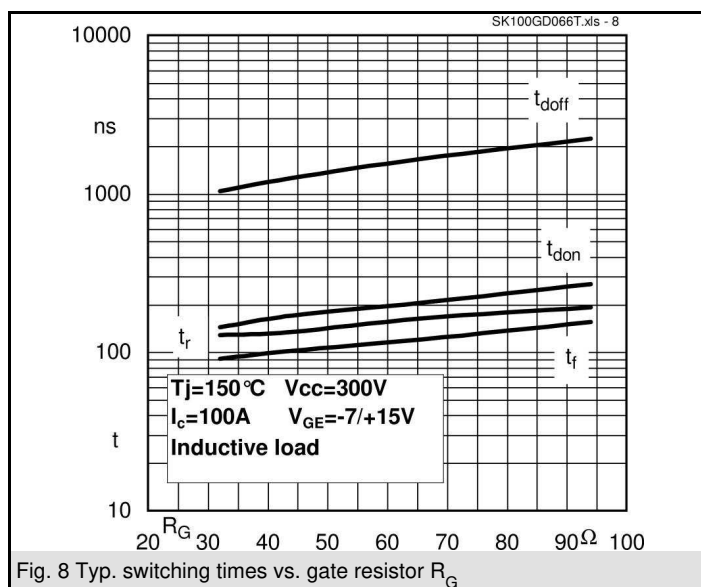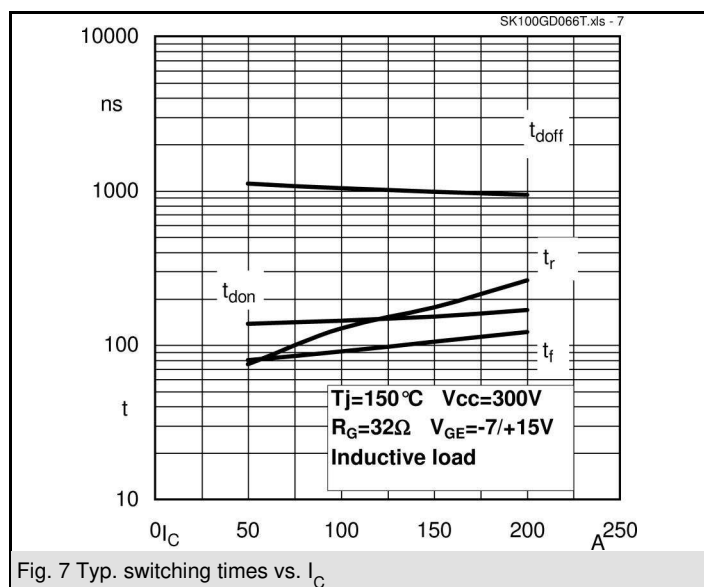

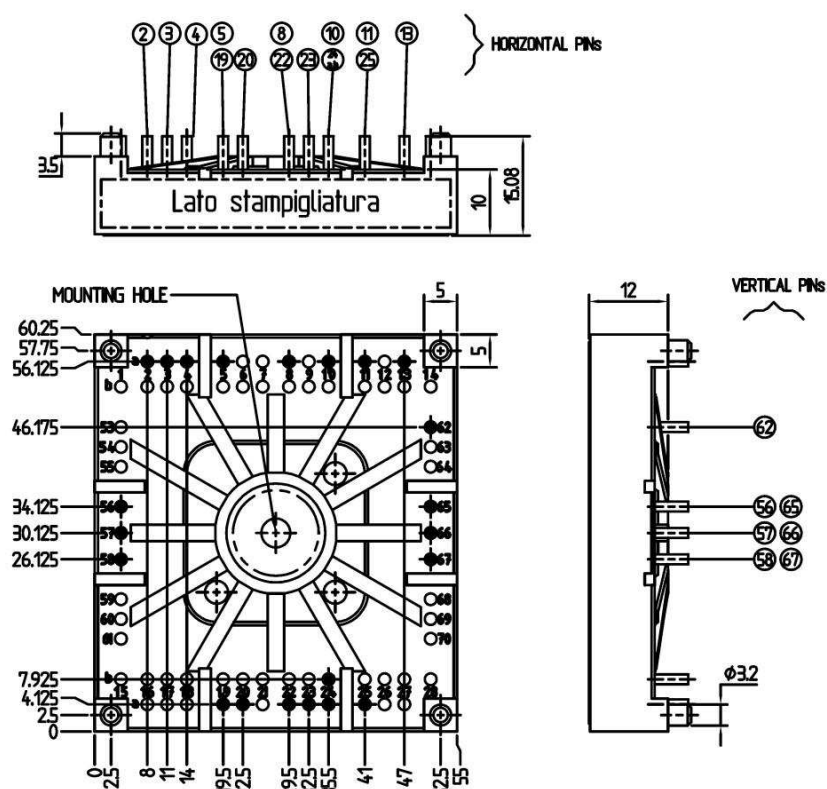

Case T74 (Suggested hole diameter for the solder pins in the circuit board: 2mm. Suggested hole diameter for the mounting pins in the circuit board: 3,6mm)

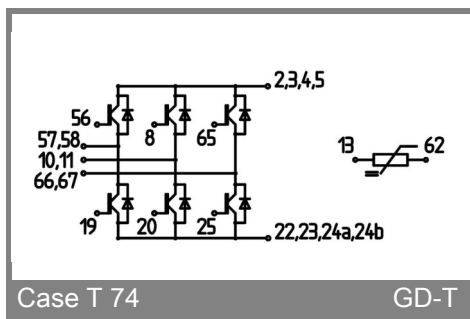

Case T 74

GD-T