



SEMITRANS® 3

High Speed IGBT4 Modules

SKM400GB12F4

Features*


- High speed trench and field-stop IGBT
- CAL4 ultra-fast = soft switching 4. generation CAL-diode
- Insulated copper baseplate using DBC technology (Direct Bonded Copper)
- Increased power cycling capability
- For higher switching frequencies above 15kHz
- UL recognized, file no. E63532

Typical Applications

- UPS
- Electronic welders
- Inductive heating
- Switched mode power supplies

Remarks

- Case temperature limited to $T_c = 125^\circ\text{C}$ max.
- Recommended $T_{j,op} = -40 \dots +150^\circ\text{C}$
- Product reliability results valid for $T_j = 150^\circ\text{C}$

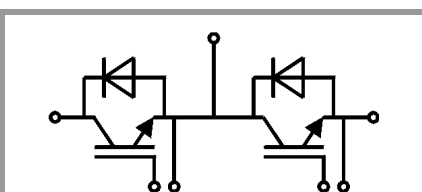

GB

Absolute Maximum Ratings						
Symbol	Conditions		Values			Unit
IGBT						
V _{CES}	T _j = 25 °C		1200			V
I _C	T _j = 175 °C	T _c = 25 °C	566			A
		T _c = 80 °C	432			A
I _{Cnom}			400			A
I _{CRM}			800			A
V _{GES}			-20 ... 20			V
t _{psc}	V _{CC} = 800 V V _{GE} ≤ 15 V V _{CES} ≤ 1200 V R _{G on/off} ≥ 3 Ω	T _j = 150 °C	10			μs
T _j			-40 ... 175			°C
Inverse diode						
V _{RRM}	T _j = 25 °C		1200			V
I _F	T _j = 175 °C	T _c = 25 °C	402			A
		T _c = 80 °C	295			A
I _{FRM}			800			A
I _{FSM}	t _p = 10 ms, sin 180°, T _j = 25 °C		1980			A
T _j			-40 ... 175			°C
Module						
I _{t(RMS)}			500			A
T _{stg}	module without TIM		-40 ... 125			°C
V _{isol}	AC sinus 50 Hz, t = 1 min		4000			V
Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
IGBT						
V _{CE(sat)}	I _C = 400 A V _{GE} = 15 V chipelevel	T _j = 25 °C	2.06	2.44		V
		T _j = 150 °C	2.59	2.97		V
V _{CE0}	chipelevel	T _j = 25 °C	1.10	1.28		V
		T _j = 150 °C	0.95	1.13		V
r _{CE}	V _{GE} = 15 V chipelevel	T _j = 25 °C	2.4	2.9		mΩ
		T _j = 150 °C	4.1	4.6		mΩ
V _{GE(th)}	V _{GE} =V _{CE} , I _C = 15.2 mA		5.1	5.8	6.4	V
I _{CES}	V _{GE} = 0 V, V _{CE} = 1200 V, T _j = 25 °C				5	mA
C _{ies}	V _{CE} = 25 V V _{GE} = 0 V	f = 1 MHz	24.6			nF
C _{oes}		f = 1 MHz	1.62			nF
C _{res}		f = 1 MHz	1.38			nF
Q _G	V _{GE} = - 8 V...+ 15 V		2268			nC
R _{Gint}	T _j = 25 °C		1.6			Ω
t _{d(on)}	V _{CC} = 600 V	T _j = 150 °C	110			ns
t _r	I _C = 400 A	T _j = 150 °C	55			ns
E _{on}	V _{GE} = +15/-15 V R _{G on} = 2 Ω	T _j = 150 °C	28			mJ
t _{d(off)}	R _{G off} = 1 Ω	T _j = 150 °C	415			ns
t _f	di/dt _{on} = 7960 A/μs di/dt _{off} = 4430 A/μs	T _j = 150 °C	75			ns
E _{off}	dv/dt = 4530 V/μs	T _j = 150 °C	32			mJ
R _{th(j-c)}	per IGBT				0.068	K/W
R _{th(c-s)}	per IGBT (λ _{grease} =0.81 W/(m²K))			0.041		K/W



SEMITRANS® 3

High Speed IGBT4 Modules

SKM400GB12F4

Features*

- High speed trench and field-stop IGBT
- CAL4 ultra-fast = soft switching 4. generation CAL-diode
- Insulated copper baseplate using DBC technology (Direct Bonded Copper)
- Increased power cycling capability
- For higher switching frequencies above 15kHz
- UL recognized, file no. E63532


Typical Applications

- UPS
- Electronic welders
- Inductive heating
- Switched mode power supplies

Remarks

- Case temperature limited to $T_c = 125^\circ\text{C}$ max.
- Recommended $T_{j,op} = -40 \dots +150^\circ\text{C}$
- Product reliability results valid for $T_j = 150^\circ\text{C}$

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
Inverse diode						
V _F = V _{EC}	I _F = 400 A	T _j = 25 °C		2.55	2.93	V
	V _{GE} = 0 V chiplevel	T _j = 150 °C		2.44	2.80	V
V _{F0}	chiplevel	T _j = 25 °C		1.51	1.75	V
		T _j = 150 °C		1.16	1.40	V
r _F	chiplevel	T _j = 25 °C		2.6	2.9	mΩ
		T _j = 150 °C		3.2	3.5	mΩ
I _{RRM}	I _F = 400 A	T _j = 150 °C		424		A
Q _{rr}	di/dt _{off} = 7183 A/μs	T _j = 150 °C		51		μC
E _{rr}	V _{GE} = -15 V V _{CC} = 600 V	T _j = 150 °C		18.5		mJ
R _{th(j-c)}	per diode				0.14	K/W
R _{th(c-s)}	per diode (λ _{grease} =0.81 W/(m*K))			0.047		K/W
Module						
L _{CE}				15		nH
R _{CC'+EE'}	measured per switch	T _C = 25 °C		0.55		mΩ
		T _C = 125 °C		0.85		mΩ
R _{th(c-s)1}	calculated without thermal coupling			0.0109		K/W
R _{th(c-s)2}	including thermal coupling, T _s underneath module (λ _{grease} =0.81 W/(m*K))			0.017		K/W
M _s	to heat sink M6		3		5	Nm
M _t		to terminals M6	2.5		5	Nm
					-	
w					325	g

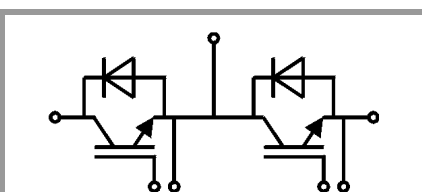

GB

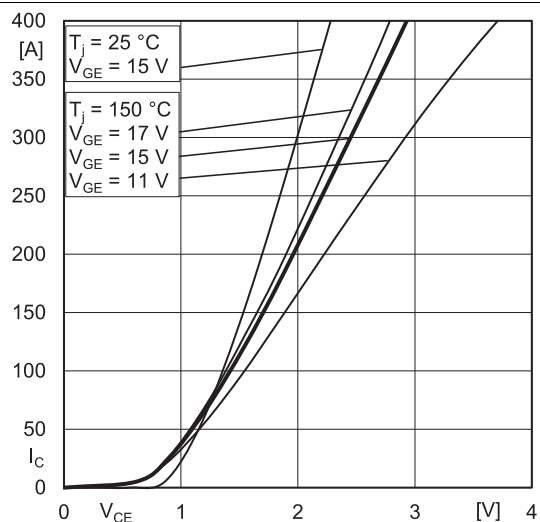


Fig. 1: Typ. output characteristic, inclusive $R_{CC'+EE'}$

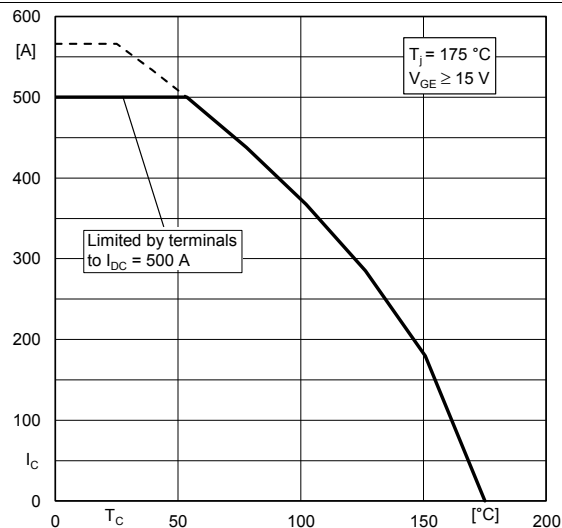


Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

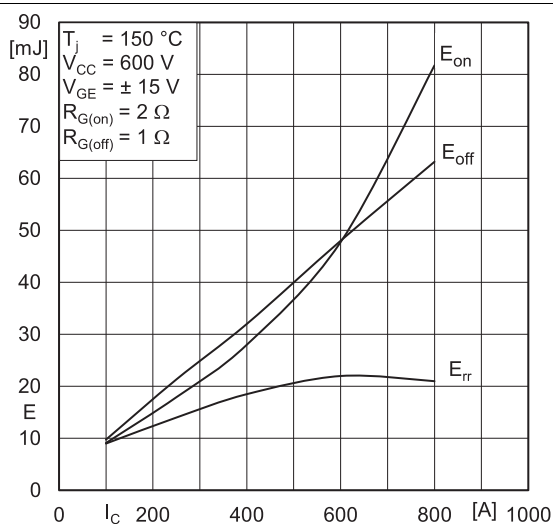


Fig. 3: Typ. turn-on /-off energy = $f(I_C)$

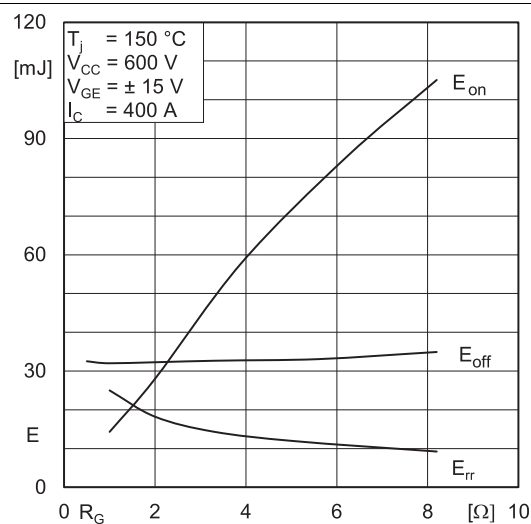


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

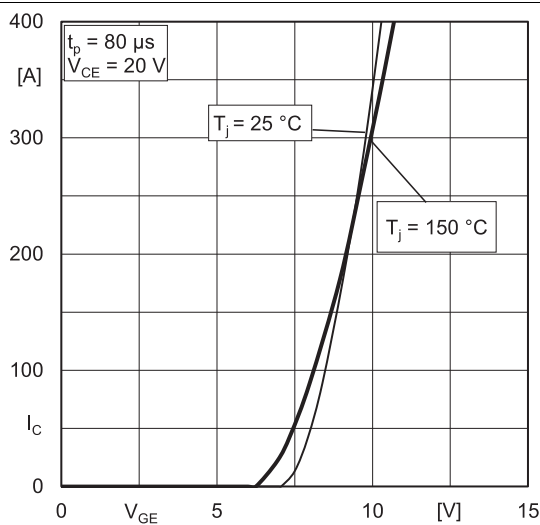


Fig. 5: Typ. transfer characteristic

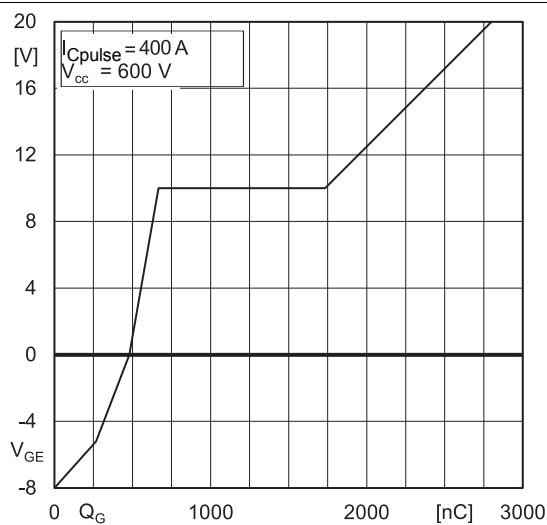


Fig. 6: Typ. gate charge characteristic

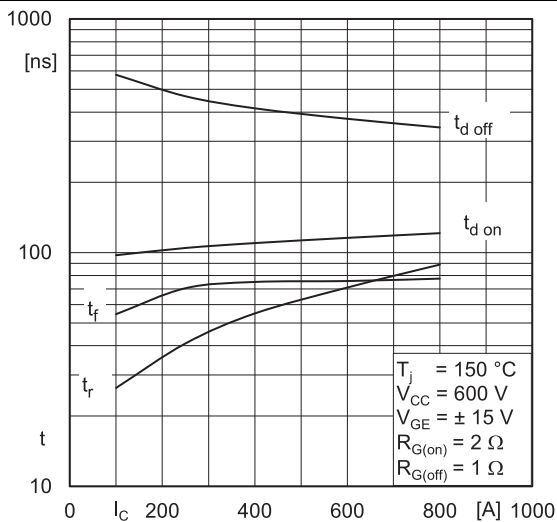


Fig. 7: Typ. switching times vs. I_C

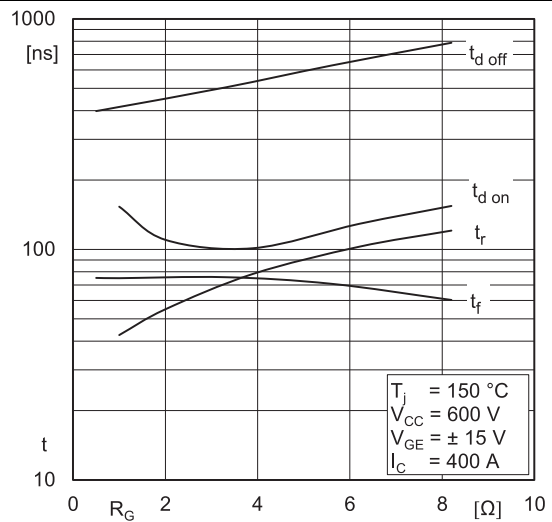


Fig. 8: Typ. switching times vs. gate resistor R_G

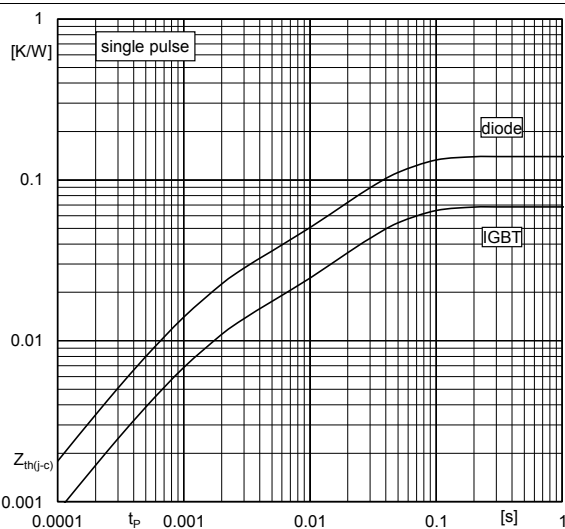


Fig. 9: Transient thermal impedance

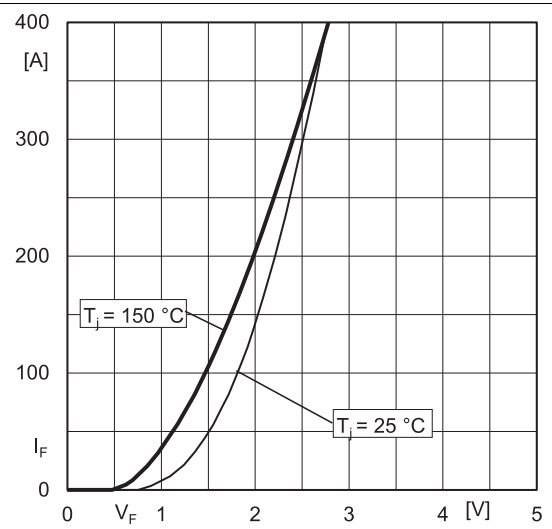


Fig. 10: Typ. CAL diode forward charact., incl. $R_{CC'+EE'}$

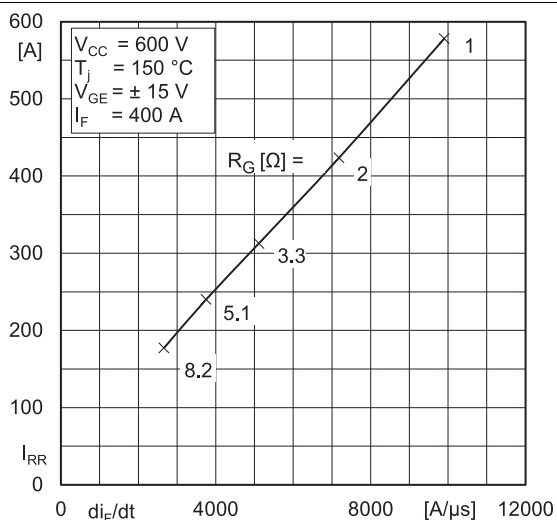


Fig. 11: Typ. CAL diode peak reverse recovery current




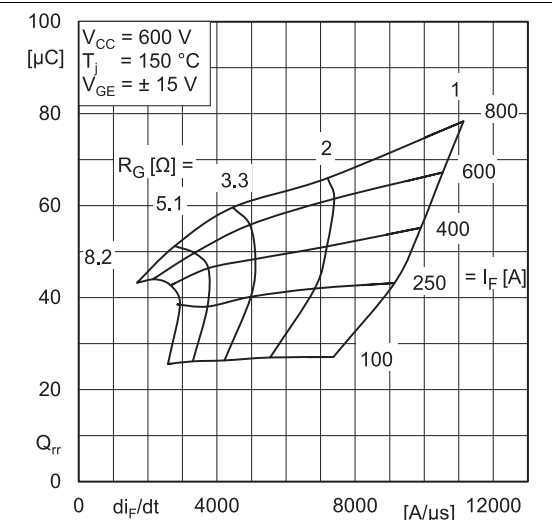


Fig. 12: Typ. CAL diode peak reverse recovery charge

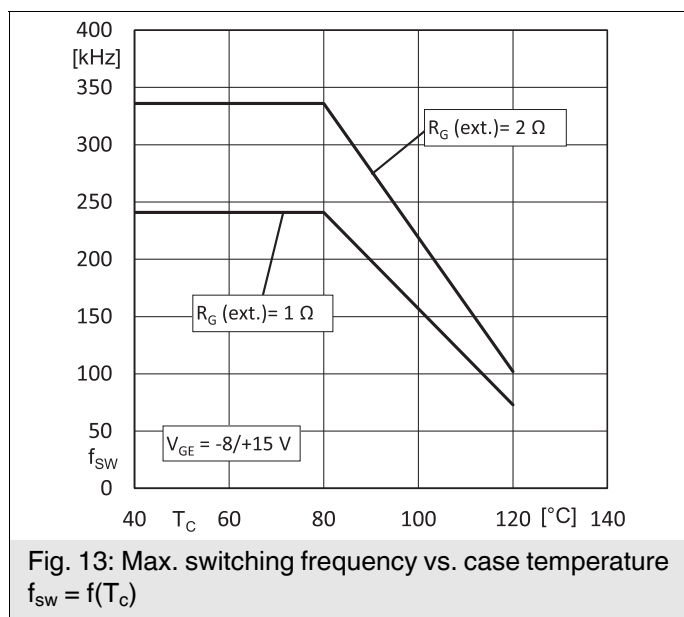

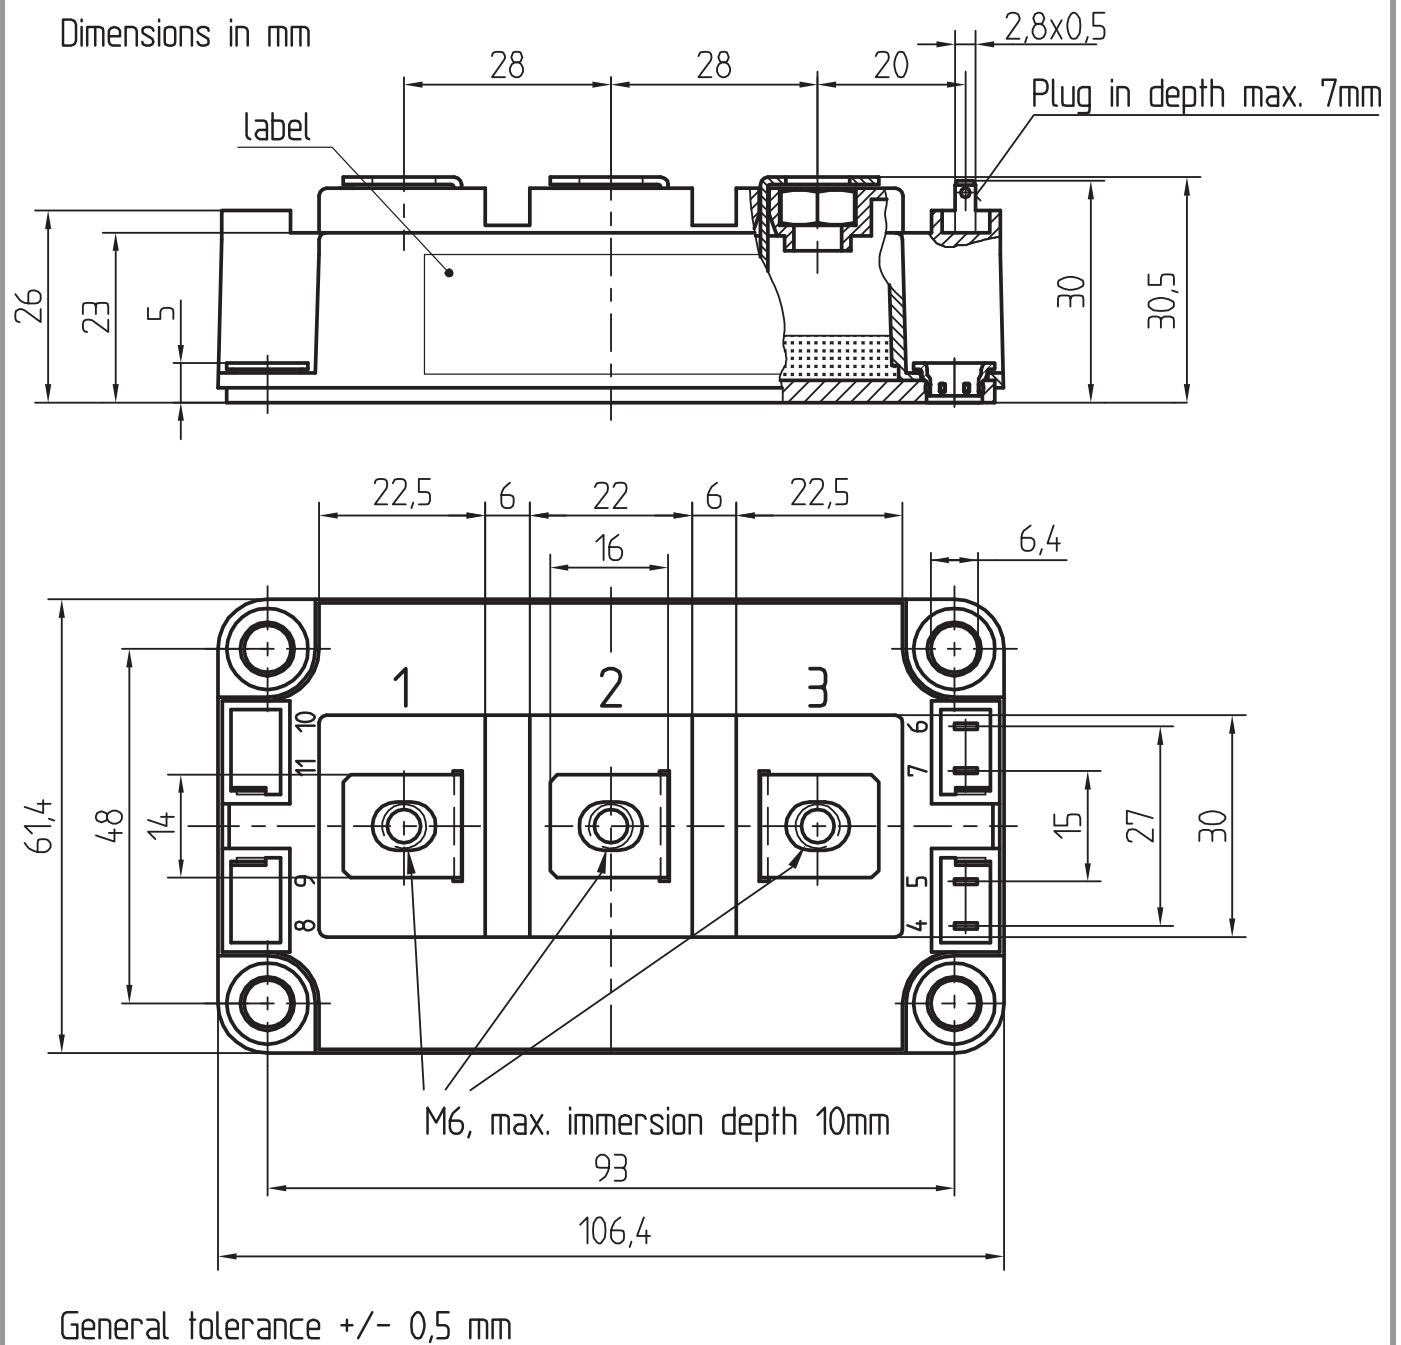

SEMITRANS 3

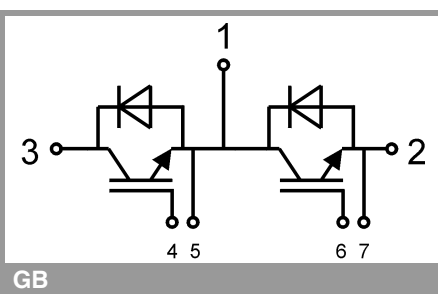

This is an electrostatic discharge sensitive device (ESDS) according to international standard IEC 61340.

***IMPORTANT INFORMATION AND WARNINGS**

The specifications of SEMIKRON products may not be considered as any guarantee or assurance of product characteristics ("Beschaffheitsgarantie"). The specifications of SEMIKRON products describe only the usual characteristics of SEMIKRON products to be expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance. Resulting from this, application adjustments of any kind may be necessary. Any user of SEMIKRON products is responsible for the safety of their applications embedding SEMIKRON products and must take adequate safety measures to prevent the applications from causing any physical injury, fire or other problem, also if any SEMIKRON product becomes faulty. Any user is responsible for making sure that the application design and realization are compliant with all laws, regulations, norms and standards applicable to the scope of application. Unless otherwise explicitly approved by SEMIKRON in a written document signed by authorized representatives of SEMIKRON, SEMIKRON products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury. No representation or warranty is given and no liability is assumed with respect to the accuracy, completeness and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. SEMIKRON does not convey any license under its or a third party's patent rights, copyrights, trade secrets or other intellectual property rights, neither does it make any representation or warranty of non-infringement of intellectual property rights of any third party which may arise from a user's applications. Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the nearest SEMIKRON sales office. This document supersedes and replaces all previous SEMIKRON information of comparable content and scope. SEMIKRON may update and/or revise this document at any time.