


SKT 160

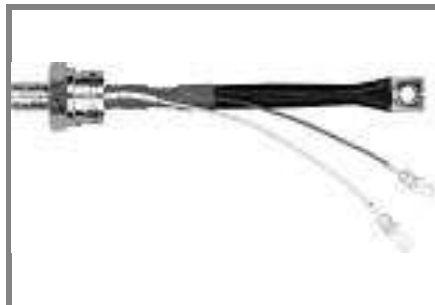

Stud Thyristor

Line Thyristor

SKT 160

Features

- Hermetic metal case with glass insulator
- Threaded stud ISO M16x1,5 or UNF 3/4-16
- International standard case


Typical Applications*

- DC motor control (e. g. for machine tools)
- Controlled rectifiers (e. g. for battery charging)
- AC controllers (e. g. for temperature control)
- Recommended snubber network
e. g. for $V_{VRMS} \leq 400 \text{ V}$:
 $R = 33 \Omega / 13 \text{ W}$, $C = 0,47 \mu\text{F}$







1) Available with UNF thread 3/4-16 UNF2A;
e. g. SKT 160/12E UNF




V_{RSM} V	V_{RRM} , V_{DRM} V	$I_{TRMS} = 280 \text{ A}$ (maximum value for continuous operation) $I_{TAV} = 160 \text{ A}$ (sin. 180; $T_c = 84^\circ\text{C}$)		
500	400	SKT 160/04D		
700	600	SKT 160/06D		
900	800	SKT 160/08D		
1300	1200	SKT 160/12E ¹⁾		
1500	1400	SKT 160/14E		
1700	1600	SKT 160/16E ¹⁾		



Symbol	Conditions	Values	Units
I_{TAV}	sin. 180; $T_c = 100 (85)^\circ\text{C}$;	116 (158)	A
I_D	K1,1; $T_a = 45^\circ\text{C}$; B2 / B6	110 / 150	A
	K0,55; $T_a = 45^\circ\text{C}$; B2 / B6	170 / 240	A
I_{RMS}	K0,55; $T_a = 45^\circ\text{C}$; W1C	190	A
I_{TSM}	$T_{vj} = 25^\circ\text{C}$; 10 ms	4300	A
	$T_{vj} = 130^\circ\text{C}$; 10 ms	3750	A
i^2t	$T_{vj} = 25^\circ\text{C}$; 8,35 ... 10 ms	92500	A ² s
	$T_{vj} = 130^\circ\text{C}$; 8,35 ... 10 ms	70000	A ² s
V_T	$T_{vj} = 25^\circ\text{C}$; $I_T = 500 \text{ A}$	max. 1,75	V
$V_{T(TO)}$	$T_{vj} = 130^\circ\text{C}$	max. 1	V
r_T	$T_{vj} = 130^\circ\text{C}$	max. 1,5	m Ω
I_{DD} ; I_{RD}	$T_{vj} = 130^\circ\text{C}$; $V_{RD} = V_{RRM}$; $V_{DD} = V_{DRM}$	max. 50	mA
t_{gd}	$T_{vj} = 25^\circ\text{C}$; $I_G = 1 \text{ A}$; $di_G/dt = 1 \text{ A}/\mu\text{s}$	1	μs
t_{gr}	$V_D = 0,67 \cdot V_{DRM}$	2	μs
$(di/dt)_{cr}$	$T_{vj} = 130^\circ\text{C}$	max. 100	A/ μs
$(dv/dt)_{cr}$	$T_{vj} = 130^\circ\text{C}$; SKT ...D / SKT ...E	max. 500 / 1000	V/ μs
t_q	$T_{vj} = 130^\circ\text{C}$;	120	μs
I_H	$T_{vj} = 25^\circ\text{C}$; typ. / max.	150 / 250	mA
I_L	$T_{vj} = 25^\circ\text{C}$; $R_G = 33 \Omega$; typ. / max.	300 / 600	mA
V_{GT}	$T_{vj} = 25^\circ\text{C}$; d.c.	min. 3	V
I_{GT}	$T_{vj} = 25^\circ\text{C}$; d.c.	min. 200	mA
V_{GD}	$T_{vj} = 130^\circ\text{C}$; d.c.	max. 0,25	V
I_{GD}	$T_{vj} = 130^\circ\text{C}$; d.c.	max. 10	mA
$R_{th(j-c)}$	cont.	0,16	K/W
$R_{th(j-c)}$	sin. 180	0,18	K/W
$R_{th(j-c)}$	rec. 120	0,2	K/W
$R_{th(c-s)}$		0,03	K/W
T_{vj}		- 40 ... + 130	$^\circ\text{C}$
T_{stg}		- 55 ... + 150	$^\circ\text{C}$
V_{isol}		-	V~
M_s	to heatsink	30	Nm
a		5 * 9,81	m/s ²
m	approx.	250	g
Case		B 6	

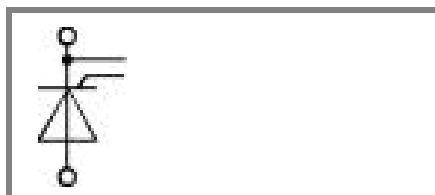

SKT

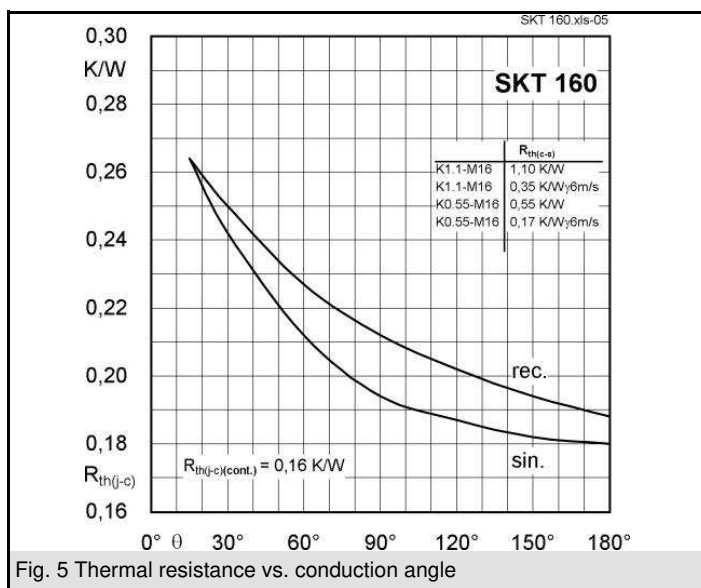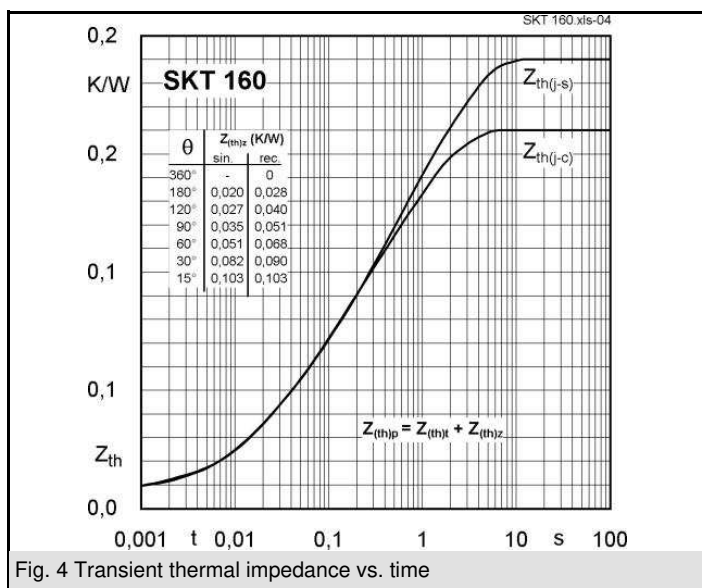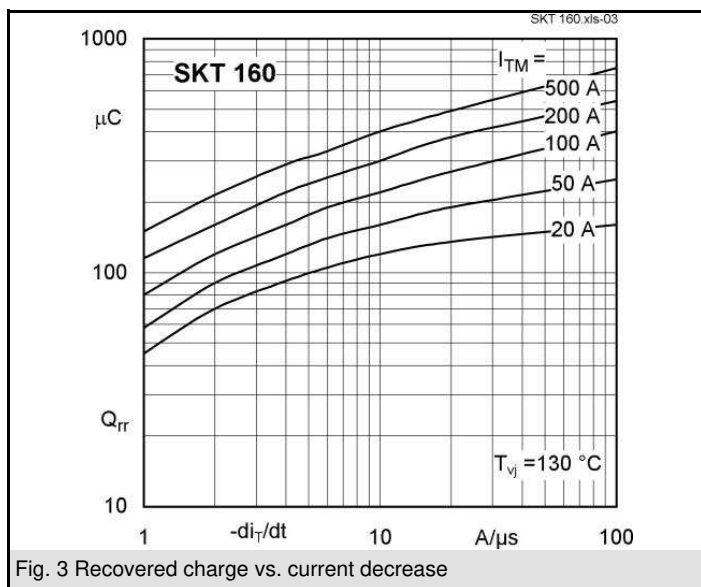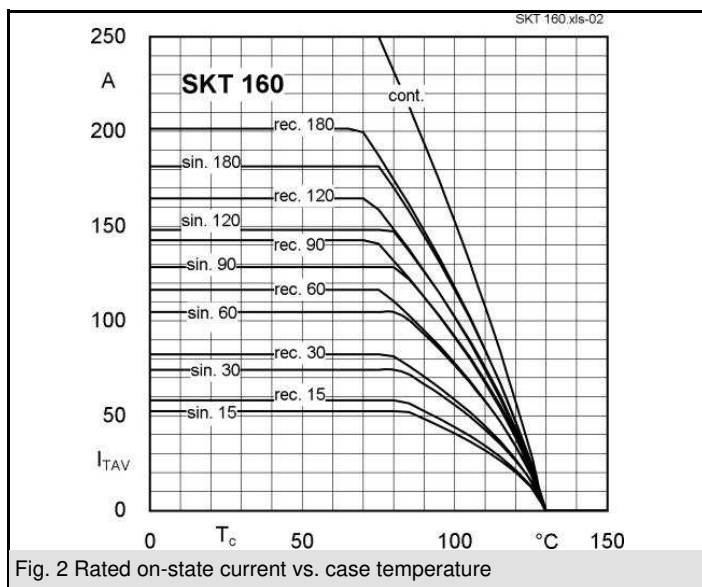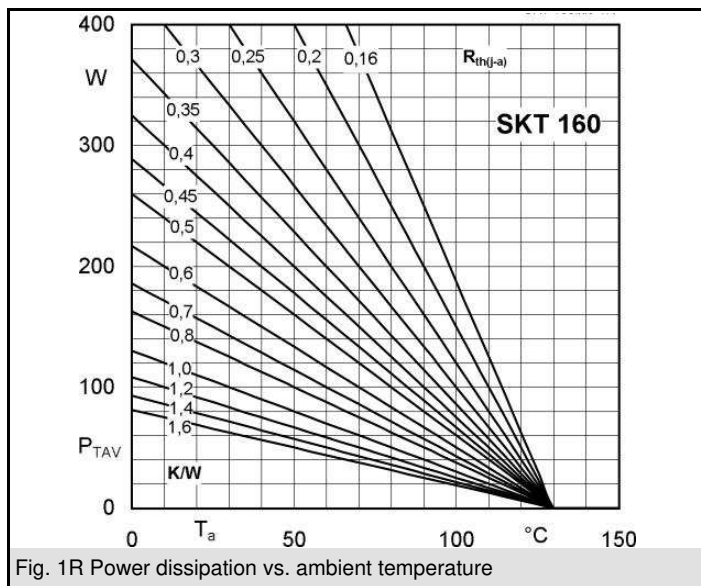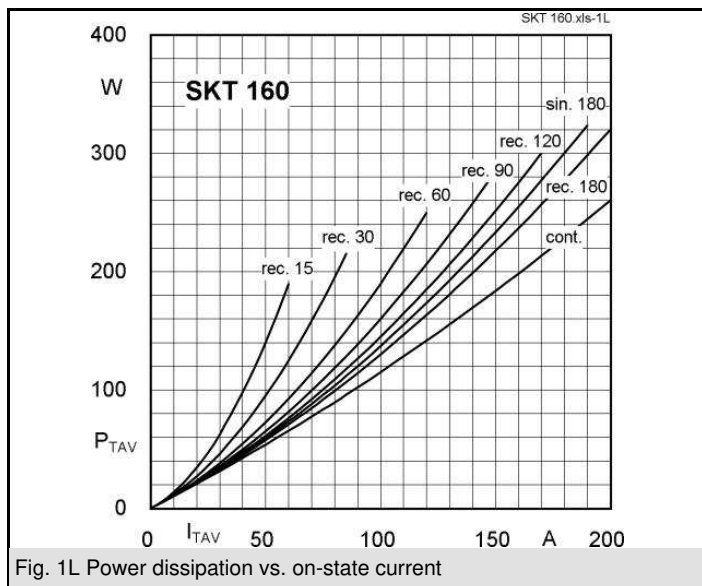

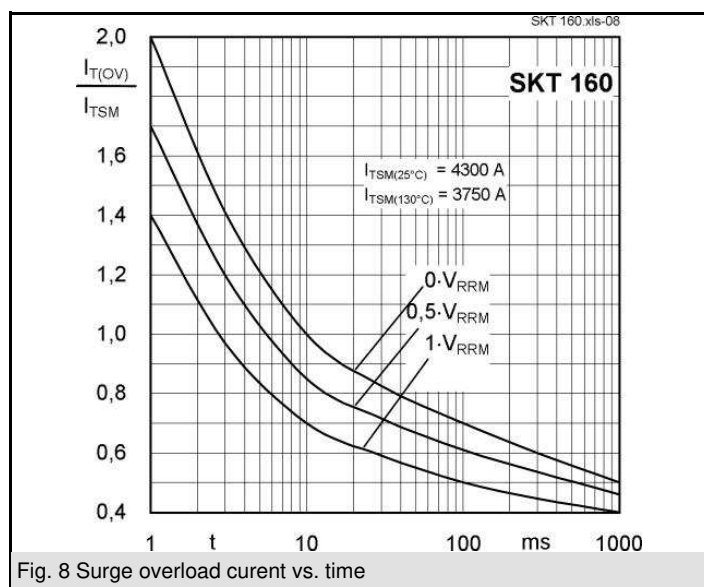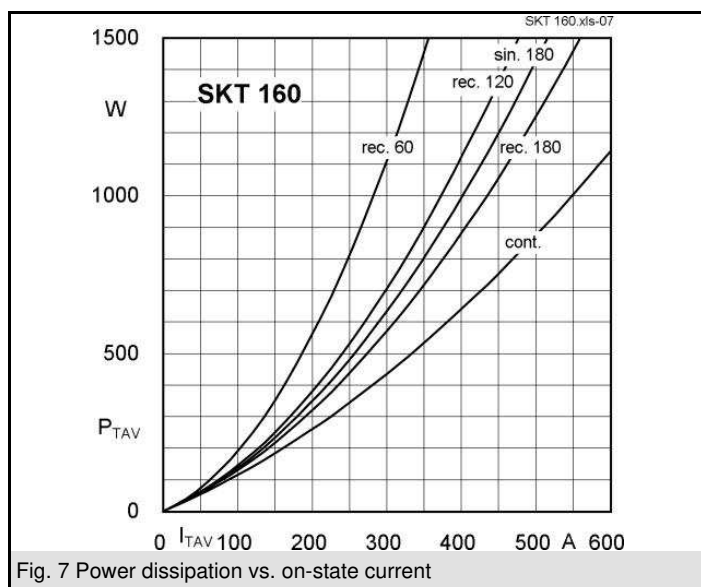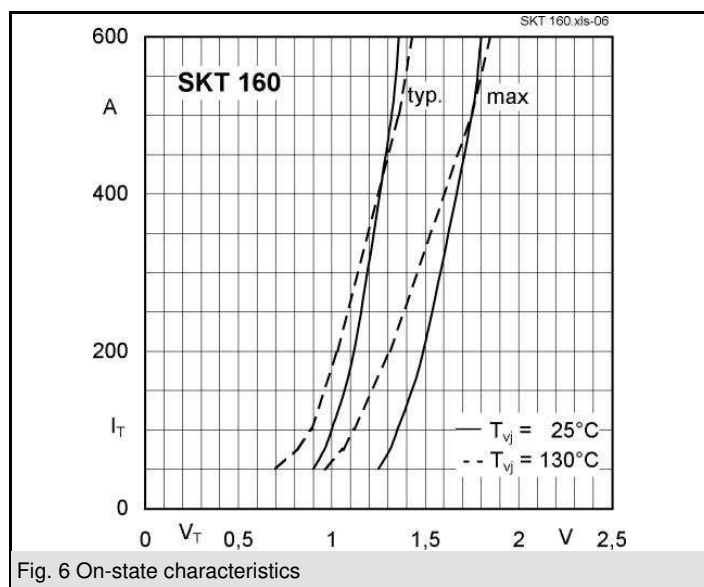

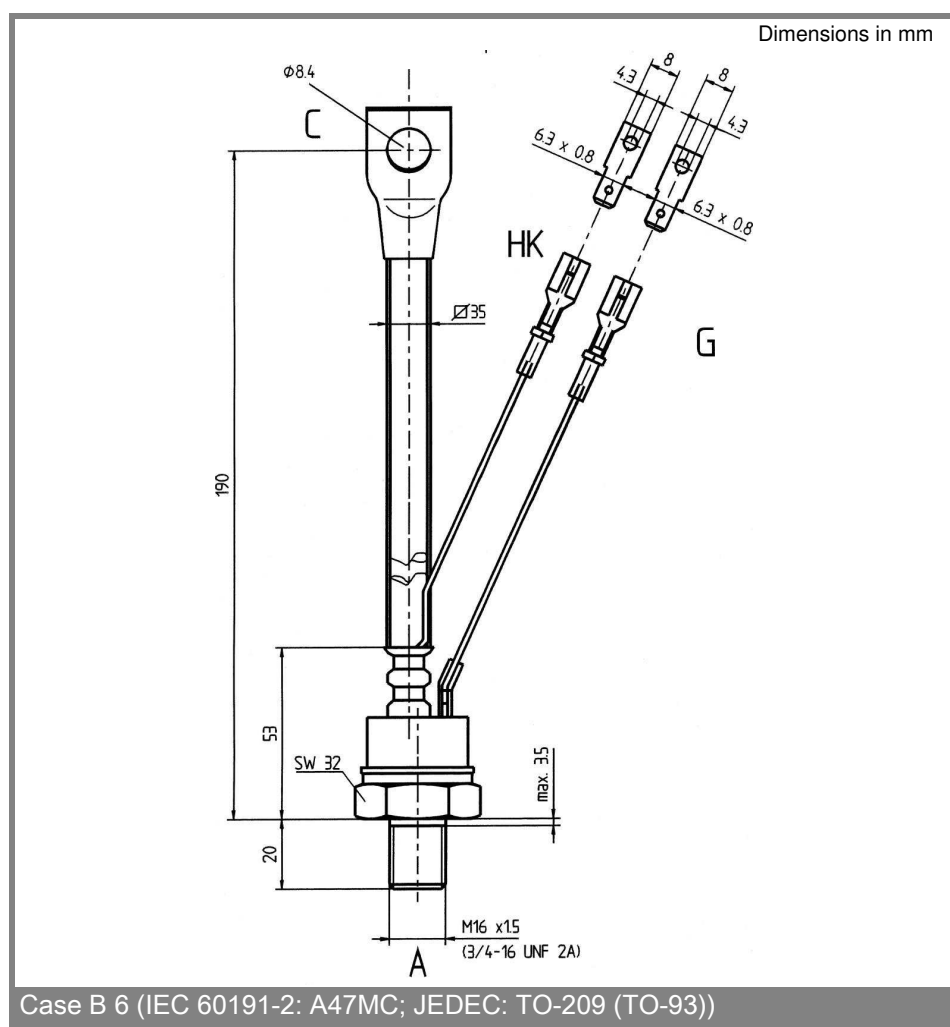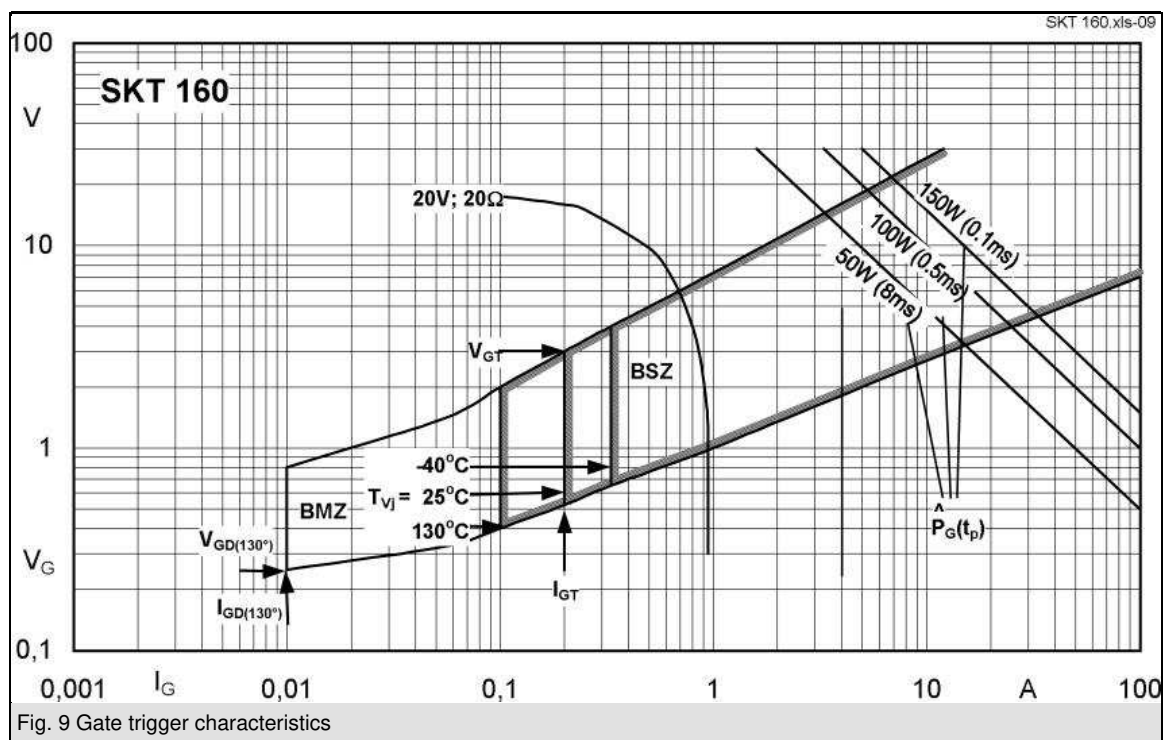

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON

products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.