



# New EU legislation promotes hydronic balancing




In 2024, the EU adopted the **Energy Performance of Buildings Directive (EPBD)** to renovate existing buildings, enhance new construction quality, save energy and improve comfort.

The Directive introduces **new and important legal requirements related to hydronic balancing**, which will certainly accelerate the deployment of these technologies in the market.

## What's new?

### Installing hydronic balancing is now a legal requirement

- The EPBD<sup>1</sup> requires **hydronic balancing for systems in new buildings, and in existing buildings when replacing the heat or cooling generator.**
- When optimizing the hydronic circuit, typical or average operating conditions will need to be considered.
- Since 2025, non-residential buildings with HVAC systems over 290kW must be equipped with a Building Automation and Control System (BACS). From 2030, **non-residential buildings** with HVAC systems over 70kW will need to meet the same requirement.
- As solutions for temperature control and variable flow circuits are becoming increasingly common in multi-family and commercial buildings, **dynamic hydronic balancing technologies are best suited to comply** with the Directive in most cases.

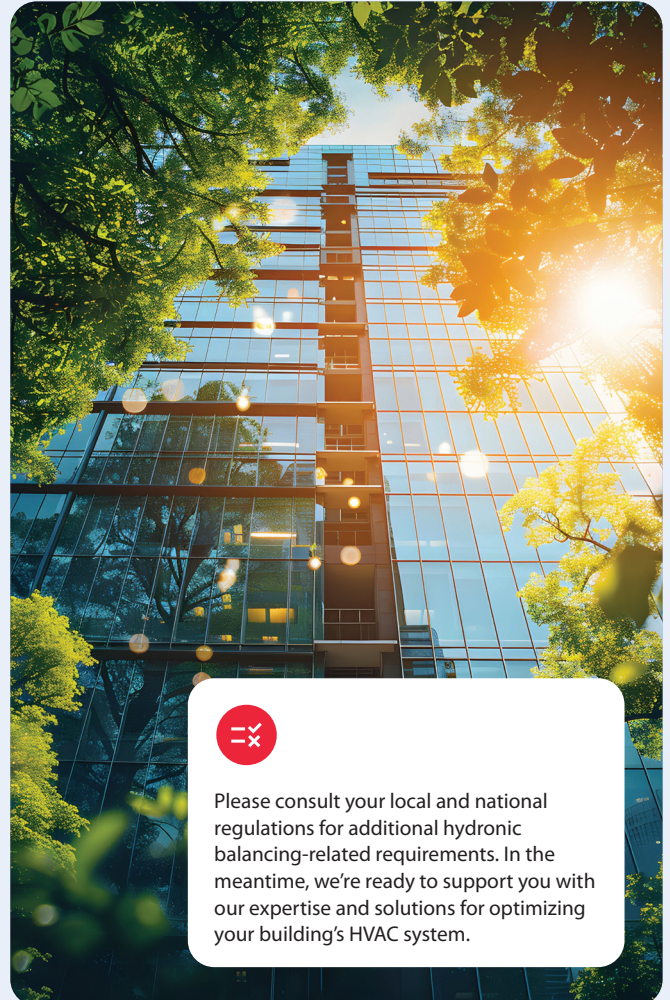

Please consult your local and national regulations for additional hydronic balancing-related requirements. In the meantime, we're ready to support you with our expertise and solutions for optimizing your building's HVAC system.



## Benefits go beyond compliance

- **Over 80% of all existing heating systems have an immense potential for optimization.** Hydronic balancing ensures the optimal flow distribution in a heating system, which means that the right amount of water is available in the right place at the right time.
- This enables **energy savings of up to 38%**, optimizes heat/cooling generator function, reduces water pump usage and greatly improves thermal comfort for users.

<sup>1</sup>For further information on the Energy Performance of Buildings Directive (EPBD), please see <https://eur-lex.europa.eu/eli/dir/2024/1275/oj/eng>, in particular art. 13.1 and 13.3.

# Find the right solution

- For **small or single-family housing**, **static pre-balancing combined with automatic flow control** based on room temperature gives the best results for underfloor heating in existing buildings, due to the inertia of the system. The necessary components for this are easy to retrofit.
- For radiator systems in **single-, multi-family or commercial buildings**, the combination of **dynamic balancing and automation** offers the greatest **optimization potential**, both in new and existing buildings.
- In **large-scale systems** with more than 20 radiators or heating circuits, **pressure-independent valves must always be used on the radiators or in the risers**, to guarantee reliable temperature-based automatic control.

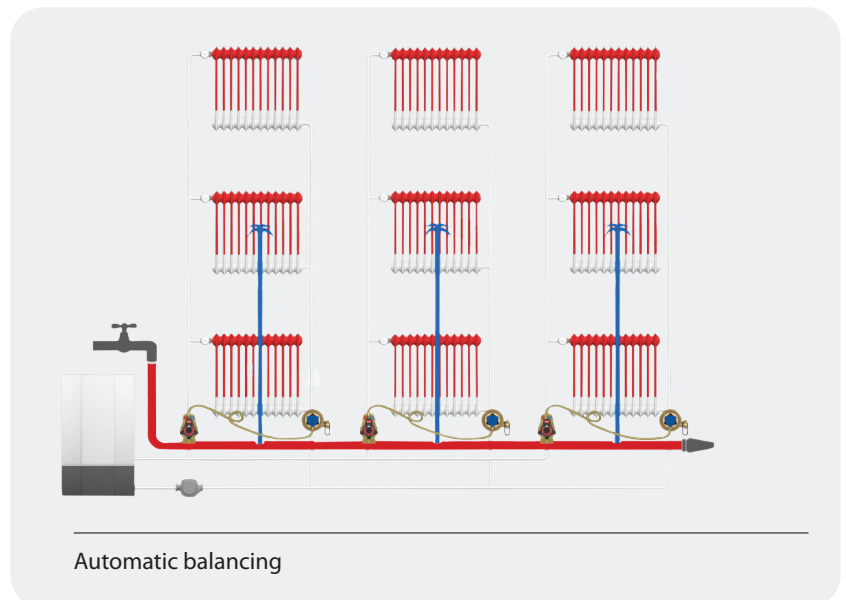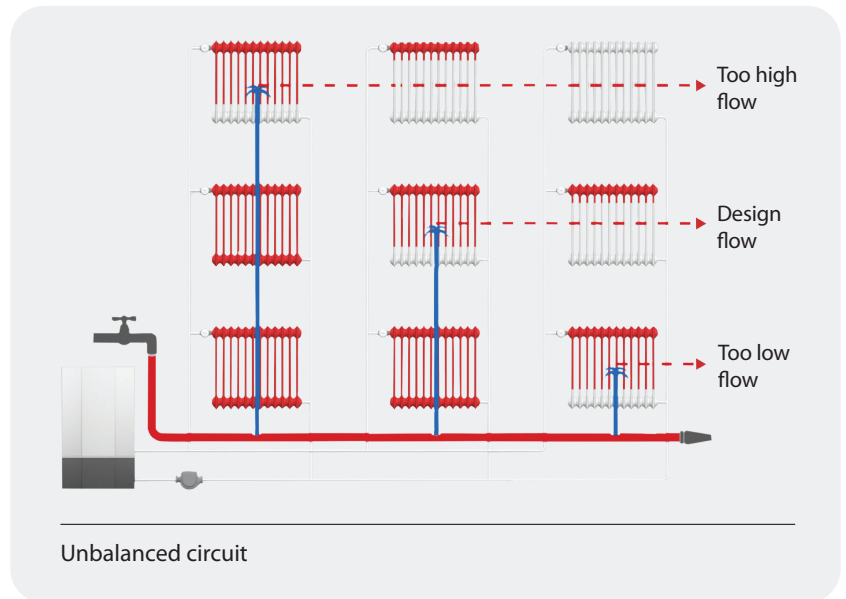

## How we can support you

### Energy-efficient technologies for hydronic balancing projects



Differential pressure control valves & actuators:



Radiator valves:



Electronic radiator thermostats:



Hydronic floor heating:





# Find out more about hydronic balancing



Find out more about  
hydronic balancing



Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.