



Hermetic receiver filter drier

DMC / DCC

ELIMINATOR®, combined receivers and filter driers used in small hermetic refrigeration systems

Description

DMC and DCC are combined receivers and filter driers for use in small hermetic refrigeration systems.

Under operating conditions where the condenser cannot contain the total quantity of refrigerant, a receiver might be necessary. This extra receiver capacity can be provided by using a DCC or a DMC combined receiver and filter drier.

ELIMINATOR® type DMC driers are designed for applications requiring the highest moisture capacity and acid adsorption capacity. Available with solder (cu-plated steel) connections.


Features & benefits

- The core - type DMC is 100% Molecular sieve core
 - High drying capacity minimizing the risk of acid formation (hydrolysis)
 - Recommended for use with HFO, HC, HFC and HCFC refrigerants
 - Will not deplete oil additives
- The core - type DCC is 80% molecular sieve with 20% activated alumina
 - Recommended for use with HFO, HC, HFC and HCFC refrigerants
 - Perfect core blend for A/C systems that operate at high condensing temperatures and require high drying capacity
- The shell is PED/UL approved for PS 42 bar
 - Available with solder (cu-plated steel connectors)
 - Corrosion resistant powder-painted finish
- The filter is combination of filter drier and receiver
 - Available in sizes 4 – 40 cubic inches
 - High drying capacity at high and low liquid temperatures
 - Space-saving
 - Fast installation
 - 25 µm / 0.001 inch filter provides high retention with minimal pressure drop
 - Thermally stable up to 120 °C

Ordering

Product code numbers

Figure: DMC and DCC

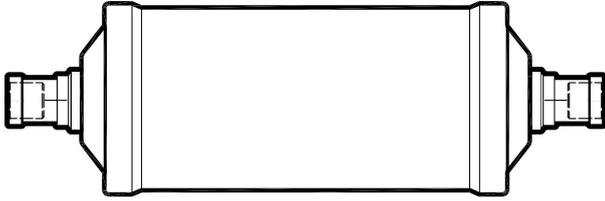

Type DMC

Type	Connection	Industrial pack for OEM only		Multi pack	
		Qty.	Code no.	Qty.	Code no.
DMC 0432s	6 mm	16	023Z7012	24	023Z7019
DMC 0732s	6 mm	16	023Z7013	24	023Z7020
DMC 0732s	¼ in	16	023Z7045	–	–
DMC 2032s	6 mm	10	023Z7007	18	023Z7021
DMC 2032s	¼ in	10	023Z7008	18	023Z7022
DMC 2032.5s	⅝ in	10	023Z7044	–	–
DMC 2033s	10 mm	10	023Z7014	18	023Z7023
DMC 2033s	⅜ in	10	023Z7009	18	023Z7024
DMC 2034s	12 mm	10	023Z7015	–	–
DMC 2034s	½ in	10	023Z7010	18	023Z7026
DMC 40163s	10 mm	6	023Z7016	8	023Z7027
DMC 40163s	⅜ in	6	023Z7017	8	023Z7028
DMC 40164s	12 mm	6	023Z7018	8	023Z7029
DMC 40164s	½ in	6	023Z7011	8	023Z7030

Type DCC

Type	Connection	Industrial pack for OEM only	
		Qty.	Code no.
DCC 0432s	6 mm	16	023Z7000
DCC 0732s	6 mm	16	023Z7001
DCC 2032s	6 mm	10	023Z7002
DCC 2032s	¼ in	10	023Z7003
DCC 2033s	10 mm	10	023Z7004

Product details

General data

Table: Surface and volume

Filter	Solid core surface	Solid core volume	Filter drier volume (shell volume)	Filter drier volume (net volume)
	[cm ²]	[cm ³]	[l]	[l]
DMC / DCC 04	83	53	0.14	0.09
DMC / DCC 07	83	53	0.19	0.14
DMC / DCC 20	83	53	0.35	0.30
DMC 40	220	234	0.77	0.54

Table: Acid capacity

Filter	Acid capacity
	[g] ⁽¹⁾
DCC 04	0.71
DCC 07	0.71
DCC 20	0.71

⁽¹⁾ Adsorption capacity of oleic acid at 0.05 TAN (Total Acid Number).

Selection

Table: Type selection is made considering the application

Refrigerant and oil types		DCC	DMC
Refrigerant	HFO	Recommended	Recommended
	HC ⁽¹⁾	Recommended	Recommended
	HFC	Recommended	Recommended
	HCFC	Recommended	Recommended
Oil	Mineral or AB	Recommended	Recommended
	POE or PAG, pure	Recommended	Recommended
	POE or PAG, with additives	Not recommended ⁽²⁾	Recommended

⁽¹⁾ Only solder versions (cu-plated / pure copper) and connection sizes below 25 mm are approved for flammable refrigerants now

⁽²⁾ DCC Hermetic filter driers contain activated alumina, which is a polar material used for acid adsorption. Many oil additives are also polar substances and can be adsorbed by the activated alumina, rendering them useless, and reducing the drier's acid capacity, though this is not harmful to the system

Selection example

Select the appropriate type (DMC or DCC) based on refrigerant and oil type. Then select the drier size based on the adsorption and liquid capacity required.


- Amount of charge: 4 kg R134a at tL = 24 °C to dry 4 kg R134a at 24 °C from 1050 to 60 ppm moisture, a DMC 20 is necessary
- Cooling capacity: Qe = 15 kW to obtain a mass flow corresponding to 15 kW cooling capacity with a DMC 0 filter drier, a 3/8 inch connection must be chosen. Larger connections can be chosen in accordance with the liquid line dimension
- Result DMC 2033s or DMC 2034s can be used

If the initial moisture content is very small or a planned change of the filter drier is considered, a smaller filter drier size can be chosen. During selection consider amount of the refrigerant intended to keep in a receiver part of the filter.

Type	Drying capacity [kg] refrigerant ¹⁾												Liquid capacity [kW] ²⁾						Max. Working Pressure PS [bar]
	R134a		R404A		R507		R22		R407C		R410A		R134a	R404A	R507	R22	R407C	R410A	
	[°C]																		
	24	52	24	52	24	52	24	52	24	52	24	52							
DMC 0432s							4.9	4.6	4.9	4.5	4.4	4.1	7.71	5.52	5.26				
DMC 2032s	4.9	4.6	5.2	5.0	5.3	4.9	4.9	4.6	4.9	4.5	4.4	4.1			5.36	8.44	7.96	8.21	
DMC 2033s	4.9	4.6	5.2	5.0	5.3	4.9	4.9	4.6	4.9	4.5	4.4	4.1	15.69	11.17	10.84	17.14	16.14	16.61	
DMC 2034s	4.9	4.6	5.2	5.0	5.3	4.9	4.9	4.6	4.9	4.5	4.4	4.1	32.65	25.73	25.05	37.42	35.85	38.68	
DMC 40163s	25.6	24.2	27.5	26.1	28.0	25.9	25.9	24.0	25.6	23.7	23.3	21.5	15.69	11.17	10.84	17.14	16.14	16.61	
DMC 40164s								25.6	23.7	23.3	21.5	15.69	25.73	25.05	37.42	35.85	38.68		

Design

Figure: DMC and DCC

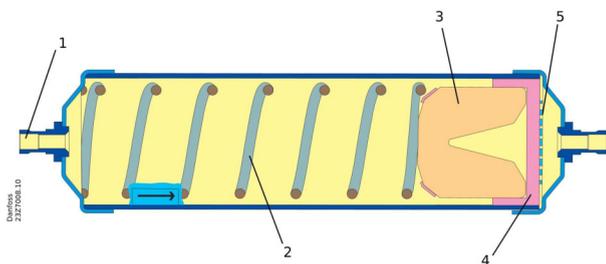

1	Inlet
2	Spring
3	Solid core
4	Polyester mat
5	Perforated plate

Capacity

Table: Drying capacity, type DMC

Type	Drying capacity [kg] refrigerant ⁽¹⁾												Max. Working Pressure PS [bar]
	R134a		R404A		R507		R22		R407C		R410A		
	[°C]												
	24	52	24	52	24	52	24	52	24	52	24	52	
DMC 0432s	6.4	5.8	6.7	6.3	7	6.3	6.4	5.9	6.2	5.7	5.8	5.1	42
DMC 0732s	6.4	5.8	6.7	6.3	7	6.3	6.4	5.9	6.2	5.7	5.8	5.1	42
DMC 2032s	6.4	5.8	6.7	6.3	7	6.3	6.4	5.9	6.2	5.7	5.8	5.1	42
DMC 2033s	6.4	5.8	6.7	6.3	7	6.3	6.4	5.9	6.2	5.7	5.8	5.1	42
DMC 2034s	6.4	5.8	6.7	6.3	7	6.3	6.4	5.9	6.2	5.7	5.8	5.1	42
DMC40163s	28.2	25.8	29.4	27.8	30.8	27.7	28.3	26.1	27.4	25.3	25.6	22.7	42
DMC40164s	28.2	25.8	29.4	27.8	30.8	27.7	28.3	26.1	27.4	25.3	25.6	22.7	42

⁽¹⁾ Drying capacity is based on following moisture content test standards before and after drying:

R134a: 1050 – 50 ppm W

R404A, R507: 1020 – 50 ppm W

R407C: 1020 – 50 ppm W

R410A: 1050 – 50 ppm

In accordance with ARI 710-2004

For technical data on other refrigerants, please contact your Danfoss sales representative

Table: Liquid capacity, type DMC

Type	Liquid capacity [kW] ⁽²⁾						Max. Working Pressure PS [bar]
	R134a	R404A	R507	R22	R407C	R410A	
DMC 0432s	6.3	4.4	4.3	6.8	6.4	6.5	42
DMC 0732s	6.3	4.4	4.3	6.8	6.4	6.5	42
DMC 2032s	6.3	4.4	4.3	6.8	6.4	6.5	42
DMC 2033s	17.9	12.6	12.2	19.5	18.3	18.6	42
DMC 2034s	24.2	17	16.5	26.3	24.8	25.2	42
DMC 40163s	22.8	15.6	15.2	24.2	22.8	23.1	42
DMC 40164s	28.0	19.7	19.1	30.6	28.7	29.2	42

⁽²⁾ Given in accordance with ARI 710-2004 for
 te = -15 °C
 tc = 30 °C
 Δp = 0.07 bar

For technical data on other refrigerants, please contact your Danfoss sales representative

Table: Drying capacity, type DCC

Type	Drying capacity [kg] refrigerant ⁽³⁾												Max. Working Pressure PS [bar]
	R134a		R404A		R507		R22		R407C		R410A		
	[°C]												
	24	52	24	52	24	52	24	52	24	52	24	52	
DCC0432s	4.9	4.5	5.1	4.9	5.4	4.8	4.9	4.6	4.8	4.4	4.5	4.0	42
DCC0732s	4.9	4.5	5.1	4.9	5.4	4.8	4.9	4.6	4.8	4.4	4.5	4.0	42
DCC2032s	4.9	4.5	5.1	4.9	5.4	4.8	4.9	4.6	4.8	4.4	4.5	4.0	42
DCC2033s	4.9	4.5	5.1	4.9	5.4	4.8	4.9	4.6	4.8	4.4	4.5	4.0	42

⁽³⁾ Drying capacity is based on following moisture content test standards before and after drying:
 R134a: 1050 – 50 ppm W
 R404A, R507: 1020 – 50 ppm W
 R407C: 1020 – 50 ppm W
 R410A: 1050 – 50 ppm W
 R22: 1050 – 60 ppm W
 In accordance with ARI 710-2004

Table: Liquid capacity, type DCC

Type	Liquid capacity [kW] ⁽⁴⁾						Max. Working Pressure PS [bar]
	R134a	R404A	R507	R22	R407C	R410A	
DCC 0432s	6.3	4.4	4.3	6.8	6.4	6.5	42
DCC 0732s	6.3	4.4	4.3	6.8	6.4	6.5	42
DCC 2032s	6.3	4.4	4.3	6.8	6.4	6.5	42
DCC 2033s	17.9	12.6	12.2	19.5	18.3	18.6	42

⁽⁴⁾ Given in accordance with ARI 710-2004 for
 te = -15 °C
 tc = 30 °C
 Δp = 0.07 bar

For technical data on other refrigerants, please contact your Danfoss sales representative

Table: Type codes


Type	Codes	Description
Filter drier	D	Drier
Solid core	M	100% Molecular Sieve core
	C	80% Molecular Sieve / 20% activated alumina
Application	C	Combined filter drier/receiver
Filter housing volume (approx.)	04	4 in ³
	07	7 in ³
	20	20 in ³
	40	40 in ³
Solid core size	03	3 in ³
	16	16 in ³
Connection (filter connection in 1/8 of an inch increments)	2	1/4 in / 6 mm
	3	3/8 in / 10 mm
	4	1/2 in / 12 mm
Connection type	s	Solder connection (cu-plated steel connectors)

D	Filter drier
M	Solid core
C	Application
20	Filter housing volume (approx.)
03	Solid core size
2	Connection (filter connection in 1/8 of an inch increments)
s	Connection type

Pressure and temperature data

Temperature range: -40 – 70 °C (-40 – 158 °F)

Figure: Solder connection (cu-plated steel connectors)

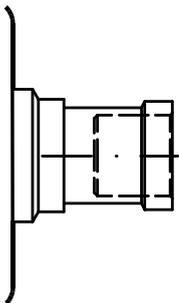

Dimensions

Figure: Solder connection (cu-plated steel connectors)

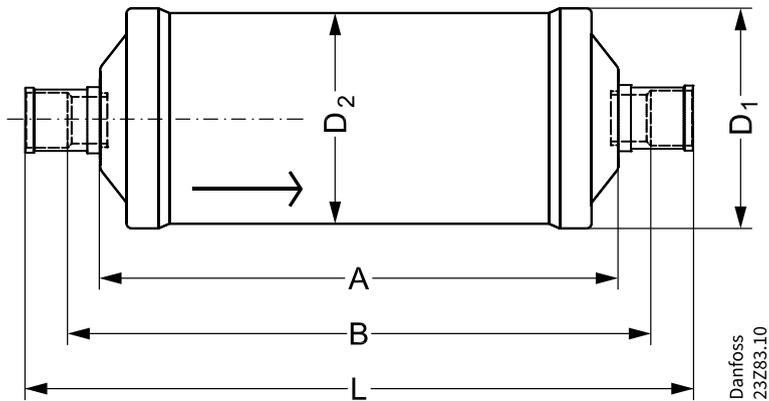


Table: Dimensions and Weight of DMC/DCC

Type	L	A	B	D ₁	D ₂	Net weight
	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
DMC / DCC 0432s	114	82	99	58	54	0.40
DMC / DCC 0732s	140	108	125	58	54	0.48
DMC / DCC 2032s	222	190	206	58	54	0.72
DMC / DCC 2033s	228	190	208	58	54	0.73
DMC / DCC 2034s	232	190	210	58	54	0.74
DMC 40163s	237	199	219	80	76	1.18
DMC 40164s	241	199	221	80	76	1.19

Certificates, declarations and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

When you click on the link you will be directed to the latest version of the 'Declaration of Conformity'. Products developed and sold before this date of issue conform to the directives/standards in force at the time of their sale.

Approval type	Title	Certification body	Approval topic
Manufacturer's Declaration	Danfoss MD 023U9601.AI	Danfoss	Explosive, EU RoHS, PED, Pressure, ATEX
Mechanical Safety Certificate	UL SA6398 19980330 US-CA	UL - Underwriters Laboratories inc.	
Manufacturer's Declaration	Danfoss MD 023Z9610.AA	Danfoss	China RoHS
Pressure Safety Certificate	LLC CDC EURO-TYSK UA.TR.089.1015.07-22	LLC CDC EURO TYSK - Ukraine	Pressure
EU Declaration	Danfoss EU-declaration 023Z9626.AA	Danfoss	PED
EU Declaration	Eurocert 10.07.12440	Danfoss	PED
Export Control Declaration	Filter Driers 023U and 023Z	Danfoss	
UA Declaration	Danfoss UA 2023-01-10 Filters PL01	Danfoss	PED, Pressure

Note:

Only solder versions (cu-plated / pure copper) and connection sizes below 25 mm are approved for flammable refrigerants now.

Contact details

Online support

Danfoss offers a wide range of support along with our products, including digital information, software, mobile apps and expert guidance. See the possibilities below.



The Danfoss Design center

Discover the Design Center, our advanced digital platform that streamlines product selection. With integrated tools and enhanced type pages, it's simpler than ever to access product information and documentation, and to select the right products. Check the availability of Danfoss products at partner locations and enjoy seamless transitions from selection to purchase with our basket-to-basket functionality. Whether you're buying from our distributors or directly from the Product Store, the Design Center simplifies your experience. Learn more at: designcenter.danfoss.com.



The Danfoss product store

The Danfoss Product Store is a one-stop shop available 24/7 for our customers, no matter where you are in the world or what area of industry you work in. Browse our catalog, check product details and documentation, view your prices and product availability, and quickly finalize your purchase. Start browsing at: store.danfoss.com.



Danfoss Partner Portal/Product Data tool

Designed to support you with easy access to product data extracts, essential resources, tools, and information. The Partner Portal provides a centralized hub for product documentation, training materials, marketing assets, and technical support, ensuring you have everything you need to succeed and grow your business with Danfoss. The Partner Portal is available 24/7 at: partner.danfoss.com and is ready to support your business.



Find technical documentation

Find technical documentation you need to get your project up running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more. Start searching now at: documentation.danfoss.com.



Danfoss Learning

Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications industry topics, and trends that will help you do your job better. Find your local Danfoss website here: learning.danfoss.com.



Get local information and support

Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert - all in your own language. Find your local Danfoss website here: danfoss.com.

Danfoss A/S

Climate Solutions . danfoss.com . +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues description, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the products. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.
