



Micro Plate Heat Exchanger

D118 Evaporators save you time and money

Latest micro plate technology | Easy installation | 30 or 45 bar design pressure



24/7

ordering from stock


quick and easy deliveries from stock.

Scan the QR code for more
technical- and ordering information



D118 - increased flexibility, increased savings

Micro Plate Heat Exchanger (MPHE)

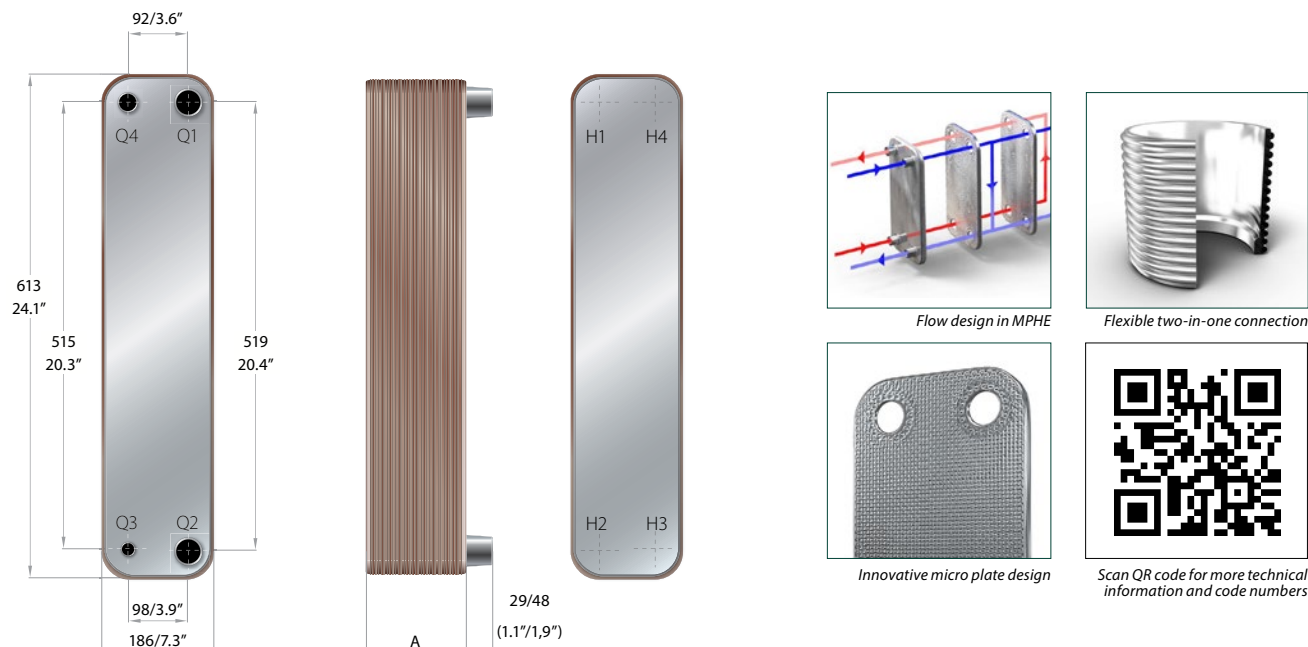

INTRODUCTION

The new Danfoss D118 is an excellent route to increased savings. With a robust and resource-efficient design, the D118 is designed to operate efficiently year after year in a whole range of applications. The innovative D118 channel plate pattern makes it the best heat exchanger on the market, significantly reducing energy consumption and lowering CO₂ emissions. The D118 has a capacity of 20-90 kW and is suitable for evaporators, condensers and one-phase applications. Thanks to the two-in-one connection it is always easier to install. The D118 is the natural choice for any application.

KEY FEATURES

- Standard- and high-pressure designs make it the ideal solution for any application or refrigerant
- Two-in-one connection for easy installation
- With innovative micro plate channel plate pattern for higher heat transfer to minimize weight and refrigerant charge

EASY INSTALLATION

A D118 heat exchanger is always easier to use. Every product is delivered with Danfoss two-in-one connections, which allow both threading and soldering. The universal soldering connections are suitable for both customary/imperial and metric piping.

TECHNICAL DATA

The D118 product is available in these different configurations for evaporators:

- D118-E: Evaporator with refrigerant distributor
- D118L-E: High-pressure Evaporator, approved to 45 bar

| Model: | A (mm/inch) | Min/Max. working temperature: | Max. working pressure: | Hold-up volume: Q1-Q2 / Q3-Q4 | Weight: |
|---------|----------------------------|-------------------------------|------------------------|---|---|
| D118-E | 11.5+1.74xn 0.45+0.07xn | -196 °C / 200 °C | 30 bar 435 psi | (l): 0.151xn/2 / 0.151x(n-2)/2 (ft ³): 0.005xn/2 / 0.005x(n-2)/2 | (kg): 5.95+0.26xn (lb): 13.13+0.57xn |
| D118L-E | 15.5+1.74xn 0.61+0.07xn | 390 °F / -320 °F | 45 bar 650 psi | | (kg): 7.94+0.26xn (lb): 17.53+0.57xn |

STANDARD MATERIALS

Cover plates: AISI 304L
Connections: AISI 304L
Plates: AISI 316L
Brazing filler: Pure copper
Other material combinations are available on request. Please contact your Danfoss sales representative for more information.

THIRD-PARTY APPROVALS

Europe: Pressure Equipment Directive (PED). America: Underwriters Laboratory Inc (UL). The third-party approvals stated are standard for all our products. For details of other existing approvals or to discuss how we can meet your local needs, please contact your Danfoss representative.

TECH SUPPORT

A number of easy-to-use online tools and the advanced heat exchanger software Hexact make it easier than ever to choose the right heat exchanger.

AVAILABILITY

A new logistics set-up with a full standard product range allows fast and reliable off-the-shelf deliveries. To see the full list of available standard products and configurations, use the QR code on the first page or contact your local sales representative.

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.