

# SC12/12G

## Universal Twin Compressor

### R134a

### 220-240V 50Hz

Data Sheet (Replaces CD.44.F6.02)

**General**

Compressor	<b>SC12/12G</b>
Code number	104G8280

**Application**

Application		LBP/HBP
Evaporating temperature range	°C	-35 to 15
Voltage range	V/Hz	198 - 254 /50
Motor type		CSIR
Max. ambient temperature	°C	43
Comp. cooling at ambient temp.	32°C	LBP: F <sub>2</sub> HBP: F <sub>2</sub>
	38°C	LBP: F <sub>2</sub> HBP: F <sub>2</sub>
	43°C	LBP: F <sub>2</sub>
		HBP: F <sub>2</sub>

**Design**

Displacement	cm <sup>3</sup>	2 x 12.87
Oil quantity	cm <sup>3</sup>	1120
Maximum refrigerant charge	g	2200
Free gas vol. in compressor	cm <sup>3</sup>	3020
Weight without electrical equipment	kg	28


**Motor**

Motor size	watt	2 x 315
LRA (rated after 4 sec. UL984) HST*	A	12.6
Cut-in current HST*	A	12.6
Resistance, main and start winding (25°C)	Ω	6.7/11.8
Approvals		EN 60335-2-34




\* Operational current for the second compressor time-delayed.

**Dimensions**

Height	mm	A	249
		B	244
		B1	183
		B2	100
Suction connector	location/I.D. mm	C	12
		C	12
Process connector	location/I.D. mm	D	6.2 ±0.09
Discharge connector	location/I.D. mm	E	6.2 ±0.09
Compressors on a pallet	pcs.		18

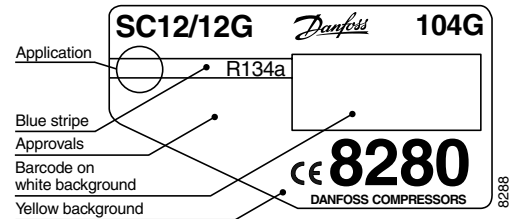

- S = Static cooling normally sufficient
- O = Oil cooling
- F<sub>1</sub> = Fan cooling 1.5 m/s  
(compressor compartment temperature equal to ambient temperature)
- F<sub>2</sub> = Fan cooling 3.0 m/s necessary

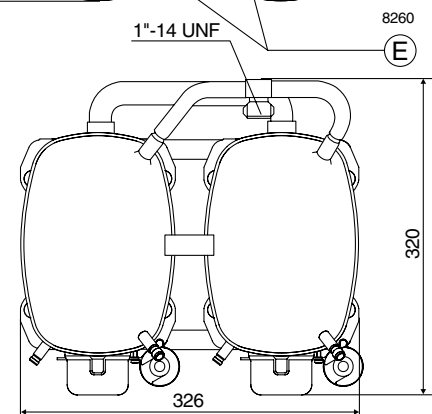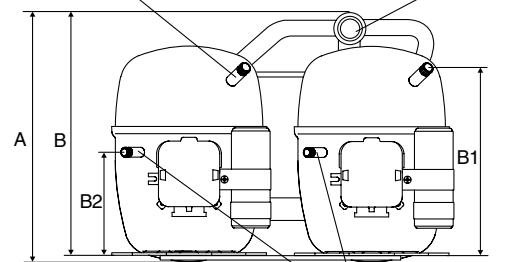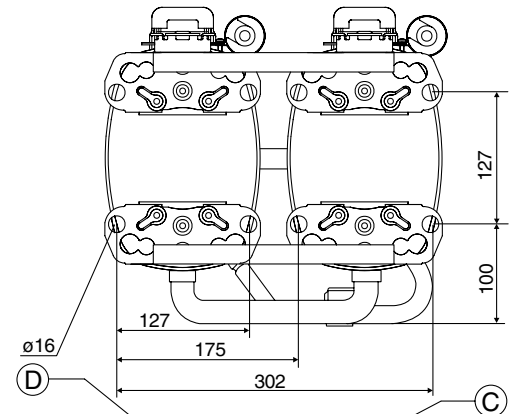

### Capacity (EN 12900/CECOMAF)

watt

Comp.\°C	-35	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
SC12/12G	129	226	350	399	505	696	928	1206	1535	1920	2108	2364	2875

### Capacity (ASHRAE)

watt

Comp.\°C	-35	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
SC12/12G	159	279	432	492	623	860	1147	1493	1902	2382	2617	2939	3580

### Power consumption

watt

Comp.\°C	-35	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
SC12/12G	296	373	454	481	537	622	710	800	892	986	1028	1081	1177

### Current consumption

A

Comp.\°C	-35	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
SC12/12G	3.25	3.44	3.66	3.74	3.90	4.17	4.47	4.79	5.14	5.52	5.69	5.92	6.35

### COP (EN 12900/CECOMAF)

W/W

Comp.\°C	-35	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
SC12/12G	0.44	0.61	0.77	0.83	0.94	1.12	1.31	1.51	1.72	1.95	2.05	2.19	2.44

### COP (ASHRAE)



W/W

Comp.\°C	-35	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
SC12/12G	0.54	0.75	0.95	1.02	1.16	1.38	1.62	1.87	2.13	2.42	2.55	2.72	3.04

Test conditions	EN 12900/CECOMAF	ASHRAE
Condensing temperature	55°C	55°C
Ambient and suction gas temp.	32°C	32°C
Liquid temperature	55°C	32°C
Fan cooling F <sub>2</sub> , 220V 50Hz		

### Accessories

Devices	pcs.	SC12/12G
Starting relay	2	117U6003
Starting capacitor 80 µF	2	117U5017
Cover	2	103N2009
Cord relief	2	103N1004
Time-delay relay	1	117N0001
Check valve (to be used with time-delay relay)	2	020-1014
Service valve	1	118-7350 (12 mm)
Solder connector (alternative)	1	104B0584 (12 mm)
Seal ring for service valve and solder connector	1	118-3638
Mounting accessories	2	
Bolt joint for one compressor		118-1917
Bolt joint in quantities		118-1918

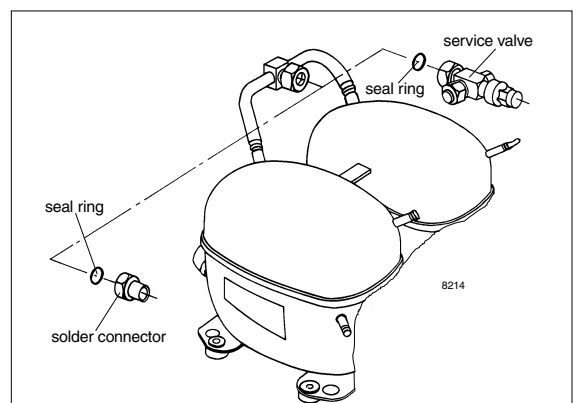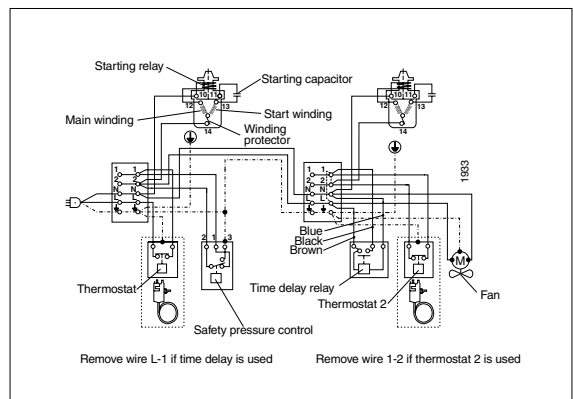

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

