


▽ CRITICAL CHARACTERISTICS
 ▽ KEY CHARACTERISTICS
 ○ INSPECTION
 MUST COMPLY TO ROHS DIRECTIVE 2011/65/EU

NOTE:
 1. BACK CHANNEL COOLING: BOTTOM IN TOP OUT
 2. CABLE FEED: BOTTOM ENTRY & TOP EXIT
 3. PLINTH HEIGHT CAN BE OF 100, 200, & 400mm HEIGHT

INTERPRET DIM. & TOL. PER ASME Y14.5M-1994 ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.10 ±0.50 ±1.0		THIRD ANGLE PROJECTION	SCALE 0.150	SIZE A1	MATERIAL
PM CONTROLLED DRAWING NOT VALID WITHOUT FROZEN DATE IN ID STAMP				FINISH DESCRIPTION	
CHANGED DESIGNED CHECKED	SADRISH LAURI	MAY-21-2019 MAY-07-2019	MCAD-PLV-D10H-IP54-FD-CN -DDTCM-BTEN-TPEX		
CONFIDENTIAL - PROPERTY OF DANFOSS A/S NORBORG, DENMARK. NOT TO BE HANDED OVER TO BE COPIED OR BE USED BY A THIRD PARTY. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.			DRAWING NUMBER 132R0258	REV 002 SHEET 1 OF 3	DATE 132R0258

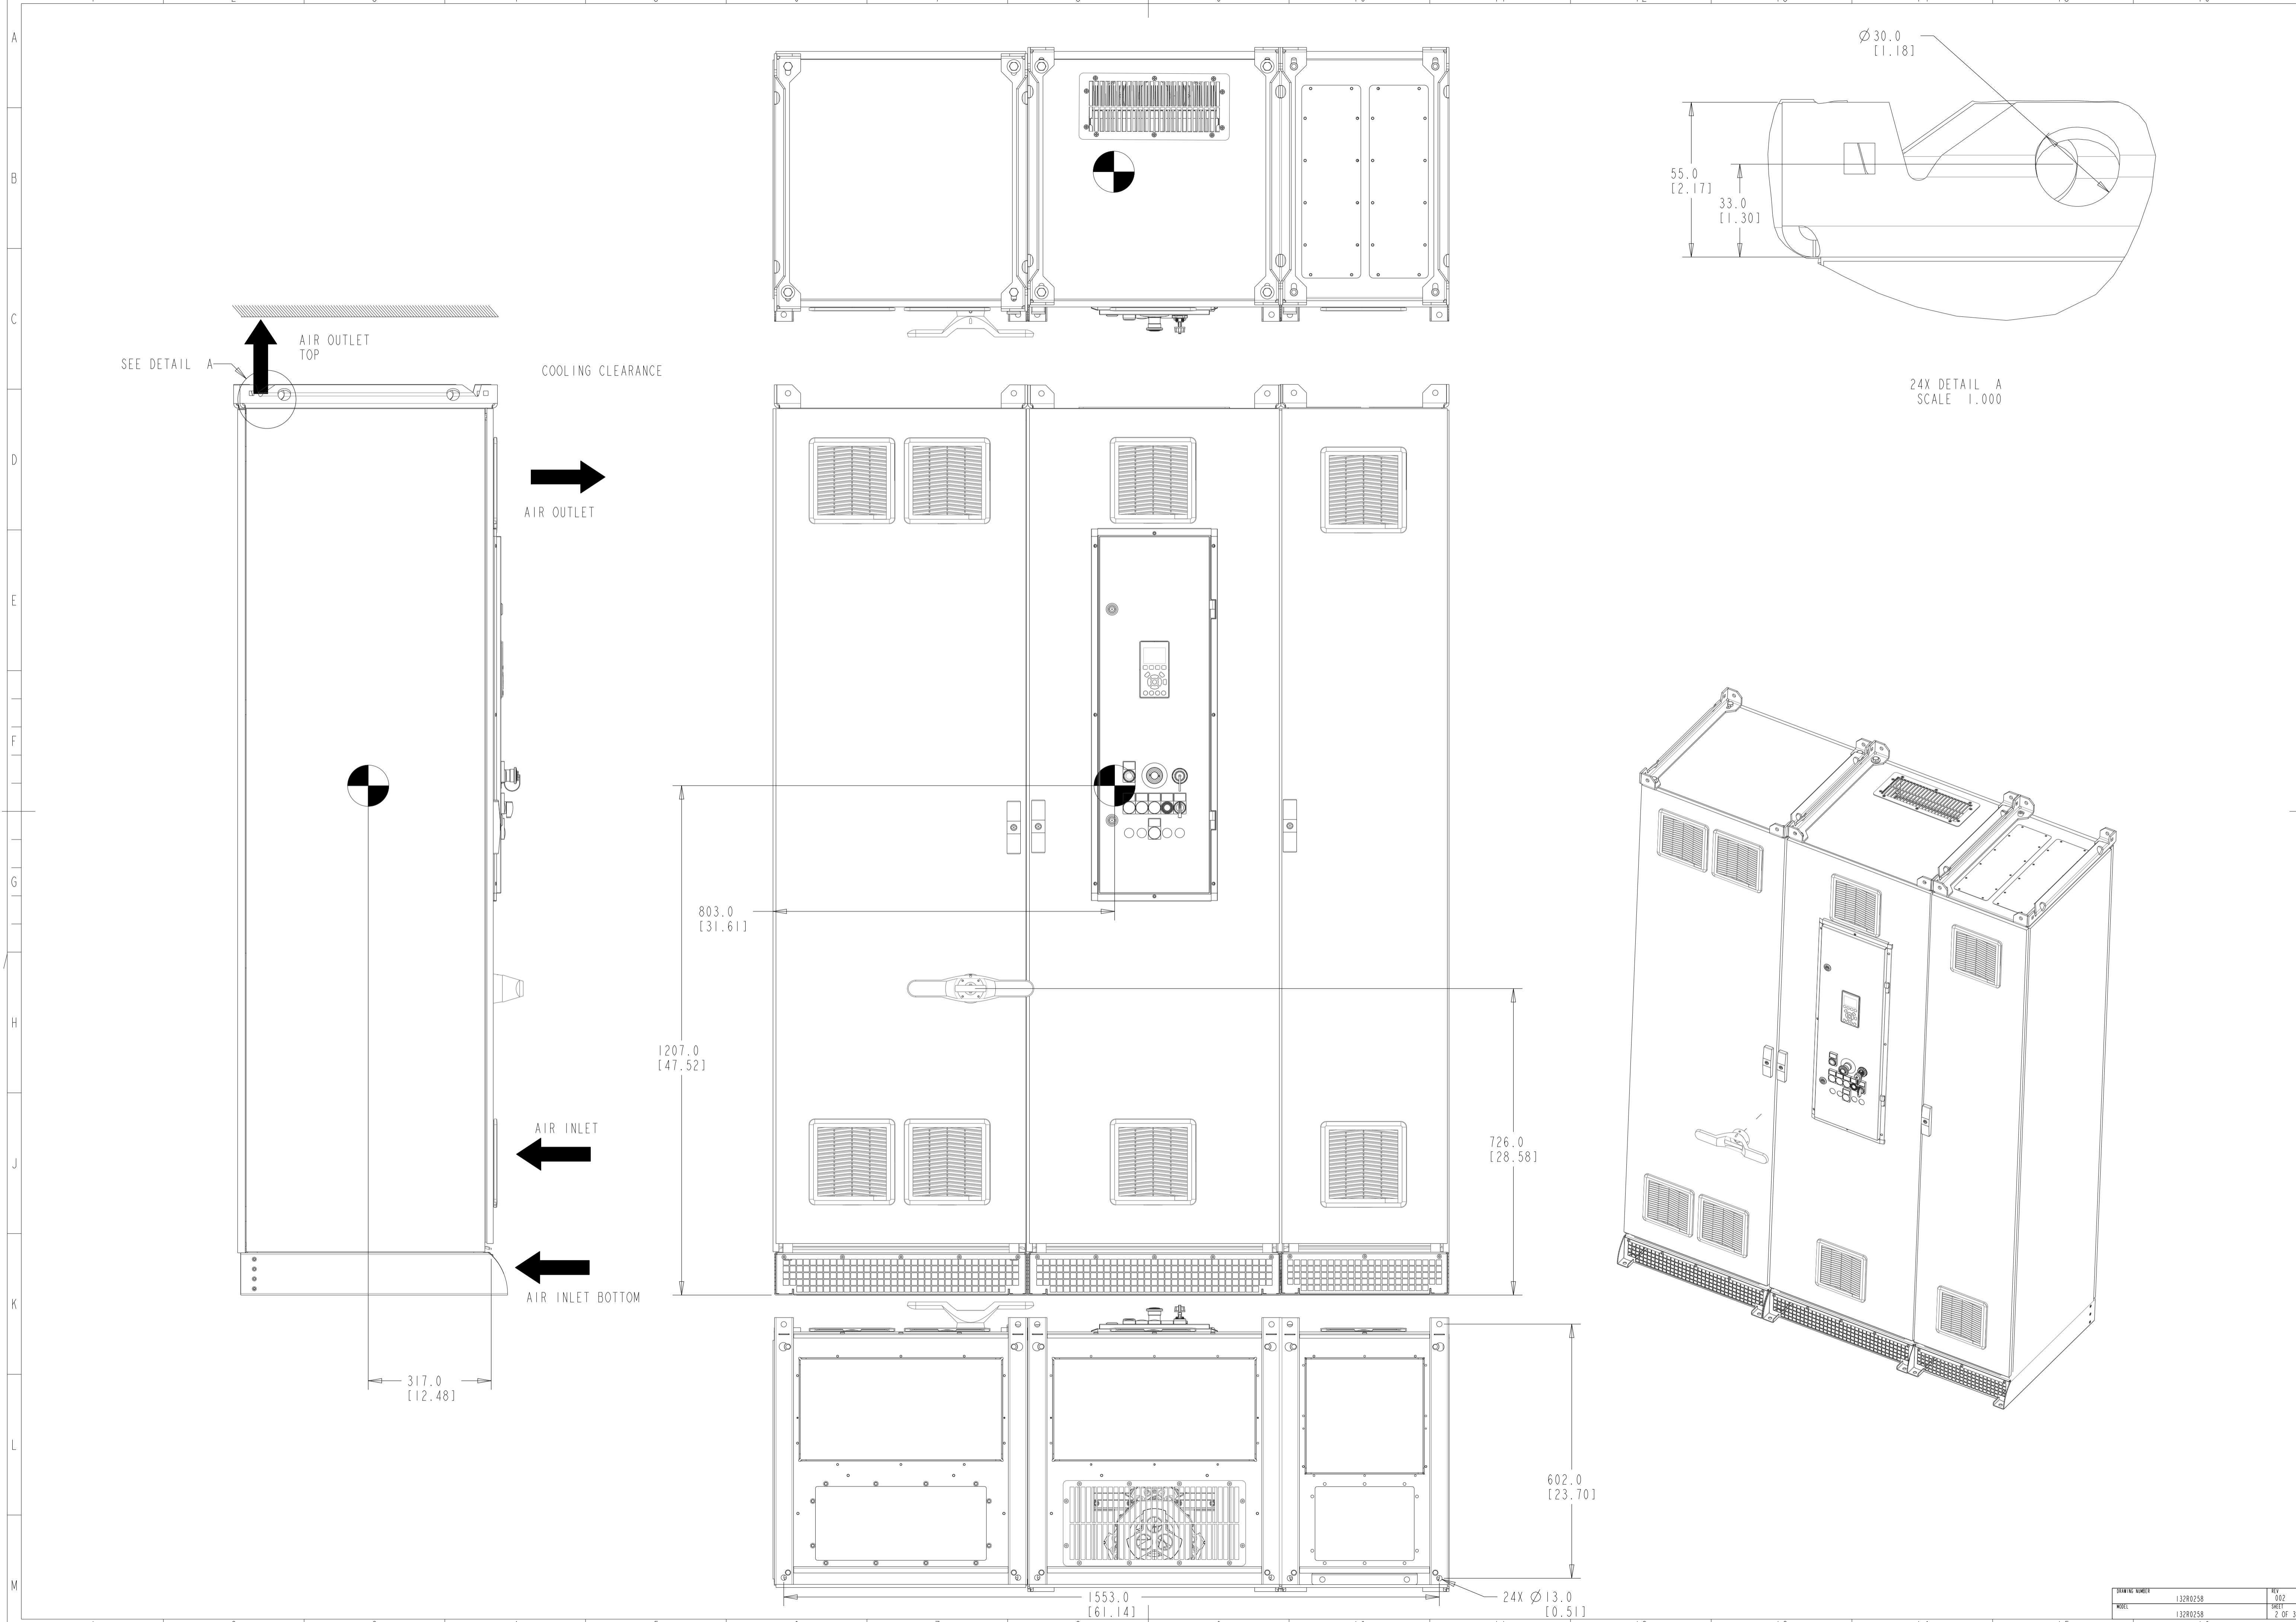

REVISION	132R0258	REV	002
DATE	132R0258	SHEET	2 OF 3

