

1. MAX AIRFLOW (BACKCHANNEL) - 7 M³/MIN (250 CFM)
2. MAX AIRFLOW (CABINET) - 1.7 M³/MIN (60 CFM)
3. MAX WEIGHT = 62 KG (135 LBS)
4. CENTER OF GRAVITY:
APPROXIMATE LOCATION ONLY, LOCATION MAY VARY BASED ON POWER RATING AND OPTIONS ORDERED.

INTERPRET DIM. & TOL. PER ASME Y14.5M-1994 ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.4 ±0.2 ≤0.5		THIRD ANGLE PROJECTION	SCALE 0.175	SIZE A2	MATERIAL	
— PDM CONTROLLED DRAWING — NOT VALID WITHOUT FROZEN DATE IN 10 STAMP				FINISH	NA	
DESIGNED	BC			03/14/19	DESCRIPTION INSTALLATION DRAWING, JB, IP20/CHASSIS	
CHECKED	Daniel Hale	CONFIDENTIAL: PROPERTY OF DANFOSS A/S NORDBORG, DENMARK. NOT TO BE HANDED OVER TO BE COPIED OR BE USED BY A THIRD PARTY. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.		DRAWING NUMBER 1770694	REV 001	
				PHYS. NO.	PASA.01.PRODUCTION	SHEET 1 OF 3

Ⓞ CRITICAL CHARACTERISTICS
 ▽ KEY CHARACTERISTICS
 ○ INSPECTION
 MUST COMPLY TO ROHS DIRECTIVE 2011/65/EU

SECTION A-A
MAINS TERMINALS

SECTION B-B
MOTOR TERMINALS

MAINS TERMINAL

MOTOR TERMINAL

0 [0.0] 272 [10.7]

188 [7.4]

83 [3.3]

0 [0.0]

244 [9.6]

0 [0.0]


EARTHING / GROUNDING CONNECTIONS

0.0 [0] 10.4 [0] 0 [0.0] 59 [2.3] 145 [5.7] 182 [7.2] 3X M8X18 STUD WITH NUT

0 [0.0] 62 [2.4] 145 [5.7] 224 [8.8] 23 [0.9] 101 [4.0] 184 [7.3] (R) (T) (V)

2X 12 [0.5] 2X 102 [4.0] MAINS SIDE CABLE ENTRY MOTOR SIDE CABLE ENTRY

2X 105 [4.1] 216 [8.5]




TOP VIEW

MAINS TERMINAL

MOTOR TERMINAL

M10 13 [0.5] 32 [1.3]

M10 13 [0.5] 32 [1.3]

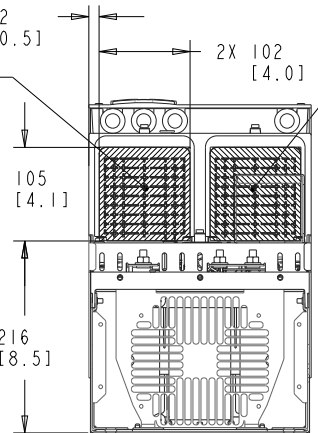

BOTTOM VIEW

NOTES:

1. PLACE CABLES THROUGH MARKED AREAS
2. 95MM² (3/0) MAX WIRE SIZE

REVISION NUMBER	1770694	REV	001
DATE	PASA.01.PRODUCTION	SHEET	2 OF 3

THE TABLES BELOW MAY BE USED TO CONFIRM THE CORRECT FRAME SIZE AND DRAWING FOR A SPECIFIC DRIVE RATING (POWER AND VOLTAGE). THIS DRAWING IS FOR J8 FRAMES, THE TABLES BELOW IDENTIFY WHICH DRIVES ARE REPRESENTED BY THIS DRAWING.

THE TABLE BELOW CAN BE USED TO DETERMINE THE FRAME SIZE IF THE SPECIFIC MODEL/TYPECODE IS KNOWN.

KW RATED DRIVES				
KW NORMAL OVERLOAD	90	110	132	160
400V	J8	J8	J8	J8

PLATFORM	VOLTAGE	MODEL/TYPECODE	FRAME(IP20)
FC-361	T4	FC-361N90KT4	J8
		FC-361N110T4	
		FC-361N132T4	
		FC-361N160T4	

DESIGN NUMBER	1770694	REV	001
DATE	P454.D1 PRODUCTION	SHEET	3 OF 3