

THE TECHNICAL DATA OF THE VACON® 20 X AC DRIVE

Technical item or function	Technical data
Mains connection	Input voltage U_{in} 3AC 208...240V 1AC 208...240V 3AC 380...480V
	Input voltage tolerance -15%...+10% continuously
	Input frequency 50/60 Hz
	Input frequency tolerance 45...66 Hz
	Protection class I
	Connection to mains Once per minute or less
	Starting delay 4 s
	Supply network IT and TN-networks (cannot be used with corner earthed networks)
	Short-circuit current Maximum short-circuit current has to be <50kA
	DC connection Available as standard in MU2 single-phase frames and MU3
Motor connection	Output voltage 3AC 0... U_{in}
	Rated output current I_N : Ambient temperature max. +40°C
	Overload output current 1.5 x I_N [1 min/10 min]
	Starting current I_S for 2 s every 20 s ($I_S = 2.0 * I_N$)
	Output frequency 0...320 Hz
	Frequency resolution 0.01 Hz
	Protection class I
	Motor characteristics AC squirrel cage motors Permanent magnet motors
	Cable type Screened motor cable
	Cable maximum length 30 m
Control characteristics	Switching frequency Programmable 2...16 kHz; Default 6 kHz. Automatic switching frequency derating in case of overheating
	Frequency reference: Analogue input Panel reference Resolution $\pm 0.05\%$ (11-bit), accuracy $\pm 1\%$ Resolution 0.01 Hz
	Field weakening point 8...320 Hz
	Acceleration time 0.1...3000 sec
	Deceleration time 0.1...3000 sec
	Braking Brake chopper standard in all three-phase frames. External brake resistor optional.

CABLE AND FUSE SIZES,

NORTH AMERICA

The recommended fuse types are class T (UL & CSA). The fuse voltage rating should be selected according to the supply network. The final selection should be made according to local regulations, cable installation conditions and cable specifications. Bigger fuses than those recommended below shall not be used.

Check that the fuse operating time is less than 0.4 seconds. Operating time depends on used fuse type and impedance of the supply circuit. Consult the factory about faster fuses. VACON® also recommends for high speed J (UL & CSA) fuse ranges.



DPD01821B

Download and read VACON® 20 X Installation Manual, wall-mounted drives at:

<http://drives.danfoss.com/knowledge-center/technical-documentation/>

UL STANDARDS ON CABLING

To obey the UL (Underwriters Laboratories) regulations, use a UL-approved Class 1 copper wire with a minimum heat resistance of +158 or +167 °F (+70 or +75°C).

You can use the drive on a circuit that gives a maximum of 50 000 rms symmetrical amperes, and a maximum of 500 V AC, when the drive is protected by Class T and J fuses.

The dimensions of the cables must agree with the requirements of the UL508C.

- The cables must be PVC-isolated.
- The maximum ambient temperature is +104 °F (+40°C).
- The maximum temperature of the cable surface is +158 or +167 °F (+70 or +75°C).
- Use only cables with a concentric copper shield.
- The maximum number of parallel cables is 9.

When you use parallel cables, make sure that you obey the requirements of the cross-sectional area and the maximum number of cables.

For important information on the requirements of the grounding conductor, see the UL508C.

For the correction factors for each temperature, see the instructions of the UL508C.


**THE CABLE AND FUSE SIZES FOR VACON® 20 X IN NORTH AMERICA,
MAINS VOLTAGE 208-240 V AND 380-500 V**

Frame	Type	IL [A]	Fuse (class T) [A]	Mains and motor cable Cu	Terminal cable size	
					Main terminal	Earth terminal
MU2	0004 2	4.3	6	AWG14	AWG24-AWG12	AWG17-AWG10
	0003 4 - 0004 4	3.2 - 4.0				
	0005 2 - 0007 2	6.8 - 8.4	10	AWG14	AWG24-AWG12	AWG17-AWG10
	0005 4 - 0006 4	5.6 - 7.3				
MU2 1-phase	0008 4	9.6	15	AWG14	AWG24-AWG12	AWG17-AWG10
	0004 2	8.3	20	AWG14	AWG24-AWG12	AWG17-AWG10
	0005 2	11.2	20	AWG14	AWG24-AWG12	AWG17-AWG10
MU3	0011 2	13.4	15	AWG14	AWG20-AWG6	AWG17-AWG10
	0009 4	11.5				
	0012 2	14.2	20	AWG12	AWG20-AWG6	AWG17-AWG10
	0012 4	14.9				
MU3	0017 2	20.6	25	AWG10	AWG20-AWG6	AWG17-AWG10
	0016 4	20.0				

THE TIGHTENING TORQUES OF CABLE TERMINALS

Frame	Type	Tightening torque Power and motor terminals [Nm] lb-in.		Tightening torque EMC grounding clamps [Nm] lb-in.		Tightening torque Grounding terminals [Nm] lb-in.	
		[Nm]	lb-in.	[Nm]	lb-in.	[Nm]	lb-in.
MU2	0003 4-0008 4 0004 2-0007 2	0.5-0.6	4.5-5.3	1.5	13.3	2.0	17.7
MU3	0009 4-0016 4 0011 2-0017 2	1.2-1.5	10.6-13.3	1.5	13.3	2.0	17.7

CABLE ENTRIES, MU2 AND MU3 INSTALLATIONS

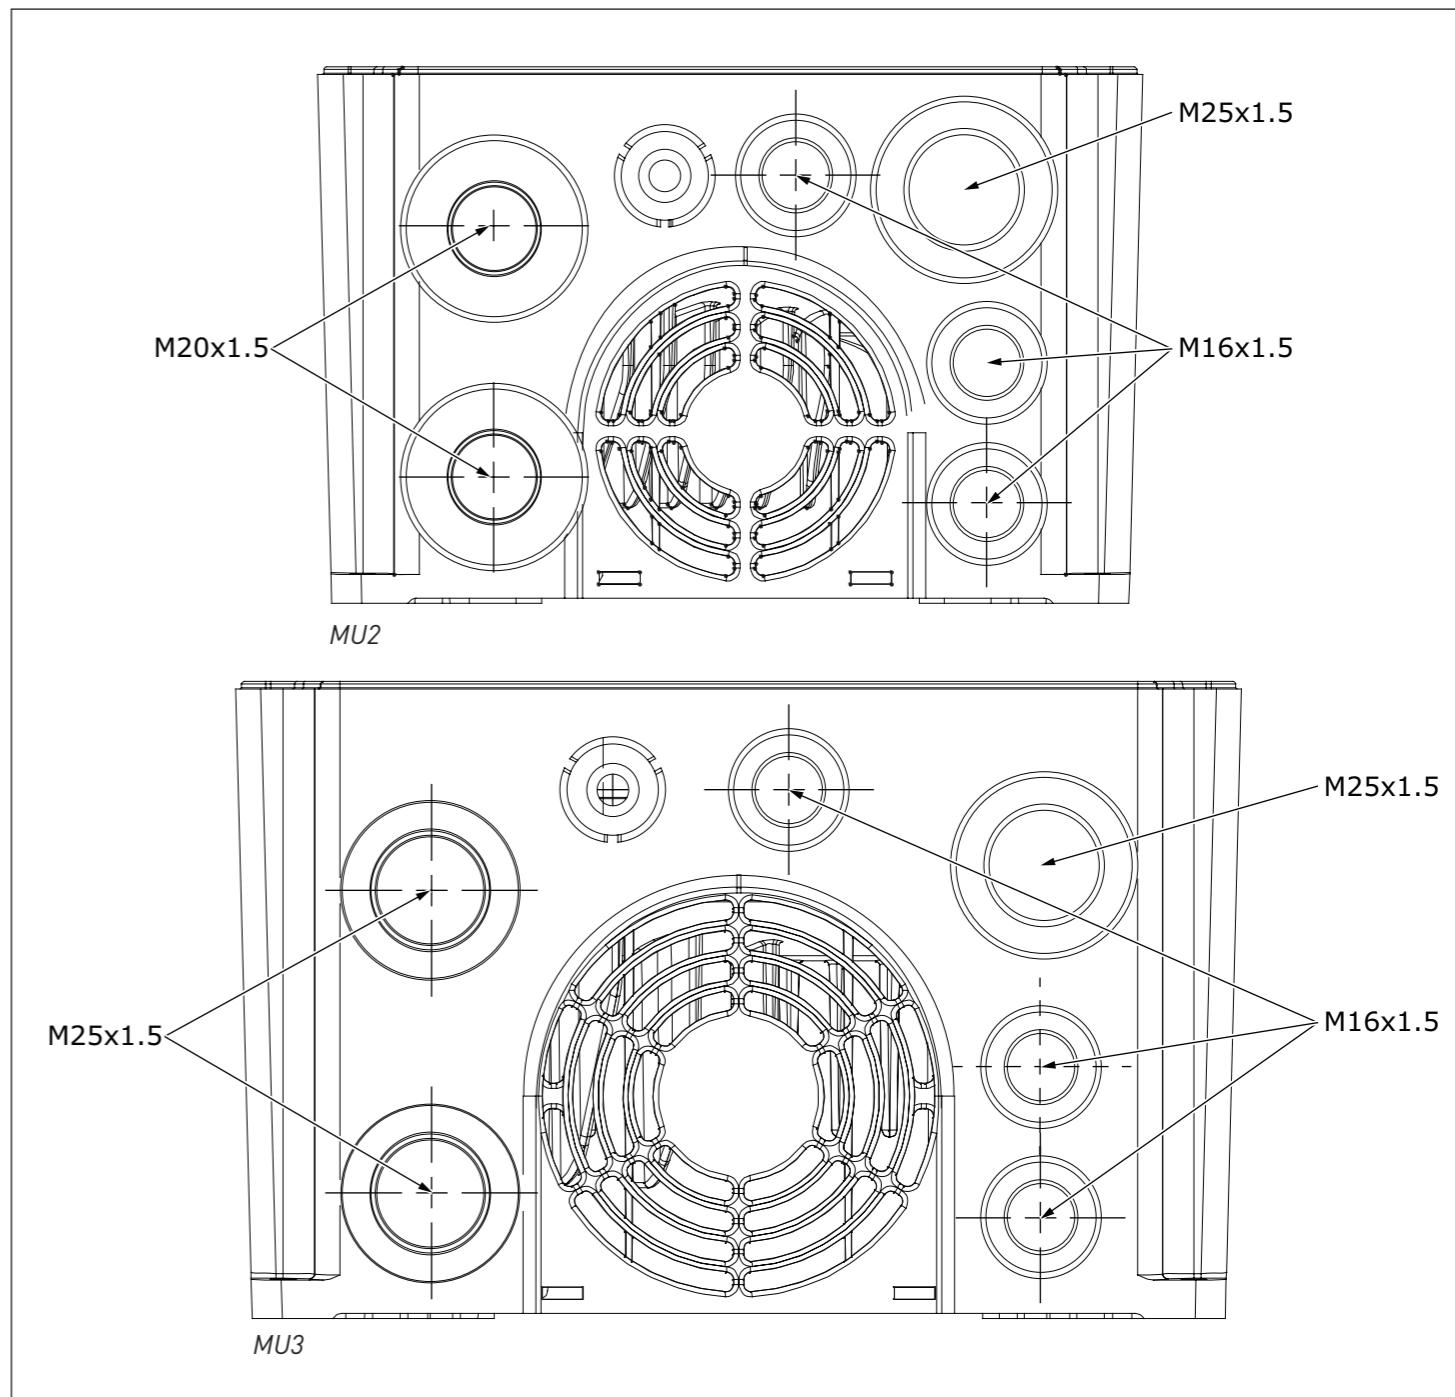

TIGHTENING TORQUE OF NPT ADAPTERS TO METRIC THREADS CABLE ENTRIES

Frame	Thread male metric	Thread male NPT	Tightening torque	
			[Nm]	lb-in.
MU2	M20	1/2"	2.0	17.7
	M25	3/4"	4.0	35.5
MU3	M25	3/4"	4.0	35.5

NPT adapter order information

M20: ADEC M20-T12

M25: ADEM M25-T34