

Data sheet

# MCX06C

## Programmable controller



MCX06C is an electronic controller that holds all the typical functionalities of MCX controllers in the 32x74 mm standard size:

- programmability
- connection to the CANbus local network
- Modbus RS485 serial interface

### Features MCX06C

- 4 analog and 6 digital inputs
- 2 analog and 6 digital outputs
- Insulated power supply 20 / 60 V DC - 24 V AC
- Easy upload of application software through CANbus connection for programming key
- Remote access to data through CANbus connection for additional display (LCD available) and keyboard
- RTC clock for managing weekly time programs and data logging information
- Modbus RS485 serial interface
- Display LED with 2 groups of digits for showing the desired information in one screen
- Dimensions 33x75 mm
- Panel mounting


**General features**

FEATURES	DESCRIPTION
Power supply	20 / 60 V DC and 24 V AC $\pm$ 15% 50/60 Hz Maximum power consumption: 6 W, 9 VA Insulation between power supply and the extra-low voltage: functional
Plastic housing	Self extinguishing V0 according to IEC 60695-11-10 and glowing / hot wire test at 960 °C according to IEC 60695-2-12
Ball test	125 °C according to IEC 60730-1 Leakage current: $\geq$ 250 V according to IEC 60112
Operating conditions	CE: -20T60 / UL: 0T55, 90% RH non-condensing
Storage conditions	-30T80, 90% RH non-condensing
Integration	In Class I and / or II appliances
Index of protection	IP64 ~ NEMA3R only on the front cover
Period of electric stress across insulating parts	Long
Resistance to heat and fire	Category D
Immunity against voltage surges	Category I
Software class and structure	Class A
Approvals	<p>CE mark</p> <p>This product is designed to comply with the following EU standards:</p> <ul style="list-style-type: none"> <li>• Low voltage directive LVD 2014/35/EU: <ul style="list-style-type: none"> <li>– EN60730-1: 2011 (Automatic electrical control for household and similar use. General requirements)</li> <li>– EN60730-2-9: 2010 (Particular requirements for temperature sensing controls)</li> </ul> </li> <li>• Electromagnetic compatibility EMC directive 2014/30/EU: <ul style="list-style-type: none"> <li>– EN 61000-6-3: 2007 +A1: 2011 (Emission standard for residential, commercial and light-industrial environments)</li> <li>– EN 61000-6-2: 2005 (Immunity for industrial environments)</li> </ul> </li> <li>• RoHS directive 2011/65/EU: <ul style="list-style-type: none"> <li>– EN50581: 2012</li> </ul> </li> </ul> <p>UL approval:</p> <ul style="list-style-type: none"> <li>• UL file E31024</li> </ul>

## Inputs/outputs

I/O	TYPE	NUM	SPECIFICATIONS
Analog input	NTC 0 / 1 V 0 / 5 V	2	<b>AI1, AI2</b> Analog inputs selectable via software between: <ul style="list-style-type: none"> <li>• NTC temperature probes, default: 10 kΩ at 25 °C</li> <li>• pressure transducers with 0/5 V output</li> </ul>
	Universal	2	<b>AI3, AI4</b> Universal analog inputs selectable via software between: <ul style="list-style-type: none"> <li>• ON/OFF (current: 20 mA)</li> <li>• 0 / 1 V, 0 / 5 V, 0 / 10 V</li> <li>• 0 / 20 mA, 4 / 20 mA</li> <li>• NTC (10 kΩ at 25 °C)</li> <li>• Pt1000</li> </ul> 12 V+ power supply 12 V DC, 50 mA max for 4 / 20 mA transmitter (total on all outputs) 5 V+ power supply 5 V DC, 80 mA max for 0 / 5 V transmitter (total on all outputs)
Digital input	Voltage free contact	6	<b>DI1, DI2, DI3, DI4, DI5, DI6</b> Current consumption: 5 mA
Analog outputs	0 / 10 V PWM PPM	1	<b>AO1</b> Analog output selectable via software between: <ul style="list-style-type: none"> <li>• pulsing output, synchronous with the line, at modulation of impulse position (PPM) or modulation of impulse width (PWM):               <ul style="list-style-type: none"> <li>– open circuit voltage: 6.8 V</li> <li>– minimum load: 1 kΩ</li> </ul> </li> <li>• pulsing output, at modulation of impulse width (PWM) with range 100 – 500 Hz:               <ul style="list-style-type: none"> <li>– open circuit voltage: 6.8 V</li> <li>– minimum load: 1 kΩ</li> </ul> </li> <li>• 0 / 10 V DC non optoinsulated output, referred to the ground               <ul style="list-style-type: none"> <li>– 10 mA maximum loads</li> </ul> </li> </ul>
	PWM PPM	1	<b>AO2</b> Analog output selectable via software between: <ul style="list-style-type: none"> <li>• pulsing output, synchronous with the line, at modulation of impulse position (PPM) or modulation of impulse width (PWM):               <ul style="list-style-type: none"> <li>– open circuit voltage: 6.8 V</li> <li>– minimum load: 1 kΩ</li> </ul> </li> <li>• pulsing output, at modulation of impulse width (PWM) with range 100 – 500 Hz:               <ul style="list-style-type: none"> <li>– open circuit voltage: 6.8 V</li> <li>– minimum load: 1 kΩ</li> </ul> </li> </ul>
Digital output	Relay	6	Insulation between relays: functional (common lines internally connected) Insulation between relays and the extra-low voltage parts: reinforced Total current load limit: 6 A <b>C1-NO1, C2-NO2, C3-NO3, C4-NO4, C5-NO5, C6-NO6</b> Normally open contact relays <ul style="list-style-type: none"> <li>• characteristics of each relay:               <ul style="list-style-type: none"> <li>– 4 A 30 V DC / 250 V AC for resistive load - 100.000 cycles</li> <li>– 0.7 A 250 V AC for inductive load - 100.000 cycles with cos(phi) = 0.5</li> <li>– UL: 240 V AC - 1 A resistive - 1.0 FLA - 6.0 LRA - 96 V A pilot duty 30.000 cycles</li> </ul> </li> </ul>

Connection diagram

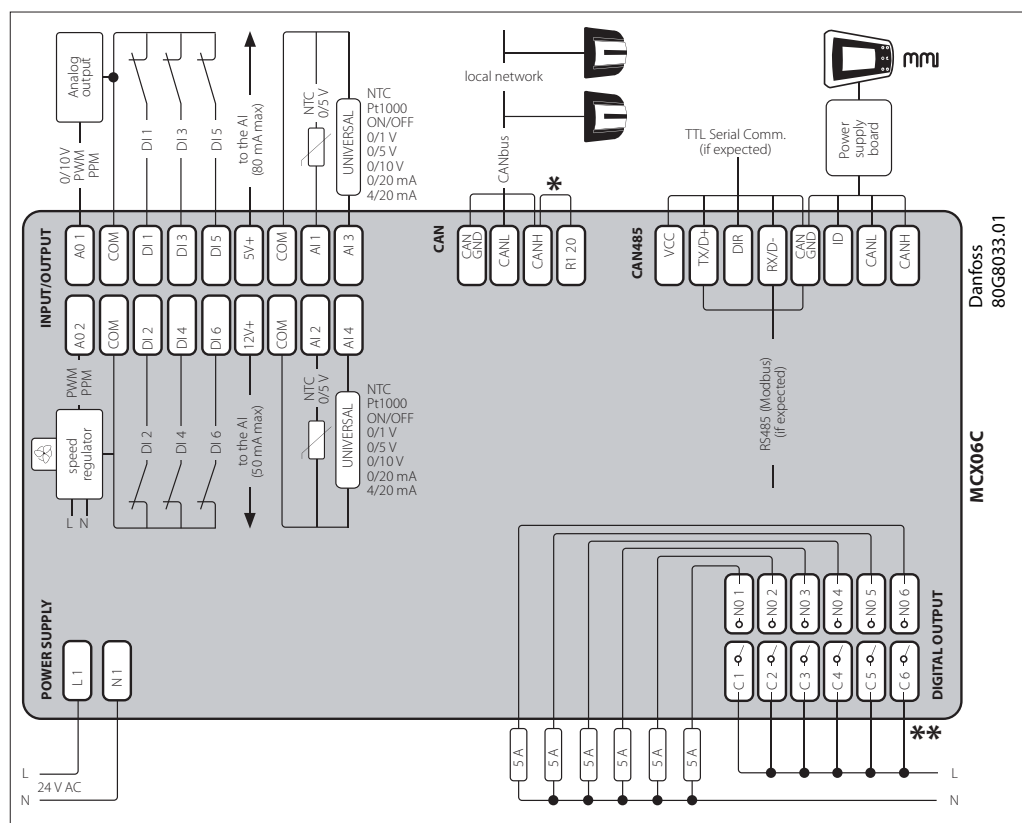


\*NOTE: connection has to be made on the first and last local network units, make the connection as close as possible to the connector

\*\*NOTE: C1, C2, C3, C4, C5, C6 internally connected between themselves

Connection

CONNECTORS	TYPE	DIMENSIONS
<b>Input and output connector</b>	18 way Molex Microfit type (43025-1800) crimping contact type	<ul style="list-style-type: none"> <li>Molex: (43030-0001) section cable AWG20-24 (0.52-0.20 mm<sup>2</sup>)</li> <li>Molex: (43030-0004) section cable AWG26-30 (0.13-0.05 mm<sup>2</sup>)</li> <li>Instrument for the Molex crimp code 69008-0982 (20-24 AWG)</li> <li>Instrument for the Molex crimp code 69008-0983 (26-30 AWG)</li> </ul>
<b>CAN connector</b>	4 way Molex Wire-to-board type (87369-0400) crimping contact type	<ul style="list-style-type: none"> <li>Molex: (50212-8000) section cable AWG24-30 (0.20-0.05 mm<sup>2</sup>)</li> <li>Instrument for the Molex crimp code 63811-1200</li> </ul>
<b>CAN / 485 connector</b>	8 way Molex Wire-to-board type (87369-0800) crimping contact type	<ul style="list-style-type: none"> <li>Molex: (50212-8000) section cable AWG24-30 (0.20-0.05 mm<sup>2</sup>)</li> <li>Instrument for the Molex crimp code 63811-1200</li> </ul>
<b>Power supply connector</b>	2 way Molex KK type (09-50-8021) crimping contact type	<ul style="list-style-type: none"> <li>Molex: (08-50-0105) section cable AWG18-24 (0.82-0.20 mm<sup>2</sup>)</li> <li>Molex: (08-50-0107) section cable AWG22-26 (0.32-0.13 mm<sup>2</sup>)</li> <li>Instrument for the Molex crimp code 69008-0953</li> </ul>
<b>Digital output 1-6 connector</b>	12 way Molex Minifit Jr. type (39-01-2125) crimping contact type	<ul style="list-style-type: none"> <li>Molex: (39-00-0077) section cable AWG16 (1.30 mm<sup>2</sup>)</li> <li>Molex: (39-00-0038) section cable AWG18-24 (0.82-0.20 mm<sup>2</sup>)</li> <li>Molex: (39-00-0046) section cable AWG22-28 (0.32-0.08 mm<sup>2</sup>)</li> <li>Instrument for the Molex crimp code 69008-0724</li> </ul>

### Dimensions

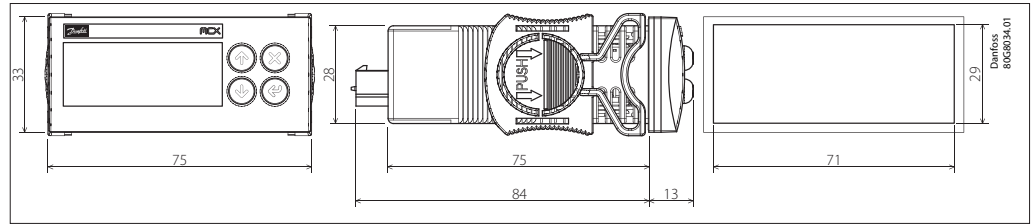

### User interface

TYPE	FEATURES	DESCRIPTION
LED display	Display	LED display with two groups of digits and 18 icons 
	Digits	Green colour
	Allarm/warning icons	Red colour
	Other icons	Yellow / amber colour
	Meaning of the icons and digits	Settled by the application software
	Dimensions	45x17 mm
Keyboard	Number of keys	4
	Keys function	Set by the application software

### Product part numbers

DESCRIPTION	CODE NO.
MCX06C, 24V, LED, RS485, RTC, S	080G0066
MCX06C, 24V, LED, RS485, RTC, I/36	080G0107

Note: single pack codes (S) don't include standard kit connectors,  
industrial pack codes (I) don't include standard kit connectors

### Accessories part numbers

DESCRIPTION	CODE NO.
MCX06C CONNECTORS KIT	080G0175
ACCCNX, WIRED CONNECTORS KIT FOR MCX06C, 1m CABLE	080G0081
ACCCNX, WIRED CONNECTORS KIT FOR MCX06C, 2m CABLE	080G0082