


Data sheet

Capacity regulation with pulse solenoid valve

EVRP 10

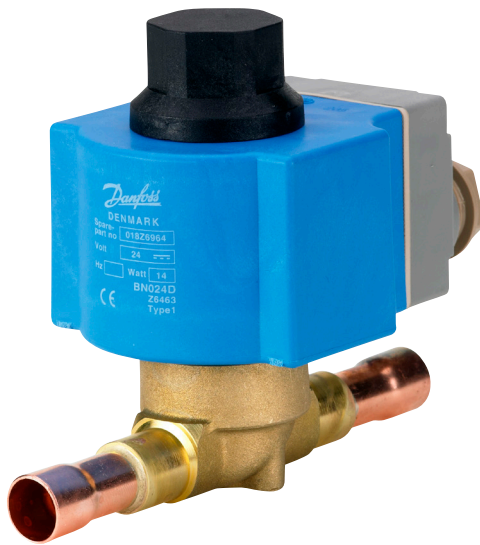

Danfoss has developed a pulsating solenoid valve, EVRP 10, for use in applications where an extremely accurate regulation of media temperature is required.

Pulse solenoid valve EVRP 10 is used as a capacity regulator to adapt compressor capacity to the actual evaporator load.

EVRP 10 must be installed in a bypass between the high and low pressure sides of the refrigeration system.

It is specially designed for hot gas injection between evaporator and expansion valve.


Application


- Container refrigeration systems
- Ice cream production
- Air conditioning plant
- Wide range

Function

Capacity regulation is controlled by a signal from a temperature sensor located in the cooled medium, for instance air. The signal is converted by a control unit into a pulse modulated signal for the EVRP pulse solenoid valve.

This form of regulation is very stable. Variations in the temperature of refrigerated items can be held within ± 0.25 °C.

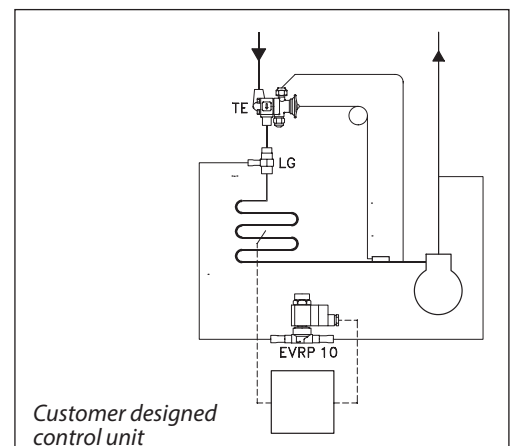


Data sheet | Capacity regulation with pulse solenoid valve, EVRP 10
Ordering
Separate valve body


Type	Connection	Code no.
EVRP 10	½ in. solder ODF	032F3298

Technical data

Refrigerants	R 134a, R 502
K _v value	1.5 m ³ /h
Min. opening differential pressure	0.05 bar
Max. opening differential pressure	21 bar
Max. working pressure, PB	42 bar
Media temperature	-60 – 120 °C
Mounting condition	Armature vertically upwards ±30°
Max. operating cycles	10 per minute
Life in no. of operating cycles	Min. 5 x 10 ⁶

Ordering
Coils for EVRP 10


Type	Tambient [°C]	Supply voltage [V]	Voltage variation	Frequency [Hz]	Power consumption [W]	Screws	Colour	Code no.
BN024C	-40T80	24	±10%	50	6.5	18/8 stainless steel	Blue	018Z6826
		24	±10%	60	6			
BN024D	-40T50	24	±10%	DC	14	Zn-chromated	Blue	018Z6964

Technical data
Enclosure

IP00

Ordering
Accessories

Description	Code no.
Service / mounting kit	032F9570

Hot gas replacement capacity

Capacities are given for 100% opening of EVRP and are composed of the EVRP hot gas capacity + the extra capacity yielded by the thermostatic expansion valve to maintain constant superheat across the evaporator.

Type	Evaporating temperature t_e [°C]	Hot gas replacement capacity Q [kW] Subcooling $\Delta t_{sub} = 4$ K Superheat = 0 K				
		Condensing temperature t_c [°C]				
		20	30	40	50	60

R134a

EVRP 10	10	12.2	16.5	20.3	24.5	28.7
	0	13.0	16.6	20.5	24.6	28.9
	-10	13.1	16.7	20.6	24.9	29.2
	-20	13.2	16.8	20.8	25.2	29.6
	-30	13.4	17.0	21.1	25.5	30.2

R502

EVRP 10	10	16.1	21.4	25.0	28.6	31.8
	0	17.9	21.6	25.2	28.9	32.1
	-10	18.1	21.7	25.5	29.2	32.6
	-20	18.2	21.9	25.8	29.6	33.1
	-30	18.4	22.2	26.2	30.1	33.7

The evaporator load is given by the actual application and the limits set when sizing the system. The compressor capacity can be found from data supplied. The difference between compressor capacity and evaporator output at any given time is the required hotgas replacement capacity.

Example:
The temperature of refrigerated items in an R134a container refrigeration system must be precisely 8 °C.

According to the specification, the compressor capacity at an evaporating temperature of 0 °C and a condensing temperature of 40 °C is 70 kW. The evaporator output needed to maintain the temperature of the items in the container at 8 °C is calculated as 58 kW.

To obtain balance in the refrigeration system, 70 – 58 = 12 kW must be applied to the low-pressure side via EVRP 10.

At an evaporating temperature of 0 °C and a condensing temperature of 40 °C, EVRP gives 20.5 kW at 100% opening (see capacity table above).


The 12 kW therefore corresponds to a degree of opening of EVRP 10 to:

$$\frac{12 \times 100}{20.5} = 59\%$$

If changes occur in the ambient temperature of the required evaporator output, etc. the degree of opening of EVRP 10 is constantly changed via the control unit to maintain the temperature of refrigerated items within the range 8 °C ± 0.25 °C.

Dimensions and weight

Separate valve body for EVRP 10

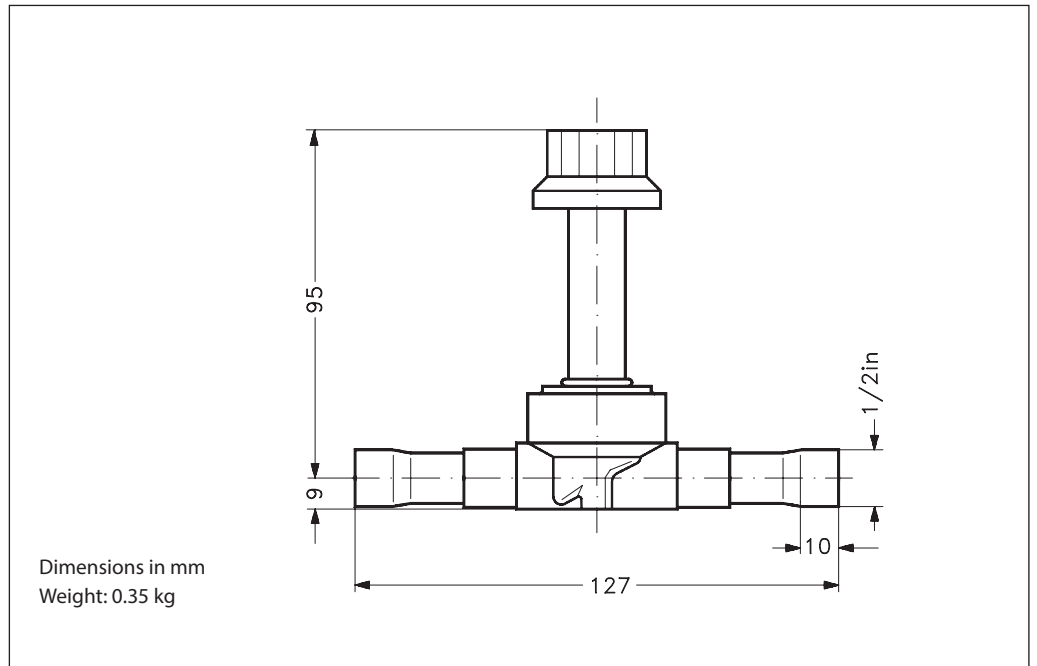

Coils for EVRP 10

