

Data Sheet

Rotary position sensor
Type **DST X520**

For mobile hydraulic applications



The Danfoss DST X520 rotary position sensors without shaft are designed for use in mobile hydraulic applications.

Danfoss DST X520 series uses contactless Hall technology with measurement ranges up to 360°. The Sensors designed for off-highway applications and resistant to shock and vibrations and with high electromagnetic compatibility.

They are E1 approved for on-highway applications. They comes with either analogue, CANopen or SAE J1939 output.

Single and redundant sensor types are available, making the complete portfolio suitable for safetycritical applications.

Features

- Contactless Hall technology for almost infinite sensor life time
- Single or Redundant ranges up to 360° ($\pm 180^\circ$)
- Output: Analogue, CANopen or SAE J1939
- Linearity: $< \pm 0.5\%$ FS
- Resolution:
 - 12 bit (analog)
 - 14 bit (CANopen/SAE J1939)
- IP protection level IP67 - IP69K with female mating connector
- High quality 10 mm SmCo Magnet

Product specification

Technical data

Table 1: Performance

Measuring range	CAN	±180° (360 °C)
	Analogue	Programmable ± 15 °C
Linearity		≤ ± 0.5% FS
Resolution and speed of rotation	12 bit (analog output)	120 rpm max.
	14 bit (CANopen/SAE J1939 output)	
Durability		No wear through the use of permanent external magnet

Table 2: Electrical specifications

Electrical connections	AMP Superseal 6p 282108, Cable or cable + M12	
Output signal	CANopen / SAE J1939, Ratiometric 10-90% of Vs, 0.5–4.5 V DC, 0–10 V DC or 4–20 mA	
Supply voltage	CANopen/J1939, 0.5–4.5 V DC, 4–20 mA: 9–36 V DC 0–10 V DC, 11–36 V DC Ratiometric: 10-90% of Vs: 5 V DC	
Current consumption	Analogue: < 10 mA / pr. channel (no load) CANopen/J1939: < 15 mA (no load)	
MTTFd [Years]	CANopen/J1939: 336 Analogue: 406 (Single Channel)	


Table 3: Environmental conditions

Operating temperature range	-40 – 85 °C	
Thermal drift temperature	< 50 ppm/°C	
EMC	Emission	EN 55011 and CISPR 25
	Immunity	EN 61236-3-2 and ISO 11452-2
	Transient on supply lines	ISO 7637-2
	Bulk current injection	ISO 11452-4
Vibration stability	Sinusoidal	20 g, 10 Hz – 2,000 kHz
Shock resistance	Impulsive on 3 axes	50 g, 11 ms
IP protection	AMP Superseal: IP67 - IP69K with female mating connect Cable: IP69K Cable + M12: IP67	

Table 4: Mechanical characteristics

Materials	Enclosure	PBT (Polybutylene terephthalate)
Net weight		0.036 kg

Sensor output graph

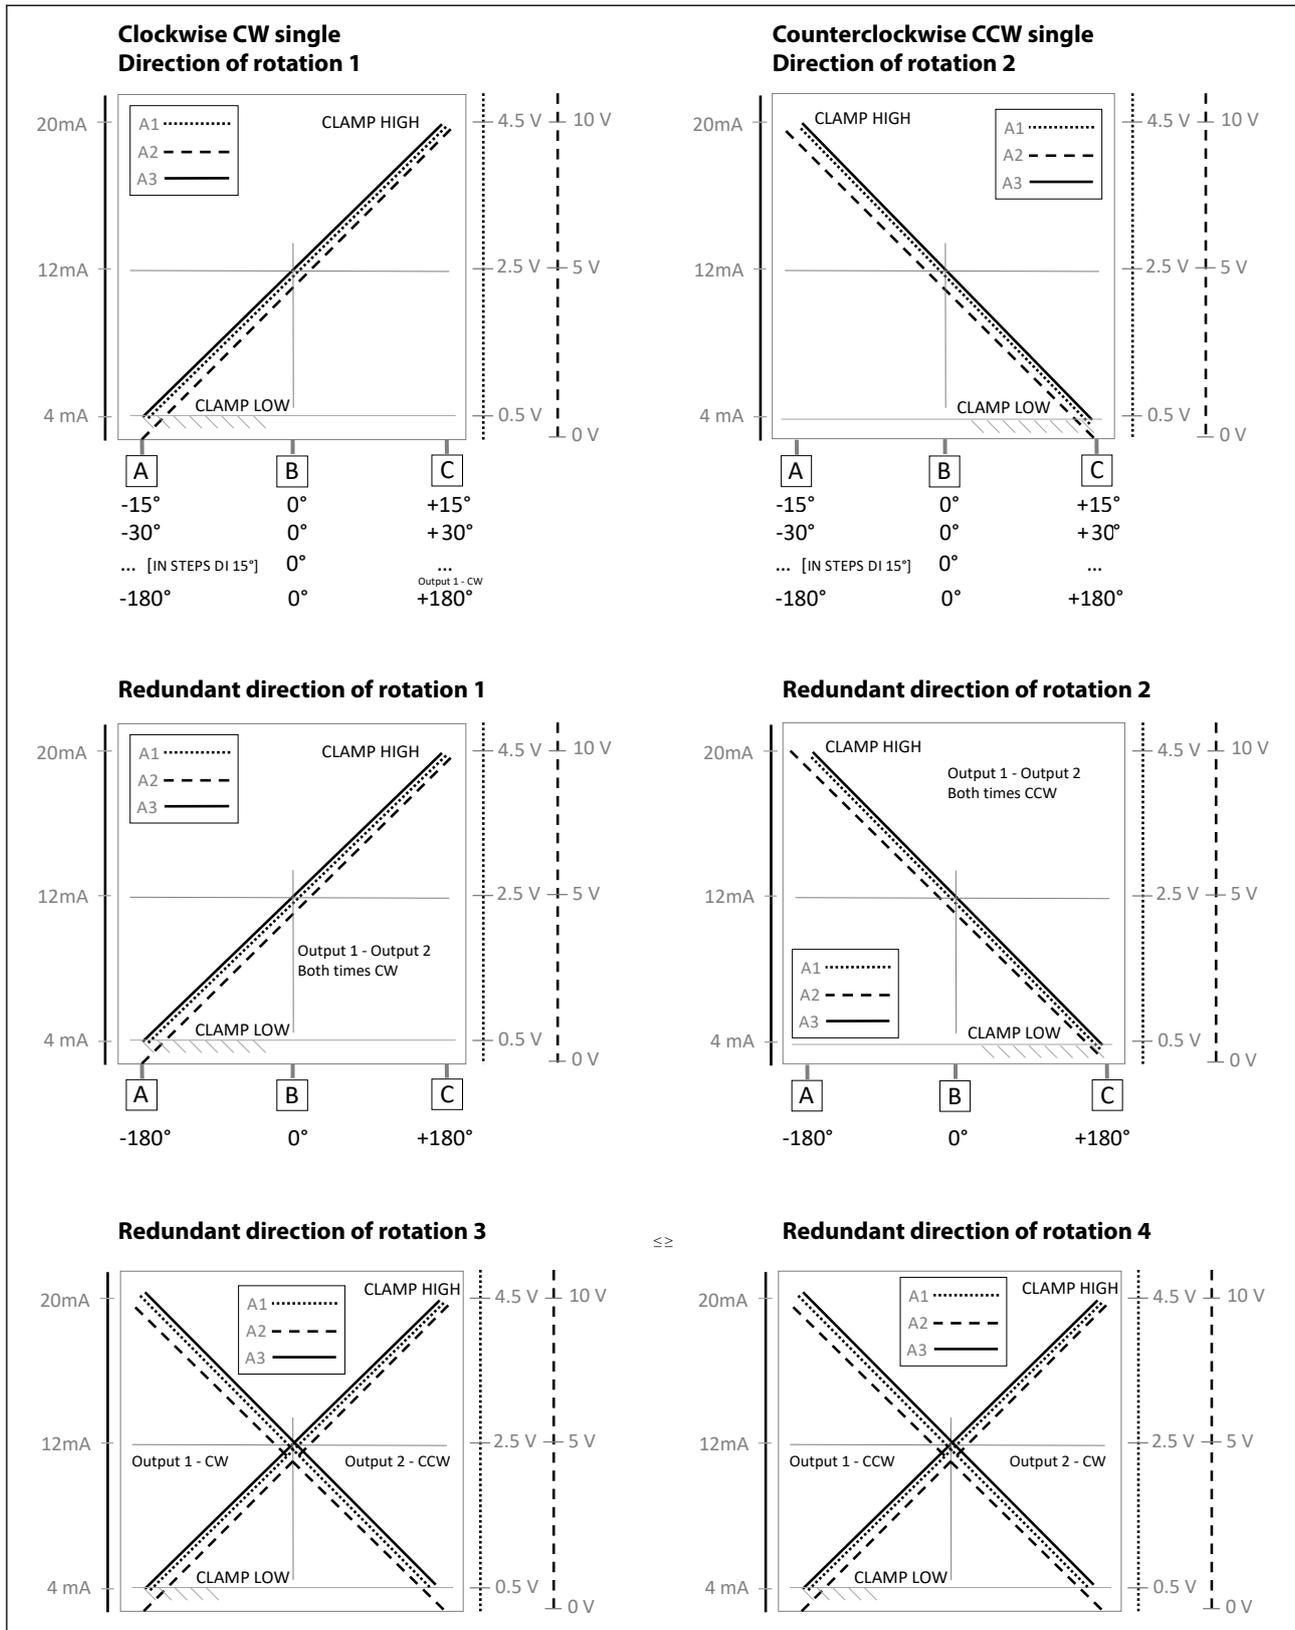

Load conditions

+0.5 V DC – 4.5 V DC output with power 9 – 36 V DC and +0 – 10 V DC output with power 11 – 36 V DC: it is recommended a load resistance > 100 K Ω

+0.5 V DC – 4.5 V DC output with power +5 V DC: it is recommended a load resistance > 10 K Ω


Rotary position sensor, type DST X520

+4 – 20 mA output with power 9 - 15 V DC: maximum load resistance is 200 Ω

+4 – 20 mA output with power 15 – 36 V DC: maximum load resistance is 500 Ω

Dimensions


Figure 1: AMP and Cable version

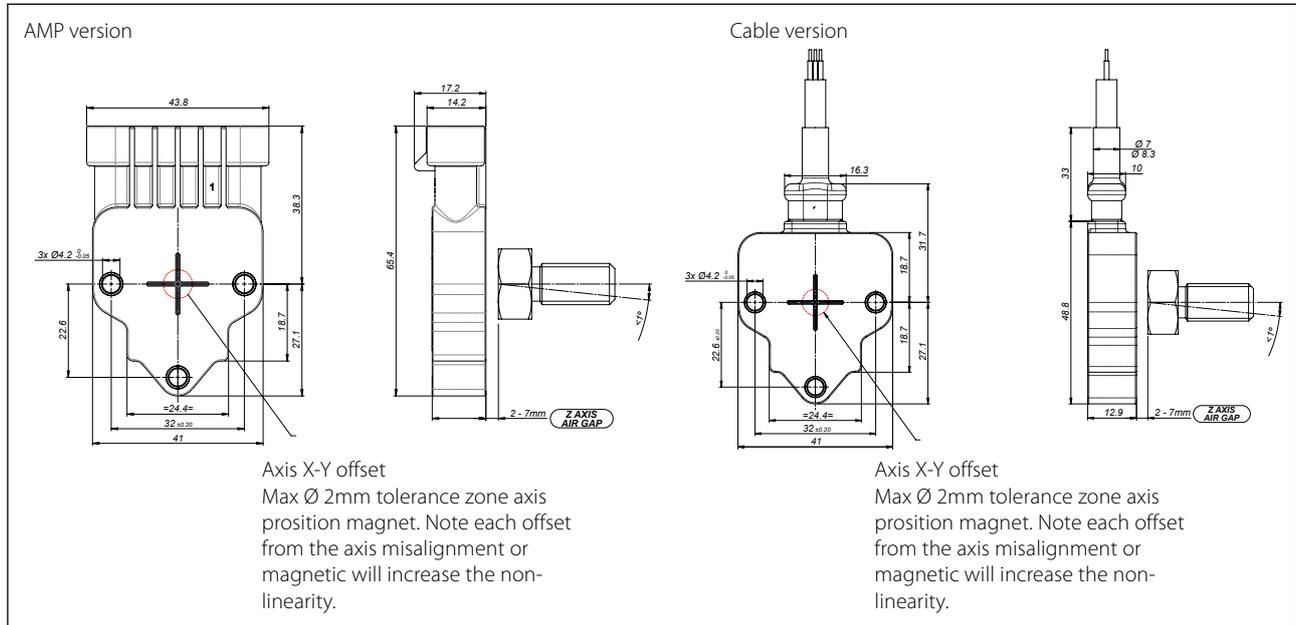


Magnets models

Figure 2: Accessories


PKIT384 Shaft kit + magnet D15 M10 Hexagonal Accessory "A"
Air gap 2-7 mm axis offset $\varnothing 4$ mm

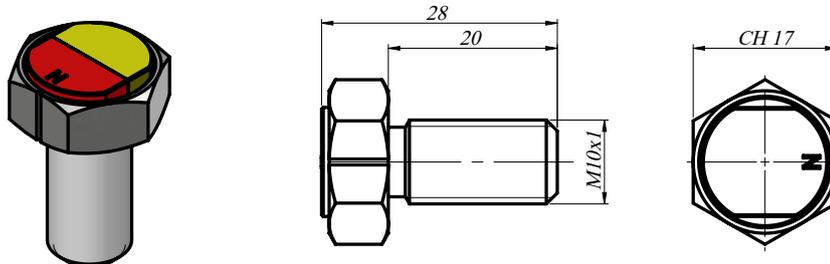

PKIT389 Shaft kit to insert+ magnet D15 - Accessory "B"
Air gap 2-7 mm axis offset $\varnothing 4$ mm

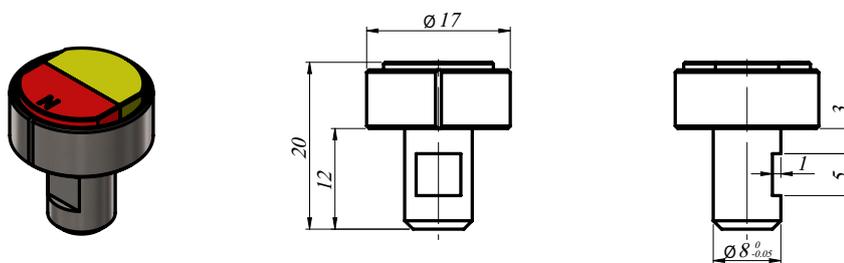

PKIT384 Shaft kit + magnet D15 M10 Hexagonal - Accessory "C"
Air gap 2-7 mm axis offset $\varnothing 4$ mm

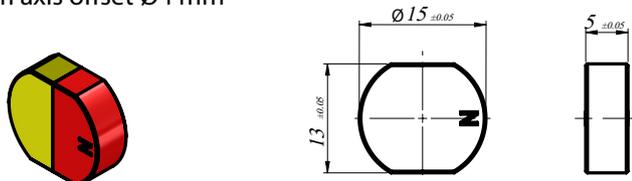

Electrical connections

Figure 3: AMP version, angular positions

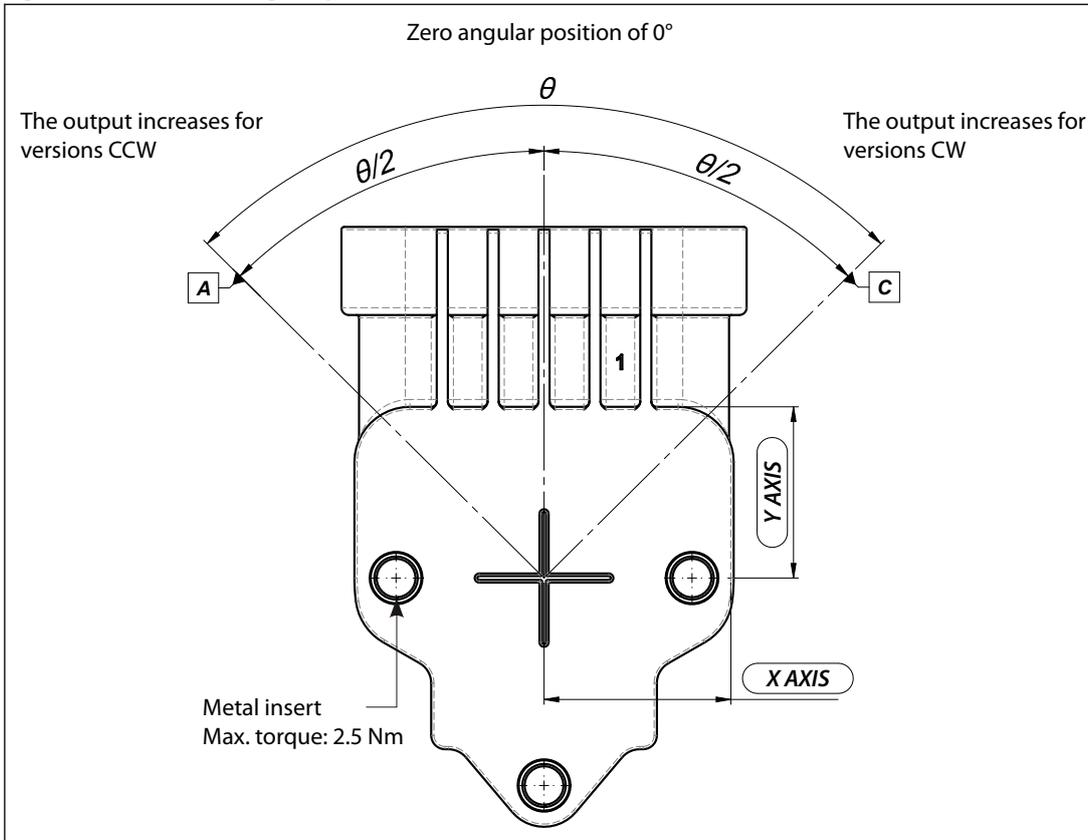


Table 5: General data

Ref.	CW output	CWW output
A	0.5 V DC	4.5 V DC
B	Zero angular position of 0°	Zero angular position of 0°
C	4.5 V DC	0.5 V DC

Figure 4: Cable version, angular positions


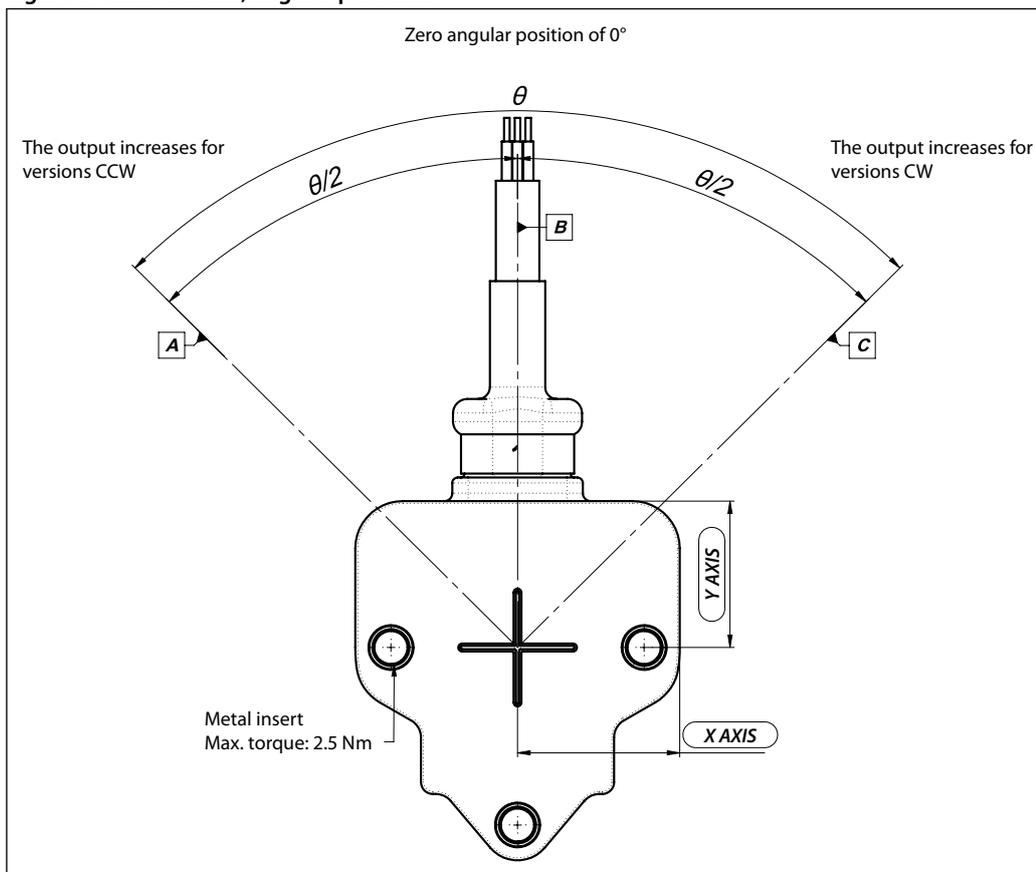


Table 6: General data

Ref.	CW output	CWW output
A	0.5 V DC	4.5 V DC
B	Zero angular position of 0°	Zero angular position of 0°
C	4.5 V DC	0.5 V DC

Figure 7: Cable + M12 version, connections

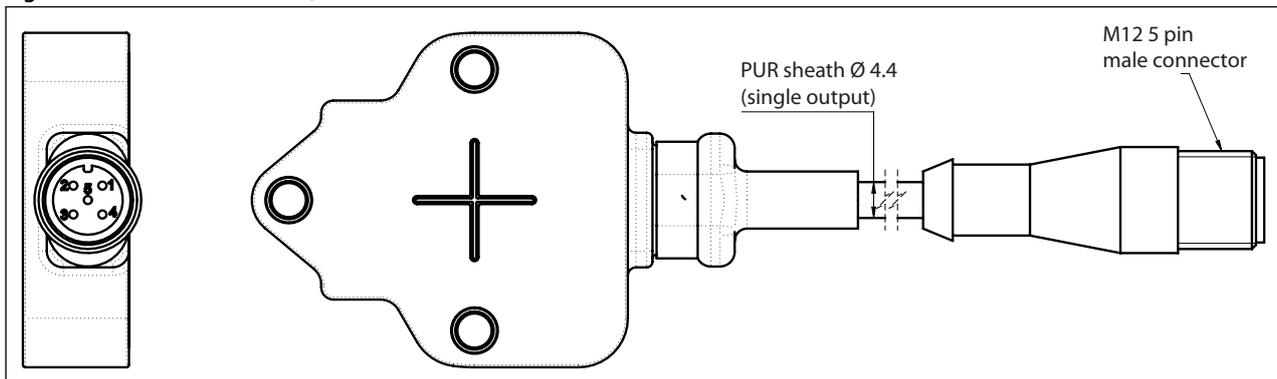

Connections

1	Ground 1
2	+ Supply 1
3	Output 1
4	NC
5	NC

Ordering

Ordering type

Table 7: DST X520, ordering

Type	Output signal	Configurations	Code no.
DST X520 incl. PKIT magnet	5 V Ratiometric	±180° Clockwise CW	098G1500
	5 V Ratiometric	±180° Counterclockwise CCW/CH2 clockwise CW	098G1501
	36 V CANopen	±180° Clockwise CW	098G1502
	36 V SAE J1939	±180° Clockwise CW	098G1503

Ordering code - on request

Electrical connections		
AMP Superseal 6P connector		A
Cable (specify cable length)		F
Circuit type		
Single Analog and half redundant CANopen/ J1939		S
Redundant Analog		R
Angle/Channel 1 (output for single channel)		
(Analog output A1-A2-A3 programmable in steps of ±15°) (CAN/J 1939 = 180)		xxx
Angle/Channel 2 (redundant/half redundant)		
Analog output = same as Channel 1 and (CAN/J 1939 = 000)		xxx
Supply voltage		
+5Vdc (only for A1 output)		L
+9...+36Vdc (see output signal for right supply voltage)		H
Output type		
+0.5...+4.5V DC output (available with supply L = ratiometric output and with supply H = 0.5...4.5V output)		A1
0...+10Vdc output (powered at +11...36V DC)		A2
4...20mA output (powered at +9...36V DC)		A3
CANopen output (powered at +9...36V DC) (available in single version with +/-180° measurement range)		C1
SAE J1939 (powered at +9...36V DC) (available in single version with +/-180° measurement range)		C2
Rotation direction		
Clockwise CW (single) Both clockwise CW (redundant or CAN/J1939)		1
Counterclockwise CCW (single) Both counterclockwise CCW (redundant or CAN/J1939)		2
CHANNEL 1 clockwise CW and CHANNEL 2 counterclockwise CCW (redundant version or CAN/J1939)		3
CHANNEL 1 counterclockwise CCW and CHANNEL 2 clockwise CW (redundant version or CAN/J1939)		4
Cable		
Single cable without connector (always "0" in case of DST X520 A version)		0
Cable + M12, 5-pin male overprinted connector		1
Reserved		00
Linearity curve		
No linearity curve attached		0
Linearity curve to be attached		L
Standard		033

Rotary position sensor, type DST X520

Accessories	
No accessories	X
Shaft kit + magnet D 15 M10 hexagonal (PKIT 384) (Standard)	A
Shaft kit to insert + magnet D 15 (PKIT 389)	B
Kit magnet Ø15 (PKIT 418)	C

Cable length	
100 mm	01
200 mm	02
500 mm	05
1 m	10
2 m	20
Other length on request	-

Example of ordering: DST X520-AS180000HC14000 0033A00

A	AMP Superseal 6p
S	Half redundant CAN/J 1939
180	±180°
000	000
H	+9 - +36 Vdc
C1	CANopen
4	Channel 1: Counterclockwise CCW Channel 2: Clockwise CW
0	No cable
00	Reserved
0	No linearity curve
033	Standard
A	Magnet PKIT384
00	Not defined (only cable version)

Certificates, declarations, and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

Some approvals may change over time. You can check the most current status at danfoss.com or contact your local Danfoss representative if you have any questions.

Table 8: Declarations

Document name	Document type	Document topic	Approval authority
098R0008	EU Declaration	EMCD/ROHS	Danfoss

Approvals and Conformity

- CE
- RoHS
- E1 approval

Online support

Danfoss offers a wide range of support along with our products, including digital product information, software, mobile apps, and expert guidance. See the possibilities below.

The Danfoss Product Store



The Danfoss Product Store is your one-stop shop for everything product related—no matter where you are in the world or what area of the cooling industry you work in. Get quick access to essential information like product specs, code numbers, technical documentation, certifications, accessories, and more.

Start browsing at store.danfoss.com.

Find technical documentation



Find the technical documentation you need to get your project up and running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more.

Start searching now at www.danfoss.com/en/service-and-support/documentation.

Danfoss Learning



Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications, industry topics, and trends that will help you do your job better.

Create your Danfoss Learning account for free at www.danfoss.com/en/service-and-support/learning.

Get local information and support



Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert—all in your own language.

Find your local Danfoss website here: www.danfoss.com/en/choose-region.

Spare Parts



Get access to the Danfoss spare parts and service kit catalog right from your smartphone. The app contains a wide range of components for air conditioning and refrigeration applications, such as valves, strainers, pressure switches, and sensors.

Download the Spare Parts app for free at www.danfoss.com/en/service-and-support/downloads.