
# **SKIIP 35NAB126V10**



3-phase bridge rectifier + brake chopper + 3-phase bridge inverter SKIIP 35NAB126V10

#### **Features**


- Fast Trench IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

### **Typical Applications\***

- Inverter up to 28 kVA
- Typical motor power 15 kW

#### Remarks


• V<sub>CEsat</sub> , V<sub>F</sub>= chip level value





Absolute Maximum Ratings T <sub>s</sub> = 25 °C, unless otherwise specifications								
Symbol	Conditions	Values	Units					
IGBT - Inverter, Chopper								
$V_{CES}$		1200	V					
I <sub>C</sub>	T <sub>s</sub> = 25 (70) °C	73 (55)	Α					
I <sub>CRM</sub>		100	Α					
$V_{GES}$		± 20	V					
T <sub>j</sub>		- 40 <b>+</b> 150	°C					
Diode - Inverter, Chopper								
I <sub>F</sub>	T <sub>s</sub> = 25 (70) °C	62 (46)	Α					
I <sub>FRM</sub>		100	Α					
$T_j$		- 40 <b>+</b> 150	°C					
Diode - Rectifier								
$V_{RRM}$		1600	V					
I <sub>F</sub>	T <sub>s</sub> = 70 °C	67	Α					
I <sub>FSM</sub>	$t_{\rm p}$ = 10 ms, sin 180 °, $T_{\rm i}$ = 25 °C	850	Α					
i²t	$t_p = 10 \text{ ms, sin } 180 ^\circ, T_i = 25 ^\circ\text{C}$	3600	A²s					
$T_j$		- 40 <b>+</b> 150	°C					
Module			•					
I <sub>tRMS</sub>	per power terminal (20 A / spring)	80	Α					
T <sub>stg</sub>		- 40 <b>+</b> 125	°C					
V <sub>isol</sub>	AC, 1 min.	2500	V					


Characteristics			T <sub>s</sub> = 25 °C, unless otherwise specified						
Symbol	Conditions		min.	typ.	max.	Units			
IGBT - Inverter, Chopper									
$V_{CEsat}$ $V_{GE(th)}$ $V_{CE(TO)}$ $r_{T}$ $C_{ies}$	$I_{Cnom}$ = 50 A, $T_j$ = 25 (125) °C $V_{GE}$ = $V_{CE}$ , $I_C$ = 2 mA $T_j$ = 25 (125) °C $T_j$ = 25 (125) °C $V_{CE}$ = 25 V, $V_{GE}$ = 0 V, f = 1 MHz		5	1,7 (2) 5,8 1 (0,9) 14 (22) 3,7	2,1 (2,4) 6,5 1,2 (1,1) 18 (26)	V V V mΩ nF			
C <sub>oes</sub> C <sub>res</sub> R <sub>th(j-s)</sub>	$V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}, f = 1 \text{ MHz}$ $V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}, f = 1 \text{ MHz}$ per IGBT			0,8 0,7 0,55		nF nF K/W			
$\begin{aligned} & t_{d(on)} \\ & t_{r} \\ & t_{d(off)} \\ & t_{f} \\ & E_{on} \\ & E_{off} \end{aligned}$	under following conditions $V_{CC}$ = 600 V, $V_{GE}$ = ± 15 V $I_{Cnom}$ = 50 A, $T_j$ = 125°C $R_{Gon}$ = $R_{Goff}$ = 12 $\Omega$ inductive load			85 30 430 90 6,5 6,1		ns ns ns ns mJ			
	nverter, Chopper					1			
$V_{F} = V_{EC}$ $V_{(TO)}$ $r_{T}$ $R_{th(j-s)}$ $I_{RRM}$ $Q_{rr}$ $E_{rr}$	$\begin{split} I_{Fnom} &= 50 \text{ A, T}_j = 25 \text{ (125) °C} \\ T_j &= 25 \text{ (125) °C} \\ T_j &= 25 \text{ (125) °C} \\ \text{per diode} \\ \text{under following conditions} \\ I_{Fnom} &= 50 \text{ A, V}_R = 600 \text{ V} \\ \text{V}_{GE} &= 0 \text{ V, T}_j = 125 °C} \\ \text{di}_F/\text{dt} &= 1900 \text{ A/}\mu\text{s} \end{split}$			1,6 (1,6) 1 (0,8) 12 (16) 1 71 11,5 4,7	1,8 (1,8) 1,1 (0,9) 14 (18)	V V mΩ K/W A μC mJ			
Diode - R	ectifier								
$V_{F}$ $V_{(TO)}$ $r_{T}$ $R_{th(j-s)}$	$I_{Fnom}$ = 40 A, $T_j$ = 25 °C $T_j$ = 125 °C $T_j$ = 125 °C per diode			1,1 0,8 9 0,85		V V mΩ K/W			
	Temperature Sensor								
R <sub>ts</sub>	3 %, T <sub>r</sub> = 25 (100) °C			1000(1670)		Ω			
Mechanic w			2	95	2.5	g			
$M_s$	Mounting torque		2		2,5	Nm			


# **SKiiP 35NAB126V10**

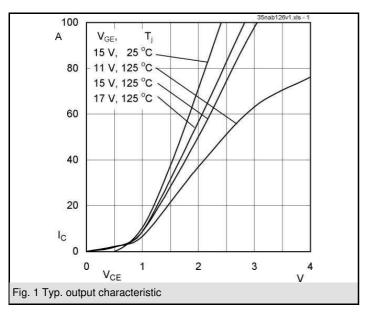


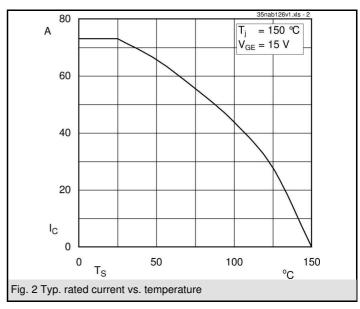

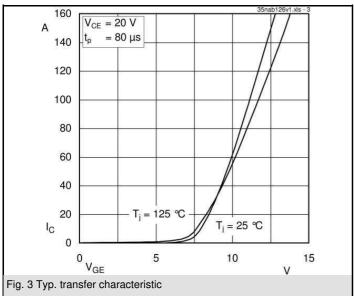


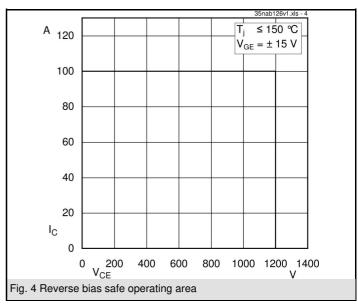


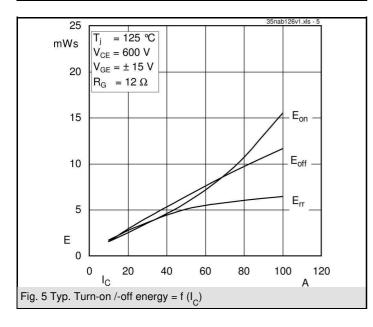


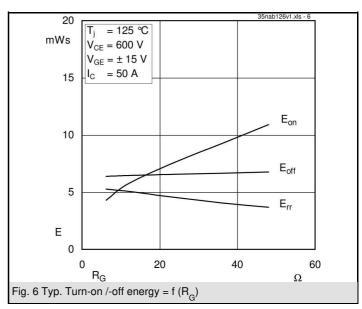


# SKiiP 35NAB126V10

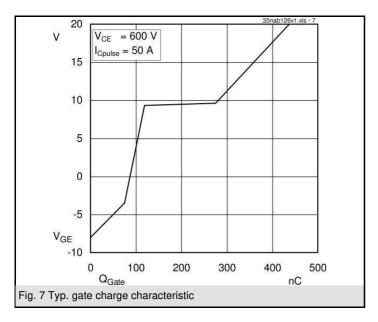

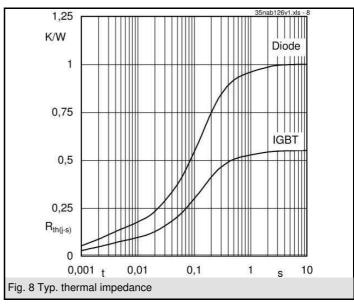


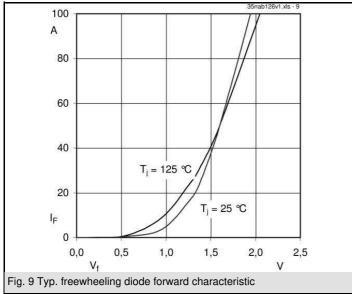


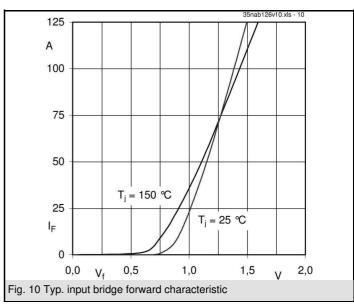

3 27-01-2010 LAN © by SEMIKRON

# **SKIIP 35NAB126V10**

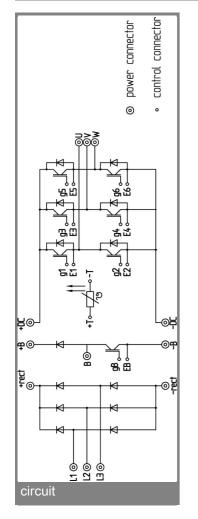

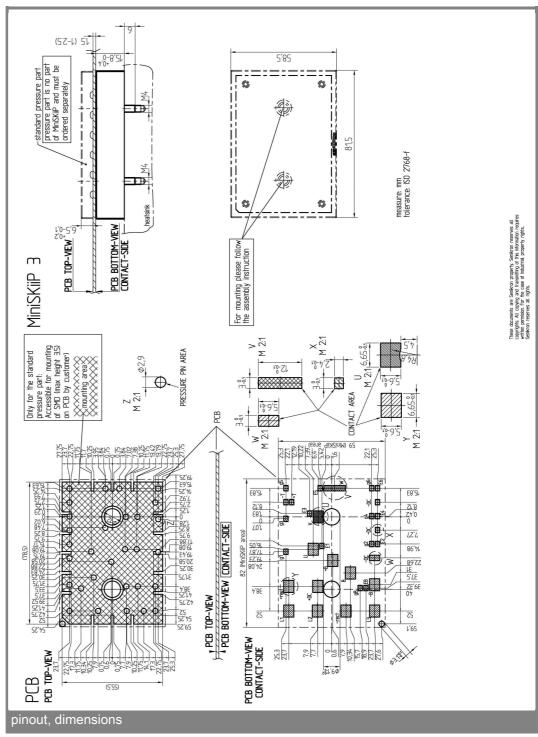

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

<sup>\*</sup> The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.