


# SKiiP 28AHB16V1

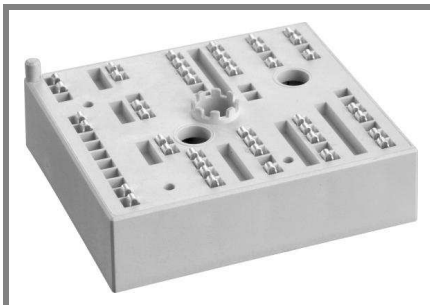

MiniSKiiP® 2

3-phase bridge rectifier +  
brake chopper

SKiiP 28AHB16V1

## Features

- Fast Trench IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

## Typical Applications\*


- Input bridge for inverter up to 39 kVA

## Remarks

- $V_{CEsat}$ ,  $V_F$  = chip level value







Absolute Maximum Ratings		$T_s = 25\text{ °C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
<b>IGBT - Chopper</b>			
$V_{CES}$		1200	V
$I_C$	$T_s = 25\text{ (70) °C}$	118 (88)	A
$I_{CRM}$	$t_p \leq 1\text{ ms}$	210	A
$V_{GES}$		$\pm 20$	V
$T_j$		- 40 ... + 150	°C
<b>Diode - Chopper</b>			
$I_F$	$T_s = 25\text{ (70) °C}$	118 (88)	A
$I_{FRM}$	$t_p \leq 1\text{ ms}$	210	A
$T_j$		- 40 ... + 150	°C
<b>Diode / Thyristor - Rectifier</b>			
$V_{RRM}$		1600	V
$I_F / I_T$	$T_s = 70$	82	A
$I_{FSM} / I_{TSM}$	$t_p = 10\text{ ms}$ , sin 180°, $T_j = 25\text{ °C}$	1000	A
$i^2t$	$t_p = 10\text{ ms}$ , sin 180°, $T_j = 25\text{ °C}$	5500	A <sup>2</sup> s
$T_j$	Diode	- 40 ... + 150	°C
$T_j$	Thyristor	- 40 ... + 125	°C
$I_{RMS}$	per power terminal (20 A / spring)	120	A
$T_{stg}$	$T_{op} \leq T_{stg}$	- 40 ... + 125	°C
$V_{isol}$	AC, 1 min.	2500	V

Characteristics		$T_s = 25\text{ °C}$ , unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
<b>IGBT - Chopper</b>					
$V_{CEsat}$	$I_{Cnom} = 105\text{ A}$ , $T_j = 25\text{ (125) °C}$		1,7 (2)	2,1 (2,4)	V
$V_{GE(th)}$	$V_{GE} = V_{CE}$ , $I_C = 3\text{ mA}$	5	5,8	6,5	V
$V_{CE(TO)}$	$T_j = 25\text{ (125) °C}$		1 (0,9)	1,2 (1,1)	V
$r_T$	$T_j = 25\text{ (125) °C}$		6,7 (10)	8,6 (12)	mΩ
$C_{ies}$	$V_{CE} = 25\text{ V}$ , $V_{GE} = 0\text{ V}$ , $f = 1\text{ MHz}$		8,4		nF
$C_{oes}$	$V_{CE} = 25\text{ V}$ , $V_{GE} = 0\text{ V}$ , $f = 1\text{ MHz}$		1,5		nF
$C_{res}$	$V_{CE} = 25\text{ V}$ , $V_{GE} = 0\text{ V}$ , $f = 1\text{ MHz}$		1,1		nF
$R_{th(j-s)}$	per IGBT		0,4		K/W
$t_{d(on)}$	under following conditions		65		ns
$t_r$	$V_{CC} = 600\text{ V}$ , $V_{GE} = \pm 15\text{ V}$		30		ns
$t_{d(off)}$	$I_{Cnom} = 105\text{ A}$ , $T_j = 125\text{ °C}$		410		ns
$t_f$	$R_{Gon} = R_{Goff} = 5,5\text{ Ω}$		100		ns
$E_{on}$	inductive load		14,4		mJ
$E_{off}$			13,3		mJ
<b>Diode - Chopper</b>					
$V_F = V_{EC}$	$I_{Fnom} = 105\text{ A}$ , $T_j = 25\text{ (125) °C}$		1,6 (1,6)	1,8 (1,8)	V
$V_{(TO)}$	$T_j = 25\text{ (125) °C}$		1 (0,8)	1,1 (0,9)	V
$r_T$	$T_j = 25\text{ (125) °C}$		5,7 (7,6)	6,7 (8,6)	mΩ
$R_{th(j-s)}$	per diode		0,55		K/W
$I_{RRM}$	under following conditions		160		A
$Q_{rr}$	$I_{Fnom} = 105\text{ A}$ , $V_R = 600\text{ V}$		26		μC
$E_{rr}$	$V_{GE} = 0\text{ V}$ , $T_j = 125\text{ °C}$		10,8		mJ
	$di_F/dt = 5400\text{ A/μs}$				

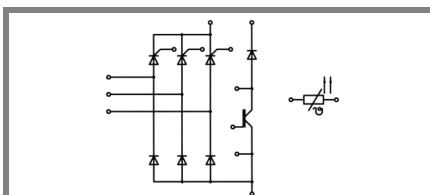

AHB

Characteristics		$T_s = 25\text{ °C}$ , unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
<b>Diode - Rectifier</b>					
$V_F$	$I_{Fnom} = 75\text{ A}$ , $T_j = 25\text{ °C}$		1,2		V
$V_{T(TO)}$	$T_j = 150\text{ °C}$		0,8		V
$r_T$	$T_j = 150\text{ °C}$		7		mΩ
$R_{th(j-s)}$	per diode		0,7		K/W
<b>Thyristor - Rectifier</b>					
$V_T$	$I_{Fnom} = 120\text{ A}$ , $T_j = 25\text{ (125) °C}$			1,8 (1,7)	V
$V_{T(TO)}$	$T_j = 125\text{ °C}$			1,1	V
$r_T$	$T_j = 125\text{ °C}$			5	mΩ
$V_{GT}$	$T_j = 25\text{ °C}$			3	V
$I_{GT}$	$T_j = 25\text{ °C}$	150			mA
$I_H$	$T_j = 25\text{ °C}$		200		mA
$I_L$	$T_j = 25\text{ °C}$		400		mA
$dv/dt_{(cr)}$	$T_j = 125\text{ °C}$			1000	V/μs
$di/dt_{(cr)}$	$T_j = 125\text{ °C}$			50	A/μs
$R_{th(j-s)}$	per thyristor		0,65		K/W
<b>Temperature Sensor</b>					
$R_{ts}$	3 %, $T_r = 25\text{ (100) °C}$		1000(1670)		Ω
<b>Mechanical Data</b>					
w			65		g
$M_s$	Mounting torque	2		2,5	Nm

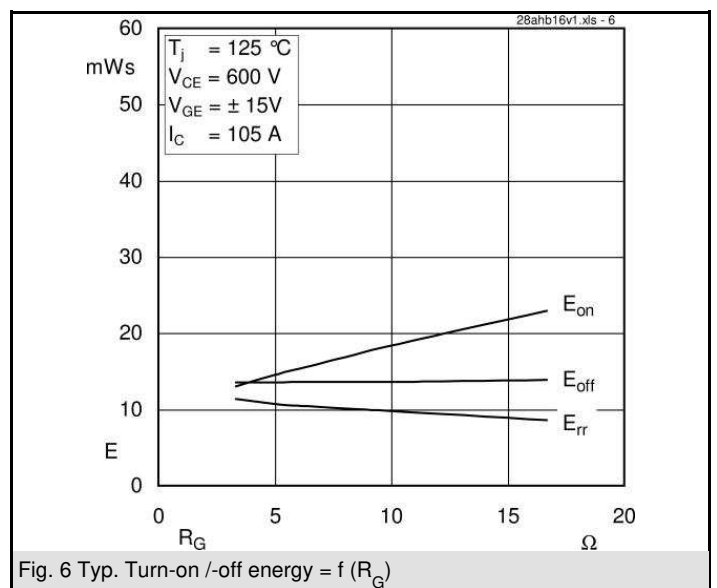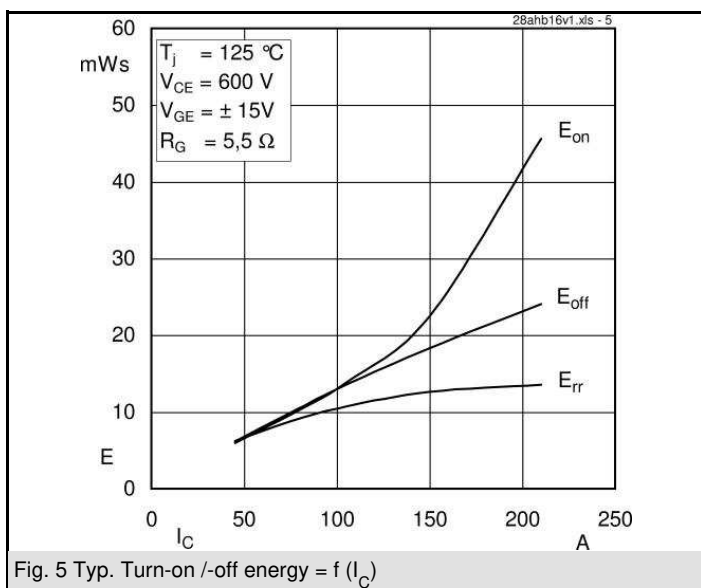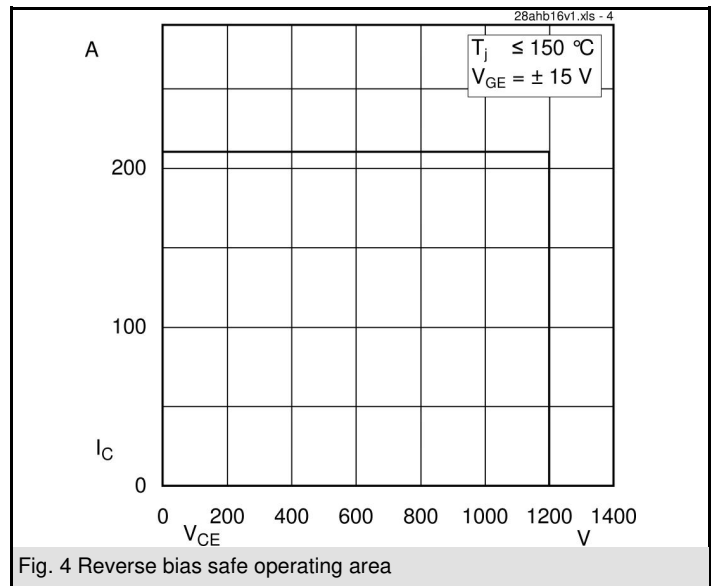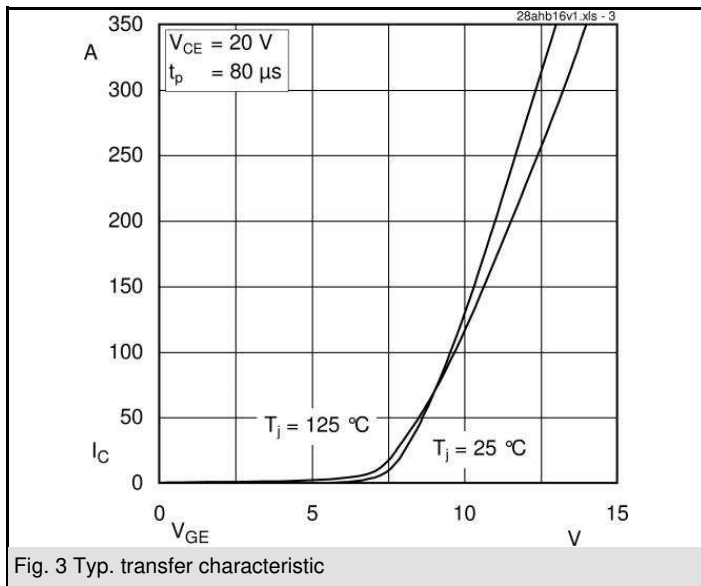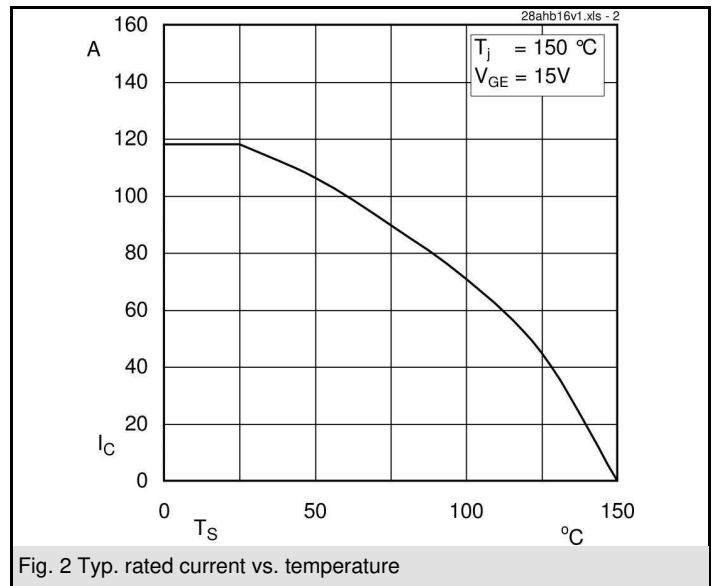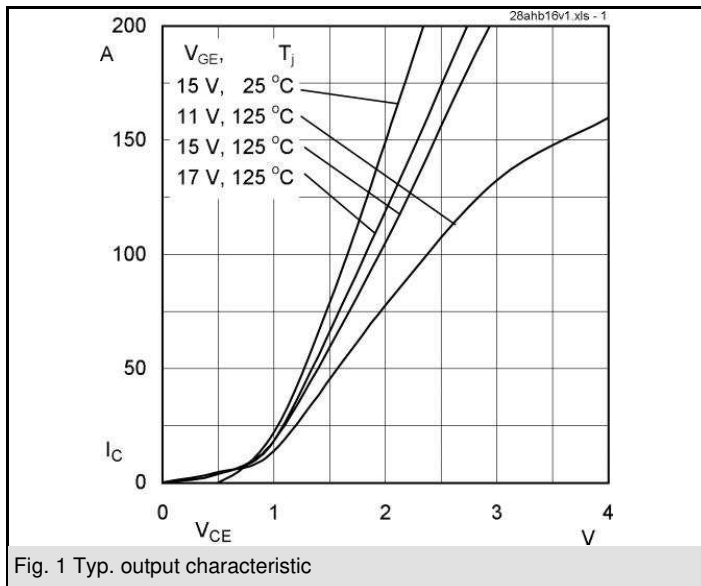

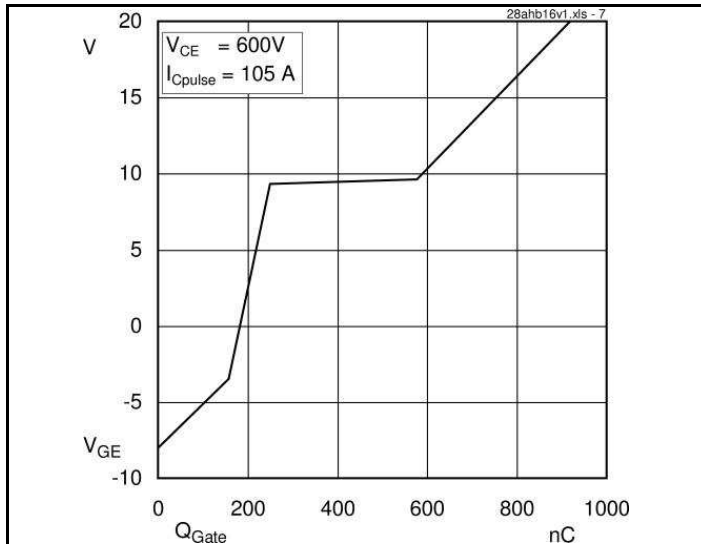


Fig. 7 Typ. gate charge characteristic

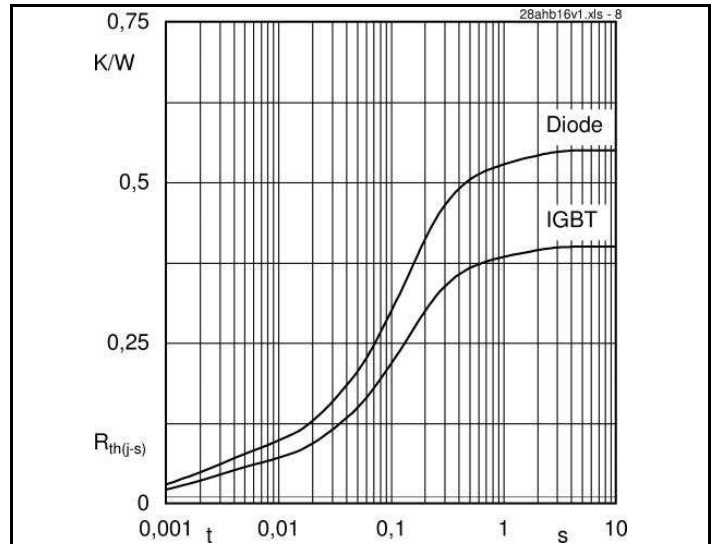


Fig. 8 Typ. thermal impedance

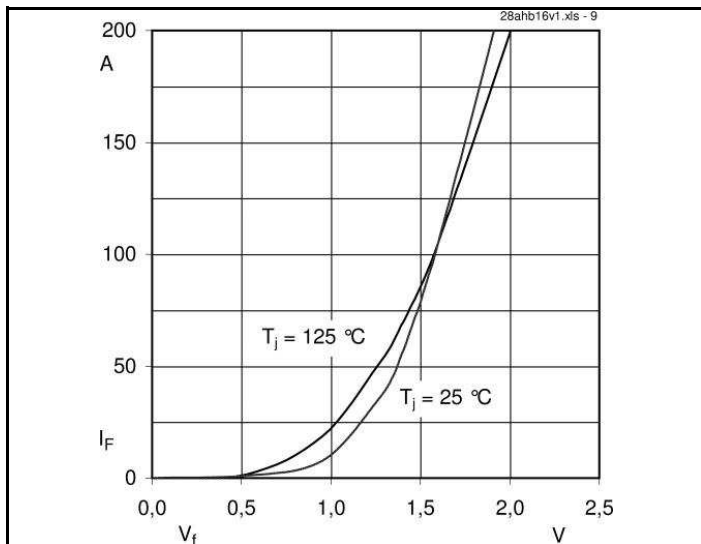


Fig. 9 Typ. freewheeling diode forward characteristic

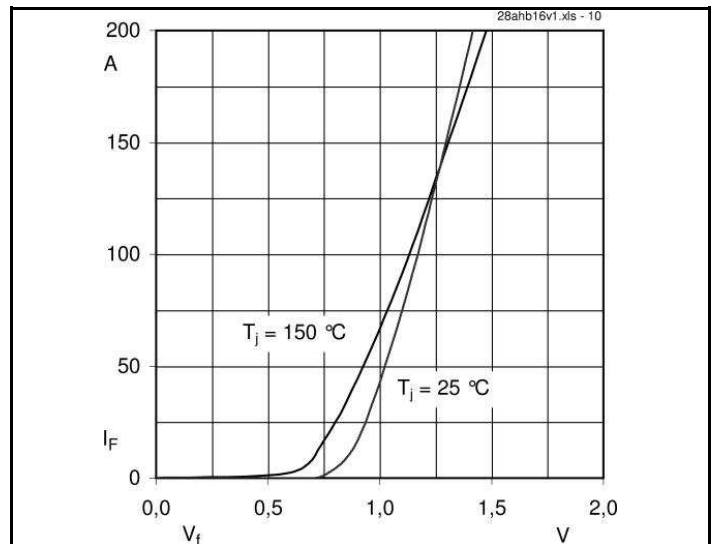


Fig. 10 Typ. input bridge forward characteristic



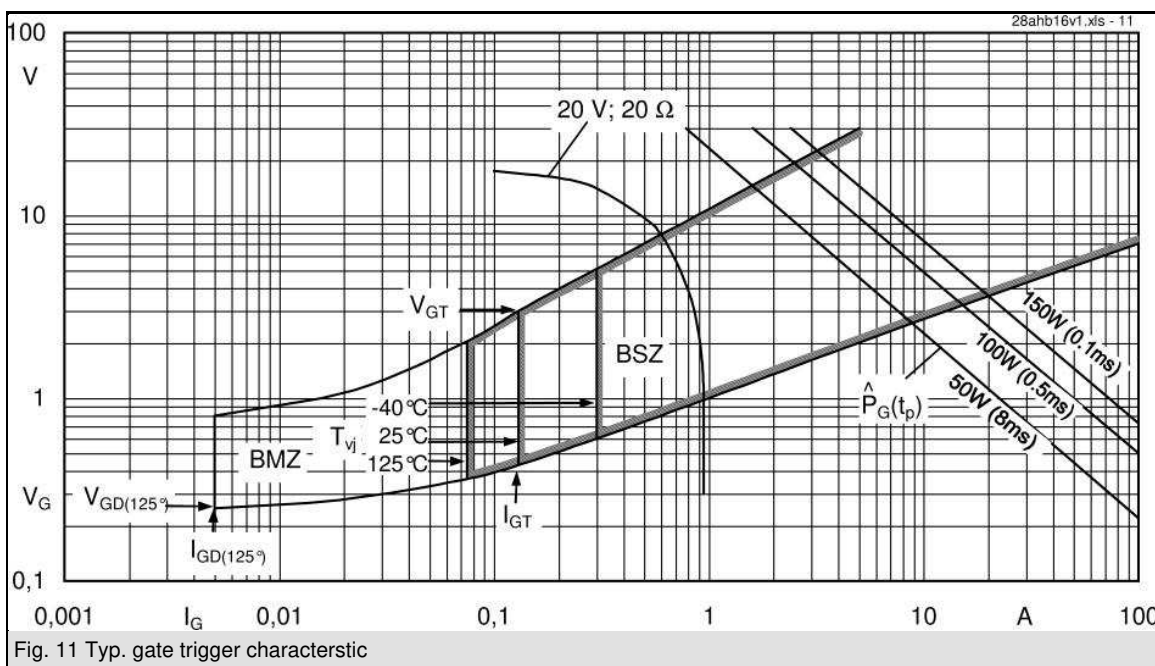


Fig. 11 Typ. gate trigger characteristic

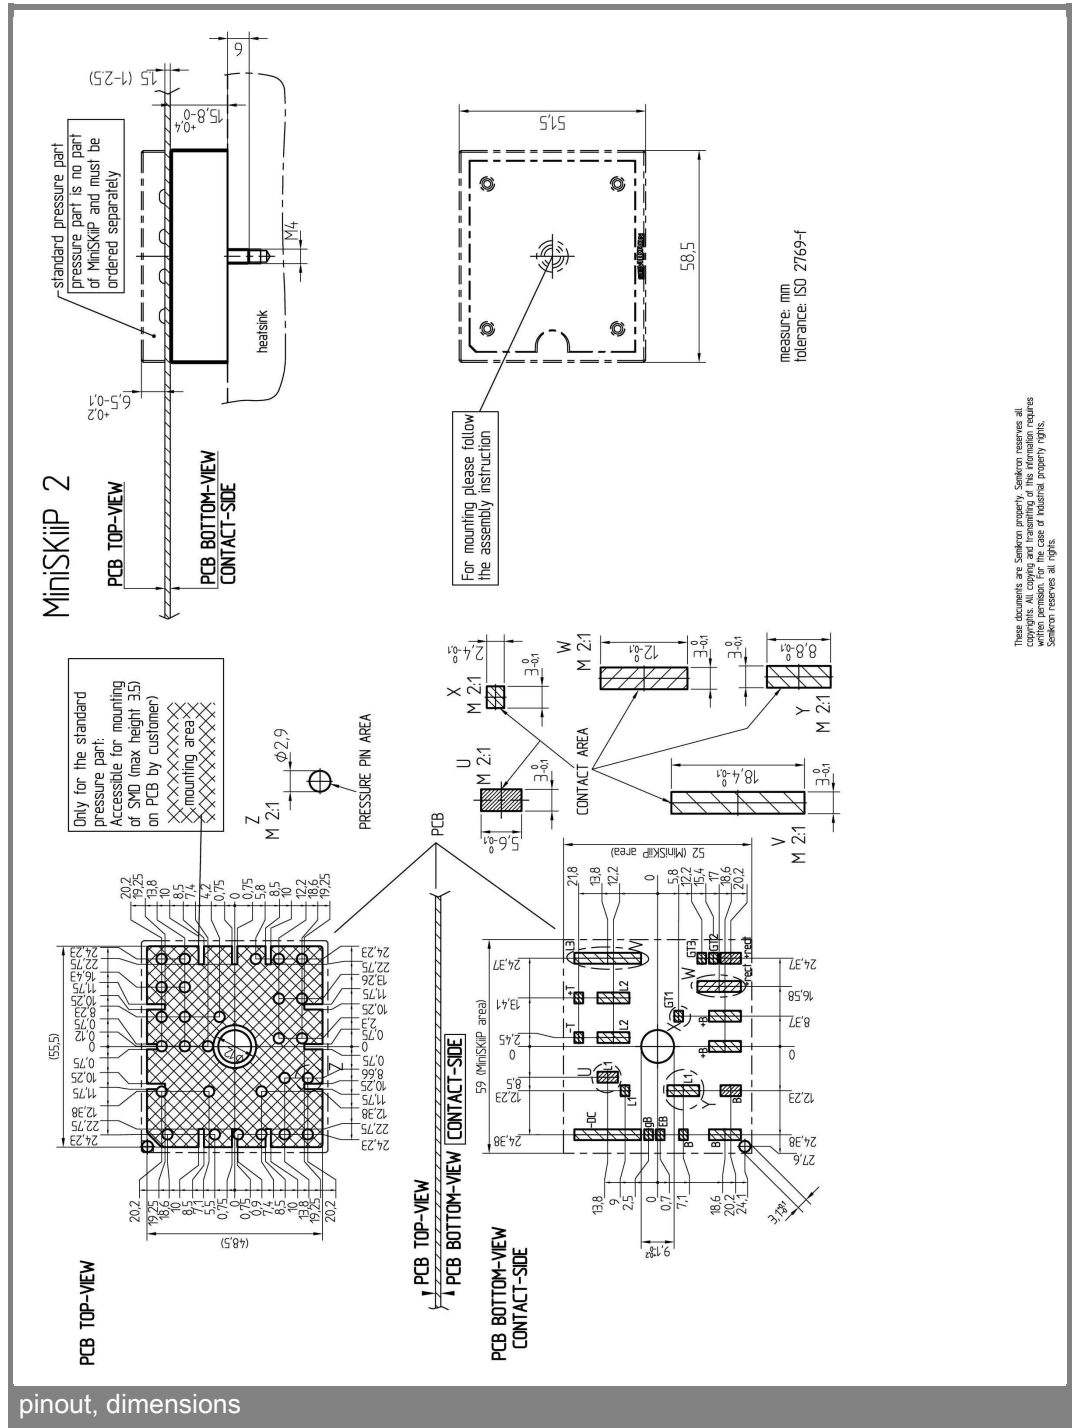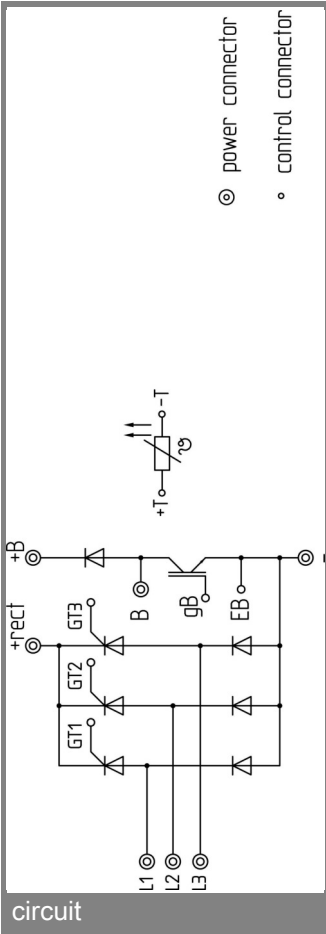

These documents are SEMIKRON property. SEMIKRON reserves all copyrights. All copying and reprinting of this information requires written permission for the case of industrial property rights. SEMIKRON reserves all rights.

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.