ENGINEERING
TOMORROW

Danfoss ECaqua™ 9T

Twin conductor heating cable for frost protection inside water pipes.

Features:

- Approved for drinking water (GDV)
- Inside water pipes installation
- Wide range, up to 150 m
- Fits both ¾" and 1" pipes

20-year

full service warranty to give you full peace of mind

heating.danfoss.com

ENGINEERING
TOMORROW

Danfoss ECaqua™ 9T technical data

Cable construction	Twin conductor with cold lead and ¾" and 1" pipe fitting
Cable shape	Round
Diameter	7 mm
Nominal voltage	230 V~
Conductor insulation	XLPE
Outer sheath	Light blue, MDPE
Screen	Alu-foil 100% coverage
Max water temperature	23 °C
Max. water pressure	10 Bar
Warranty	DEVIwarranty™ 20 years

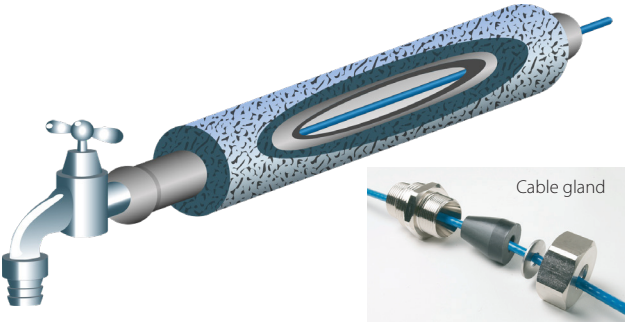

In wintertime problems with frost in fresh water, waste water, cooling water, supply water or sprinkler systems can be avoided with help of heating cable ECaqua™ 9T.

The ECaqua™ 9T is a series resistive, full screened, twin conductor heating cable. The cable is developed and approved for being installed inside drinking water pipes, according to modern Danish GDV norms.

The heating cable is supplied in readymade lengths with a ¾" and 1" fitting to establish a water tight entrance for the heating cable into the drinking water pipe. It is equipped with a UV stable cold lead with solid conductors ensuring fast installation with a clearly visible connection.

The ECaqua™ 9T is designed with output of 9 W/m at 230 V, as it has been evaluated to give a good balance between needed output and long-term use of the product.

Danfoss A/S · Heating segment · 7100 Vejle · Denmark
Tel: +45 7488 8500 · Email: heating@danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved

© Copyright Danfoss | 2018.02