

SK 70 KQ



SEMITOP® 1

Antiparallel Thyristor Module

SK 70 KQ

Features


- Compact Design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DBC)
- Glass passivated thyristor chips
- Up to 1600V reverse voltage
- UL recognized, file no. E 63 532

Typical Applications*

- Soft starters
- Light control (studios, theaters...)
- Temperature control

V_{RSM} V	V_{RRM}, V_{DRM} V	$I_{RMS} = 72 \text{ A A (full conduction)}$ ($T_s = 85^\circ \text{C}$)
900	800	SK 70 KQ 08
1300	1200	SK 70 KQ 12
1700	1600	SK 70 KQ 16

Symbol	Conditions	Values	Units
I_{RMS}	W1C ; sin. 180° ; $T_s = 100^\circ \text{C}$ W1C ; sin. 180° ; $T_s = 85^\circ \text{C}$	50 72	A A
I_{TSM}	$T_{vj} = 25^\circ \text{C}$; 10 ms $T_{vj} = 125^\circ \text{C}$; 10 ms	1000 900	A A
i^2t	$T_{vj} = 25^\circ \text{C}$; 8,3...10 ms $T_{vj} = 125^\circ \text{C}$; 8,3...10 ms	5000 4000	A ² s A ² s
V_T $V_{T(TO)}$ r_T	$T_{vj} = 25^\circ \text{C}$, $I_T = 120 \text{ A}$ $T_{vj} = 125^\circ \text{C}$ $T_{vj} = 125^\circ \text{C}$	max. 1,8 max. 1 max. 6	V V mΩ
I_{DD}, I_{RD}	$T_{vj} = 25^\circ \text{C}$, $V_{RD} = V_{RRM}$ $T_{vj} = 125^\circ \text{C}$, $V_{RD} = V_{RRM}$	max. 0,5 max. 15	mA mA
t_{gd} t_{gr}	$T_{vj} = 25^\circ \text{C}$, $I_G = 1 \text{ A}$; $di_G/dt = 1 \text{ A}/\mu\text{s}$ $V_D = 0,67 \cdot V_{DRM}$	1 2	μs μs
$(dv/dt)_{cr}$ $(di/dt)_{cr}$	$T_{vj} = 125^\circ \text{C}$ $T_{vj} = 125^\circ \text{C}$; $f = 50...60 \text{ Hz}$	1000 50	V/μs A/μs
t_q I_H	$T_{vj} = 125^\circ \text{C}$; typ. $T_{vj} = 25^\circ \text{C}$; typ. / max.	80 100 / 200	μs mA
I_L	$T_{vj} = 25^\circ \text{C}$; $R_G = 33 \Omega$; typ. / max.	200 / 400	mA
V_{GT} I_{GT} V_{GD} I_{GD}	$T_{vj} = 25^\circ \text{C}$; d.c. $T_{vj} = 25^\circ \text{C}$; d.c. $T_{vj} = 125^\circ \text{C}$; d.c. $T_{vj} = 125^\circ \text{C}$; d.c.	min. 2 min. 100 max. 0,25 max. 5	V mA V mA
$R_{th(j-s)}$ $R_{th(j-s)}$ T_{vj} T_{stg} T_{solder}	cont. per thyristor sin 180° per thyristor cont. per W1C sin 180° per W1C terminals, 10s	0,8 0,84 0,4 0,42 -40 ... +125 -40 ... +125 260	K/W K/W K/W K/W °C °C °C
V_{isol} M_s M_t a m	a. c. 50 Hz; r.m.s.; 1 s / 1 min. Mounting torque to heatsink	3000 / 2500 1,5 13	V~ Nm Nm m/s ² g
Case	SEMITOP® 1	T 1	

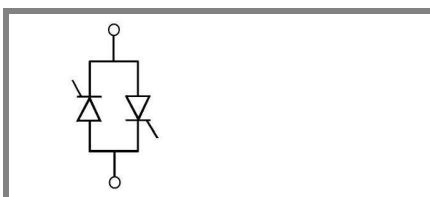

KQ

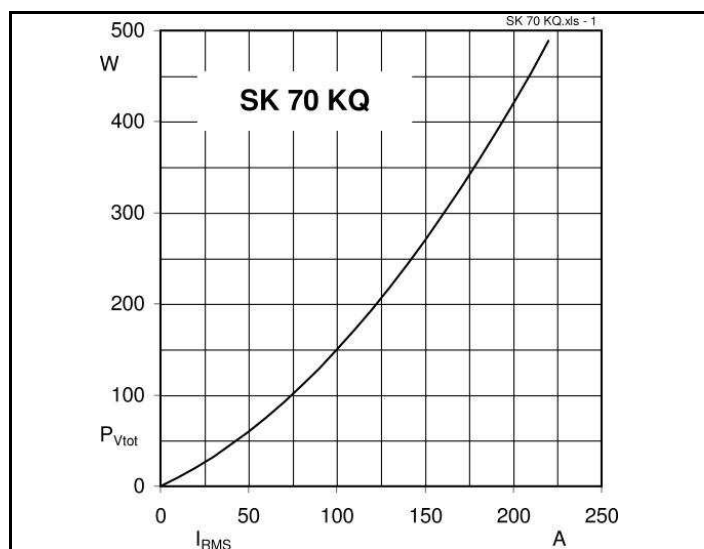


Fig. 1 Power dissipation per module vs. r.m.s. current

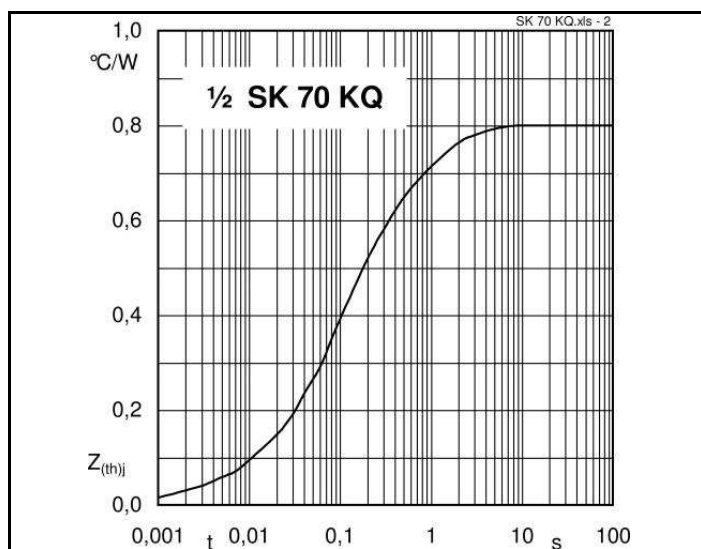


Fig. 2 Transient thermal impedance vs. time

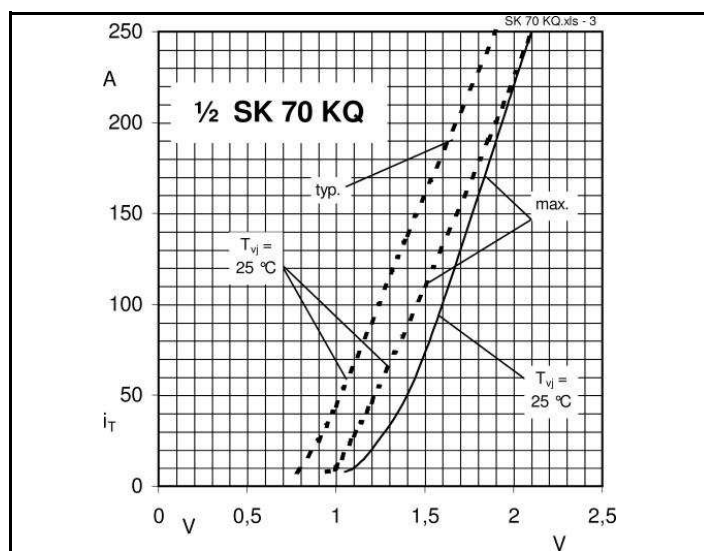


Fig. 3 On-state characteristics

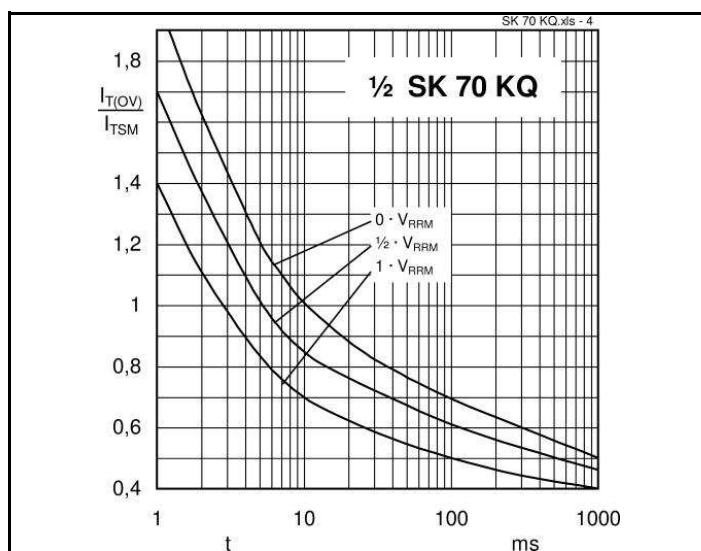


Fig. 4 Surge overload current vs. time



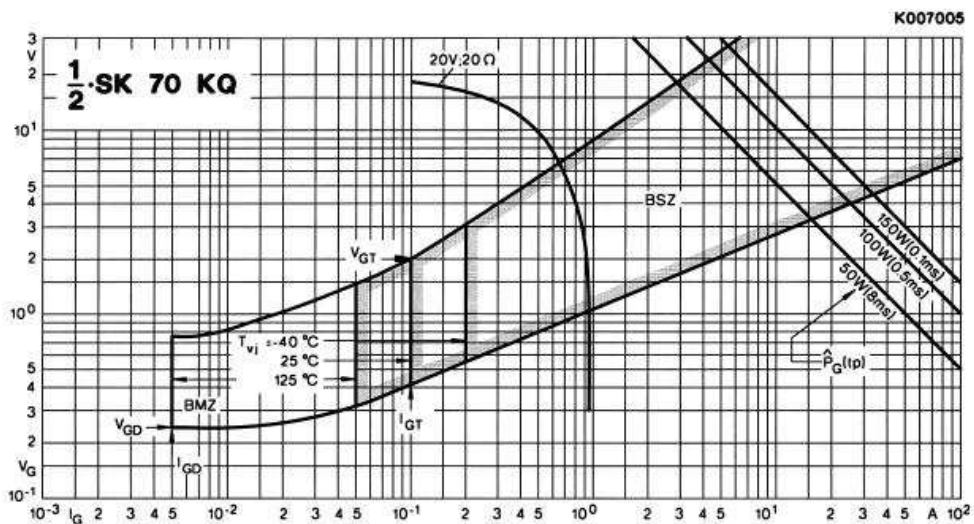




Fig. 5 Gate trigger characteristics

Dimensions in mm

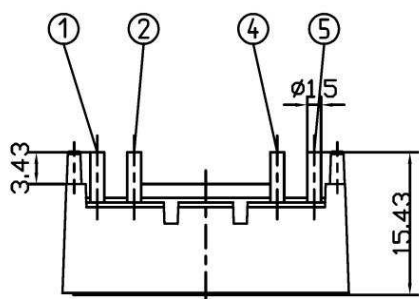

Case T1

KQ

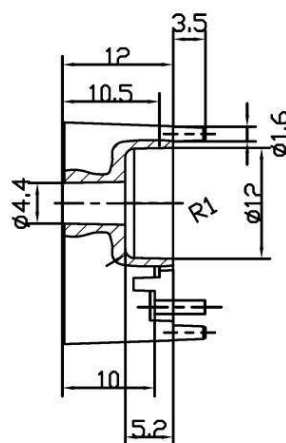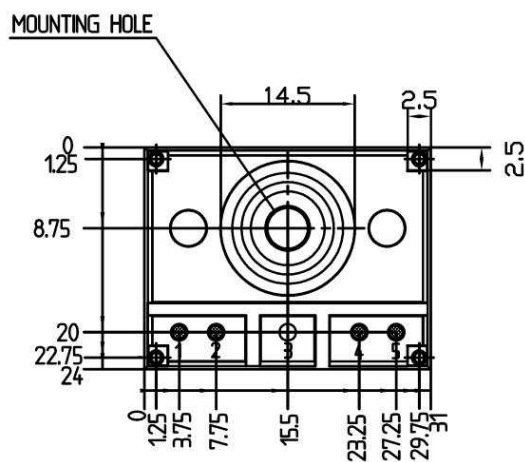

Case T 1 (Suggested hole diameter in the PCB for solder pins and mounting pins: 2mm)

This is an electrostatic discharge sensitive device (ESDS) due to international standard IEC 61340.

***IMPORTANT INFORMATION AND WARNINGS**

The specifications of SEMIKRON products may not be considered as guarantee or assurance of product characteristics ("Beschaffenheitsgarantie"). The specifications of SEMIKRON products describe only the usual characteristics of products to be expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance. Application adjustments may be necessary. The user of SEMIKRON products is responsible for the safety of their applications embedding SEMIKRON products and must take adequate safety measures to prevent the applications from causing a physical injury, fire or other problem if any of SEMIKRON products become faulty. The user is responsible to make sure that the application design is compliant with all applicable laws, regulations, norms and standards. Except as otherwise explicitly approved by SEMIKRON in a written document signed by authorized representatives of SEMIKRON, SEMIKRON products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury. No representation or warranty is given and no liability is assumed with respect to the accuracy, completeness and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. SEMIKRON does not assume any liability arising out of the applications or use of any product; neither does it convey any license under its patent rights, copyrights, trade secrets or other intellectual property rights, nor the rights of others. SEMIKRON makes no representation or warranty of non-infringement or alleged non-infringement of intellectual property rights of any third party which may arise from applications. Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the nearest SEMIKRON sales office. This document supersedes and replaces all information previously supplied and may be superseded by updates. SEMIKRON reserves the right to make changes.