


# SKiiP 39ANB16V1

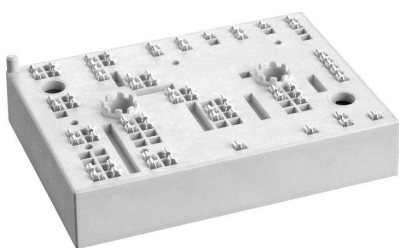

MiniSKiiP® 3

3-phase bridge rectifier +  
brake chopper

SKiiP 39ANB16V1

## Features


- Fast Trench IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

## Typical Applications\*

- Input bridge for Inverter up to 45 kVA

## Remarks







- $V_{CEsat}$ ,  $V_F$  = chip level value









ANB

| Absolute Maximum Ratings  |                                    | T <sub>s</sub> = 25 °C, unless otherwise specified |                  |
|---------------------------|------------------------------------|----------------------------------------------------|------------------|
| Symbol                    | Conditions                         | Values                                             | Units            |
| IGBT - Inverter, Chopper  |                                    |                                                    |                  |
| V <sub>CES</sub>          | T <sub>s</sub> = 25 (70) °C        | 1200                                               | V                |
| I <sub>C</sub>            |                                    | 157 (118)                                          | A                |
| I <sub>CRM</sub>          |                                    | 280                                                | A                |
| V <sub>GES</sub>          |                                    | ± 20                                               | V                |
| T <sub>j</sub>            |                                    | - 40 ... + 150                                     | °C               |
| Diode - Inverter, Chopper |                                    |                                                    |                  |
| I <sub>F</sub>            | T <sub>s</sub> = 25 (70) °C        | 167 (124)                                          | A                |
| I <sub>FRM</sub>          |                                    | 280                                                | A                |
| T <sub>j</sub>            |                                    | - 40 ... + 150                                     | °C               |
| Diode - Rectifier         |                                    |                                                    |                  |
| V <sub>RRM</sub>          | T <sub>s</sub> = 70 °C             | 1600                                               | V                |
| I <sub>F</sub>            |                                    | 124                                                | A                |
| I <sub>FSM</sub>          |                                    | 1600                                               | A                |
| i <sup>2</sup> t          |                                    | 14500                                              | A <sup>2</sup> s |
| T <sub>j</sub>            |                                    | - 40 ... + 150                                     | °C               |
| Module                    |                                    |                                                    |                  |
| I <sub>tRMS</sub>         | per power terminal (20 A / spring) | 160                                                | A                |
| T <sub>stg</sub>          |                                    | - 40 ... + 125                                     | °C               |
| V <sub>isol</sub>         | AC, 1 min.                         | 2500                                               | V                |

| Characteristics                  |                                                                               | $T_s = 25\text{ °C}$ , unless otherwise specified |            |           |       |
|----------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------|------------|-----------|-------|
| Symbol                           | Conditions                                                                    | min.                                              | typ.       | max.      | Units |
| <b>IGBT - Inverter, Chopper</b>  |                                                                               |                                                   |            |           |       |
| $V_{CEsat}$                      | $I_{Cnom} = 140\text{ A}$ , $T_j = 25\text{ (125) °C}$                        |                                                   | 1,7 (2)    | 2,1 (2,4) | V     |
| $V_{GE(th)}$                     | $V_{GE} = V_{CE}$ , $I_C = 6\text{ mA}$                                       | 5                                                 | 5,8        | 6,5       | V     |
| $V_{CE(TO)}$                     | $T_j = 25\text{ (125) °C}$                                                    |                                                   | 1 (0,9)    | 1,2 (1,1) | V     |
| $r_T$                            | $T_j = 25\text{ (125) °C}$                                                    |                                                   | 5 (7,9)    | 6,4 (9,3) | mΩ    |
| $C_{ies}$                        | $V_{CE} = 25\text{ V}$ , $V_{GE} = 0\text{ V}$ , $f = 1\text{ MHz}$           |                                                   | 11,2       |           | nF    |
| $C_{oes}$                        | $V_{CE} = 25\text{ V}$ , $V_{GE} = 0\text{ V}$ , $f = 1\text{ MHz}$           |                                                   | 1,9        |           | nF    |
| $C_{res}$                        | $V_{CE} = 25\text{ V}$ , $V_{GE} = 0\text{ V}$ , $f = 1\text{ MHz}$           |                                                   | 1,5        |           | nF    |
| $R_{th(j-s)}$                    | per IGBT                                                                      |                                                   | 0,3        |           | K/W   |
| $t_{d(on)}$                      | under following conditions                                                    |                                                   | 80         |           | ns    |
| $t_r$                            | $V_{CC} = 600\text{ V}$ , $V_{GE} = \pm 15\text{ V}$                          |                                                   | 40         |           | ns    |
| $t_{d(off)}$                     | $I_{Cnom} = 140\text{ A}$ , $T_j = 125\text{ °C}$                             |                                                   | 500        |           | ns    |
| $t_f$                            | $R_{Gon} = R_{Goff} = 5\text{ Ω}$                                             |                                                   | 100        |           | ns    |
| $E_{on}$                         | inductive load                                                                |                                                   | 19,9       |           | mJ    |
| $E_{off}$                        |                                                                               |                                                   | 17,2       |           | mJ    |
| <b>Diode - Inverter, Chopper</b> |                                                                               |                                                   |            |           |       |
| $V_F = V_{EC}$                   | $I_{Fnom} = 140\text{ A}$ , $T_j = 25\text{ (125) °C}$                        |                                                   | 1,5 (1,5)  | 1,7 (1,7) | V     |
| $V_{(TO)}$                       | $T_j = 25\text{ (125) °C}$                                                    |                                                   | 1 (0,8)    | 1,1 (0,9) | V     |
| $r_T$                            | $T_j = 25\text{ (125) °C}$                                                    |                                                   | 3,6 (5)    | 4,3 (5,7) | mΩ    |
| $R_{th(j-s)}$                    | per diode                                                                     |                                                   | 0,4        |           | K/W   |
| $I_{RRM}$                        | under following conditions                                                    |                                                   | 210        |           | A     |
| $Q_{rr}$                         | $I_{Fnom} = 140\text{ A}$ , $V_R = 600\text{ V}$                              |                                                   | 38         |           | μC    |
| $E_{rr}$                         | $V_{GE} = 0\text{ V}$ , $T_j = 125\text{ °C}$<br>$di_F/dt = 4300\text{ A/μs}$ |                                                   | 16,2       |           | mJ    |
| <b>Diode - Rectifier</b>         |                                                                               |                                                   |            |           |       |
| $V_F$                            | $I_{Fnom} = 90\text{ A}$ , $T_j = 25\text{ °C}$                               |                                                   | 1,2        |           | V     |
| $V_{(TO)}$                       | $T_j = 150\text{ °C}$                                                         |                                                   | 0,8        |           | V     |
| $r_T$                            | $T_j = 150\text{ °C}$                                                         |                                                   | 4          |           | mΩ    |
| $R_{th(j-s)}$                    | per diode                                                                     |                                                   | 0,5        |           | K/W   |
| <b>Temperature Sensor</b>        |                                                                               |                                                   |            |           |       |
| $R_{ts}$                         | 3 %, $T_r = 25\text{ (100) °C}$                                               |                                                   | 1000(1670) |           | Ω     |
| <b>Mechanical Data</b>           |                                                                               |                                                   |            |           |       |
| w                                |                                                                               |                                                   | 95         |           | g     |
| $M_s$                            | Mounting torque                                                               | 2                                                 |            | 2,5       | Nm    |

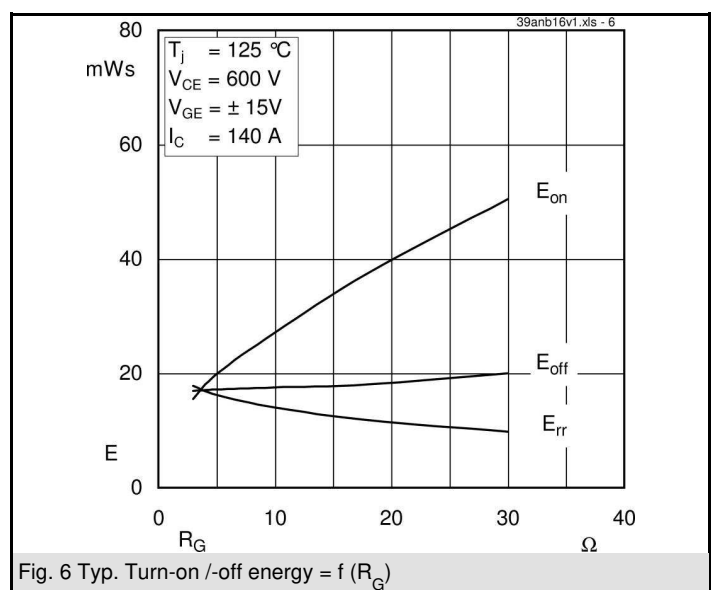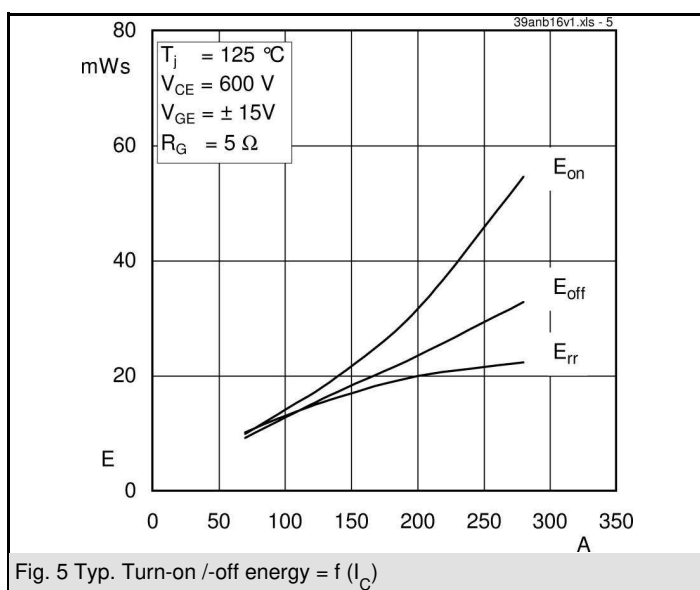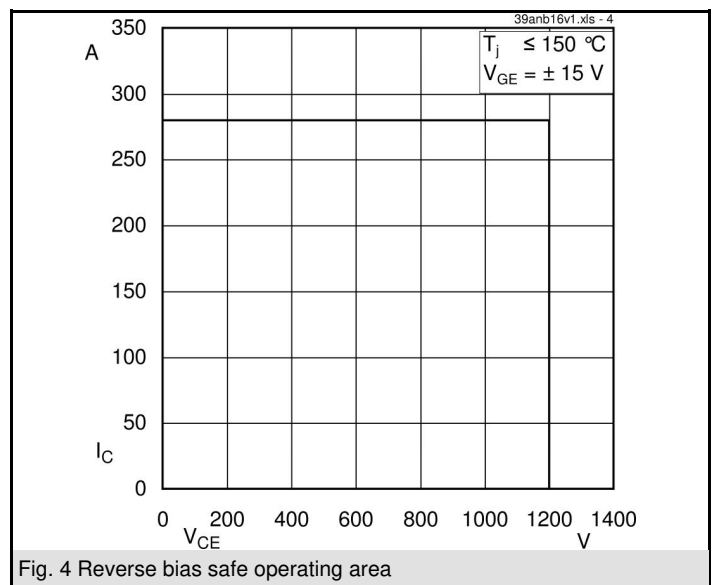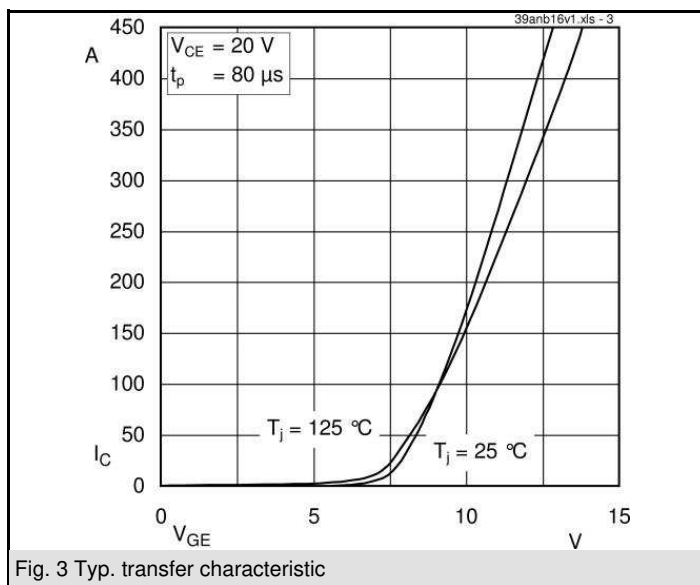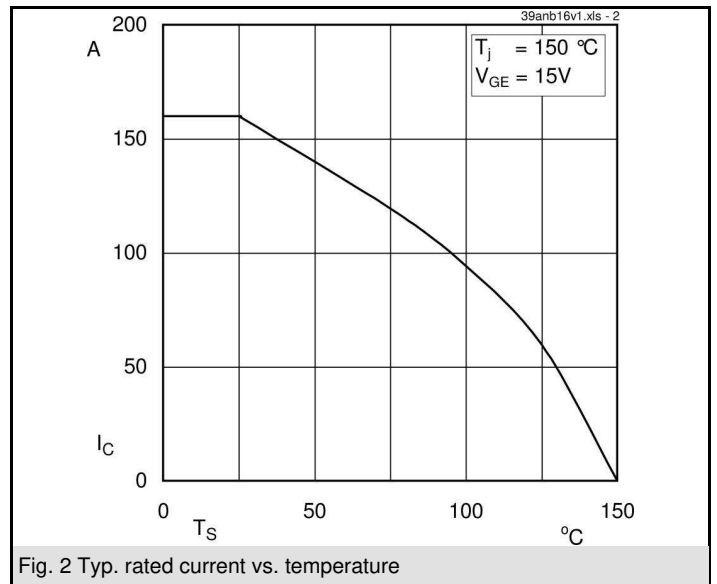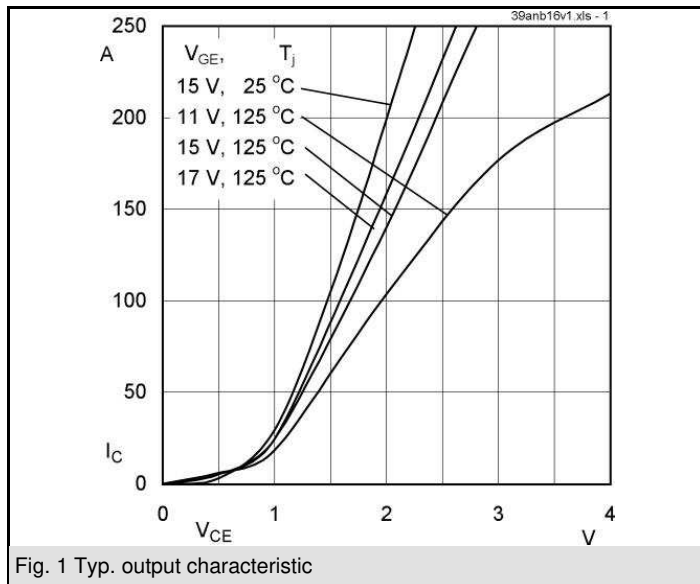

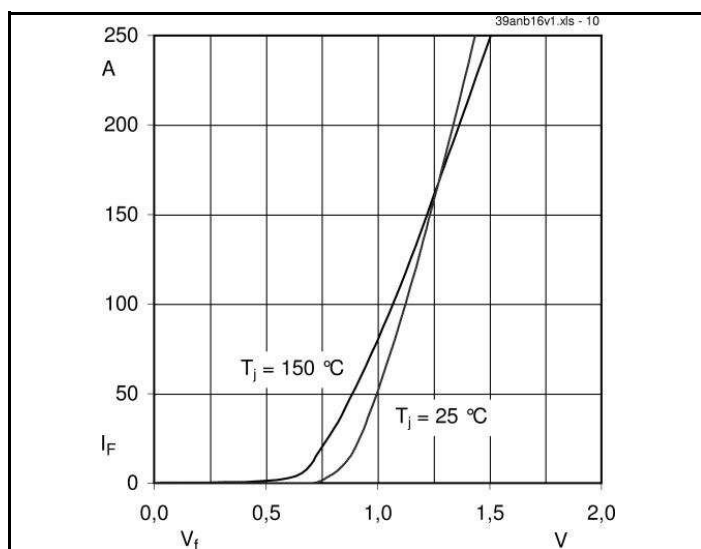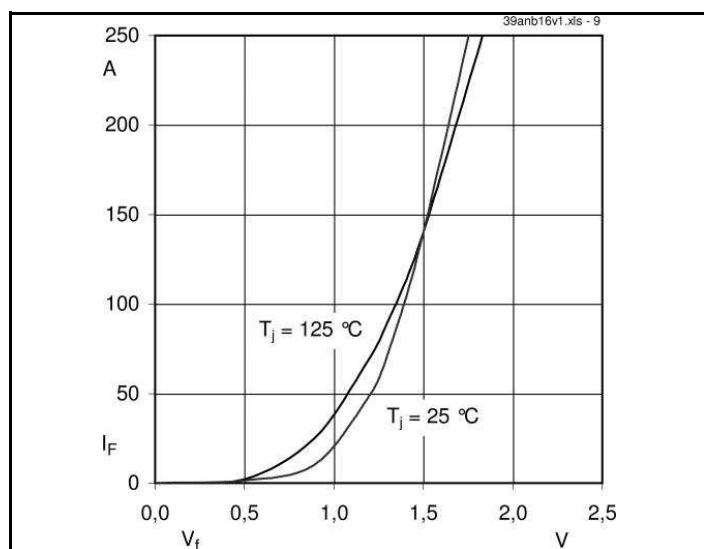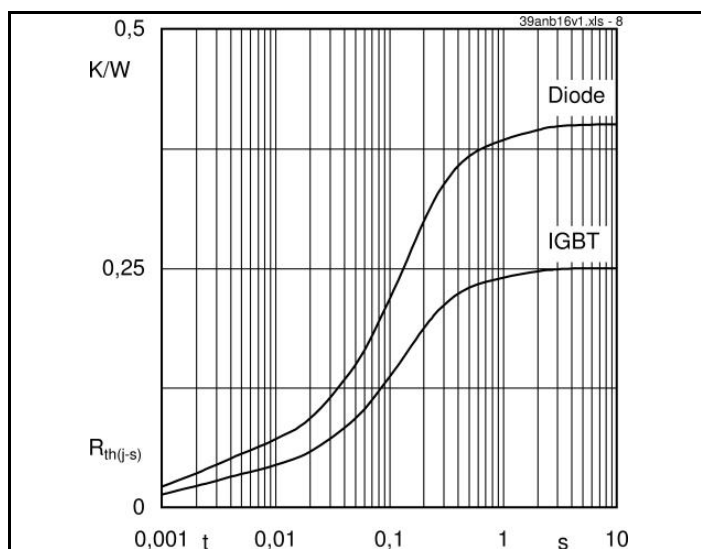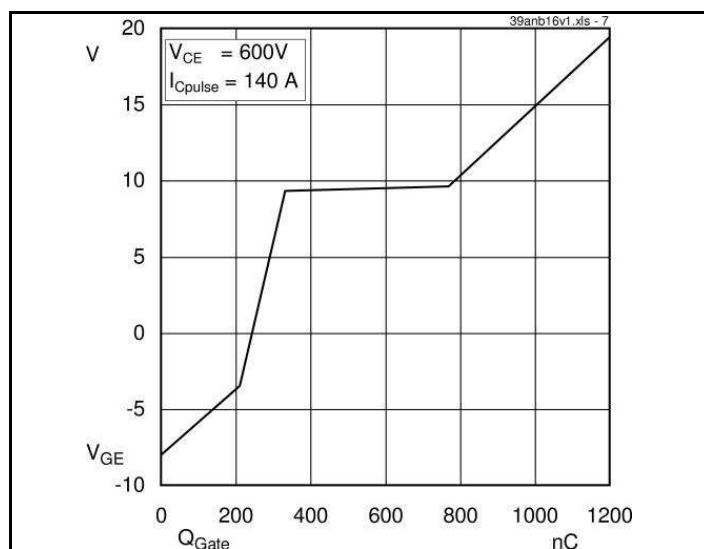

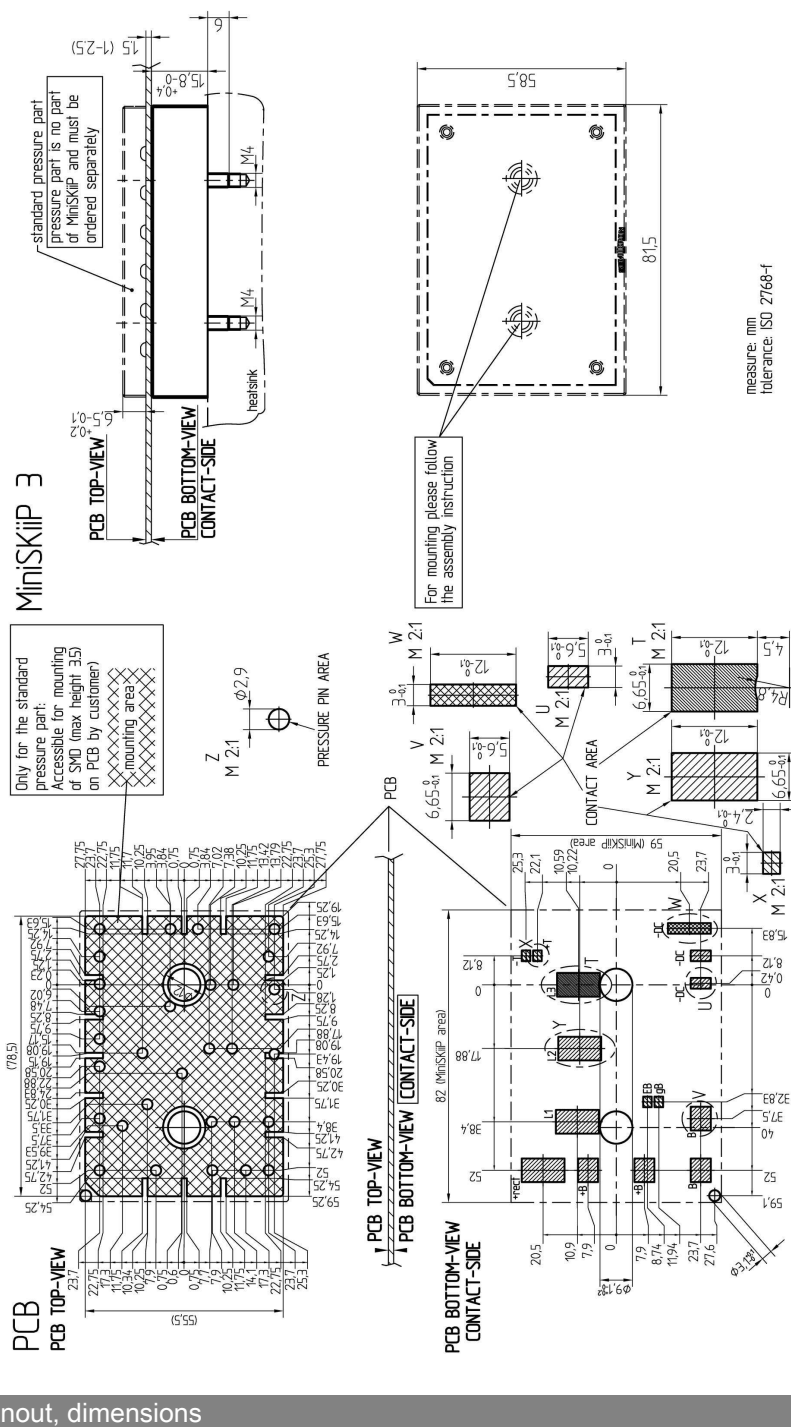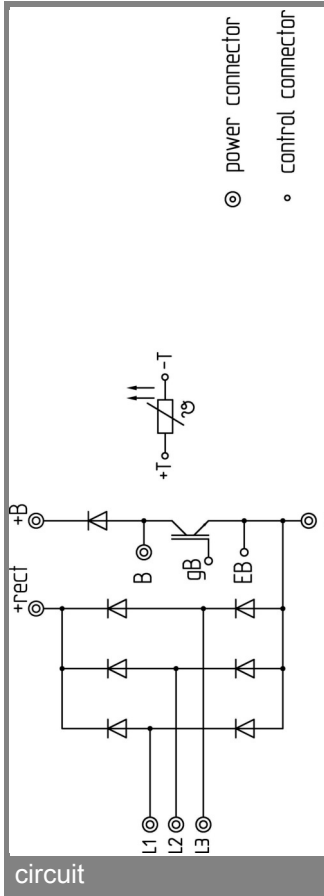

These documents are Semikron property. Semikron reserves all copyrights. All copying and transmitting of this information requires written permission. For the case of industrial property rights, Semikron reserves all rights.

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.